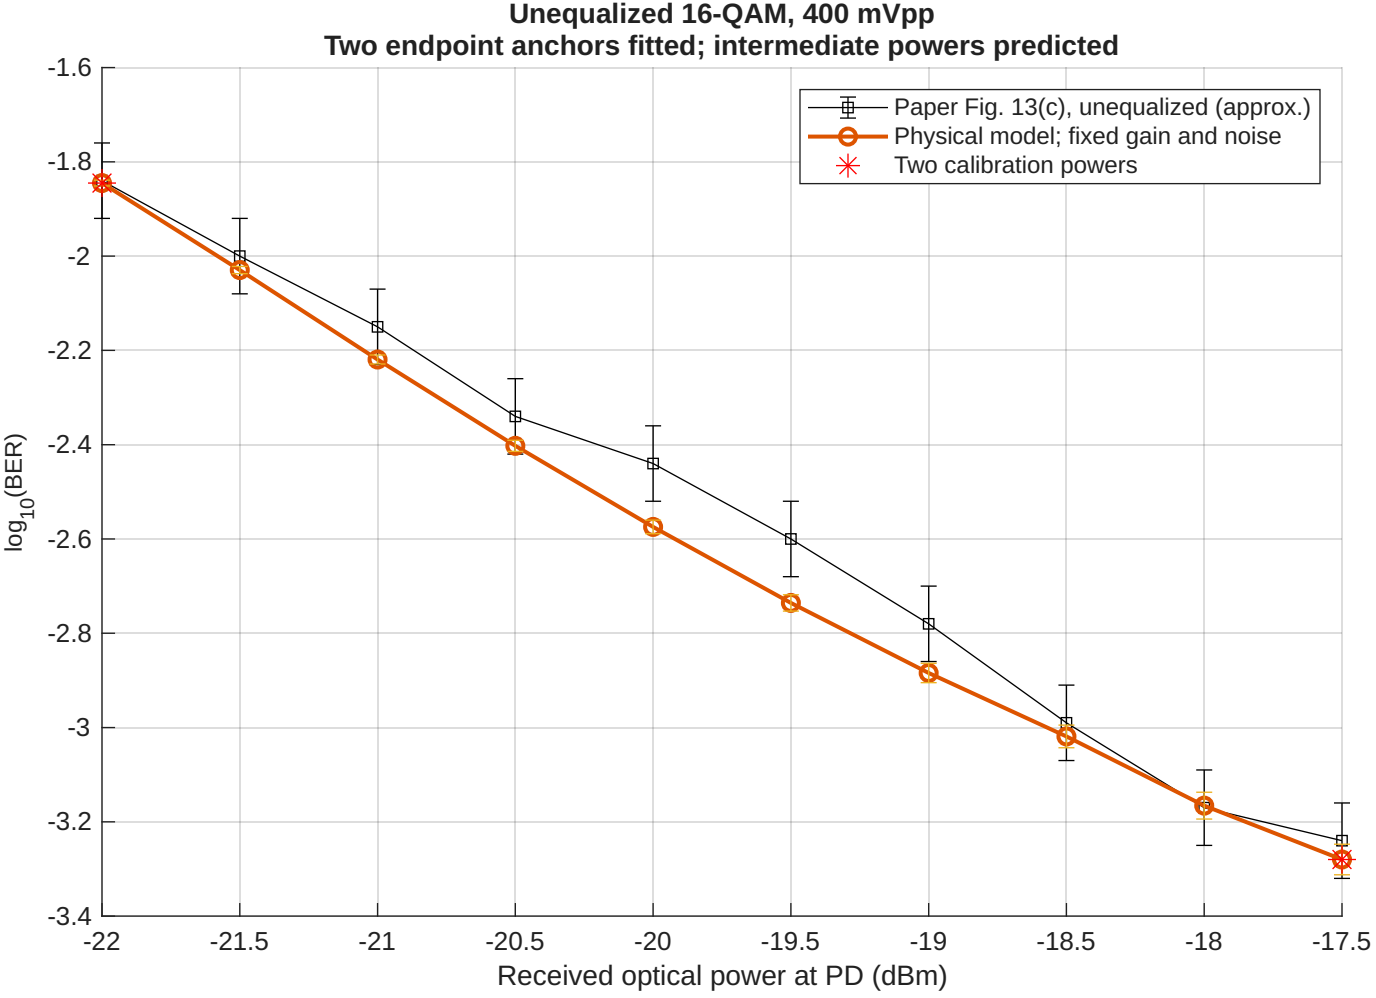
Unequalized 16-QAM, 400 mVpp
Two endpoint anchors fitted; intermediate powers predicted
Paper Fig. 13(c), unequalized (approx.)
Physical model; fixed gain and noise
Two calibration powers
log10(BER)
-1.6
-1.8
-2
-2.2
-2.4
-2.6
-2.8
-3
-3.2
-3.4
-22
-21.5
-21
-20.5
-20
-19.5
-19
-18.5
-18
-17.5
Received optical power at PD (dBm)