



Cairo University Faculty of Engineering

CMPS446 – Image Processing & Computer Vision

Drowsiness Detector Phase 2 Report

Prepared for Dr. Youssef Ghatas Eng. Mohamed Shawky

Prepared by

Name	Code
Ahmed Alaaeldin Ibrahim	1200016
Ahmed Youssef Amer	1200394
Omar Saaed Ali	1200038
Bassant Reda Mohamed	1190056

Abstract	3
Problem Statement	3
Used Algorithms	4
Experiment Results and Analysis Face Detection	4
Eye Detection	
Yawn Detection	5
Performance and Accuracy	6 6
Eye Detection	6
Yawn Detection	6
Work Division Between Team Members	6
Additional Comments:	7

Abstract

Drowsy driving remains a critical safety concern on our roads, leading to accidents, injuries, and fatalities. This project addresses the challenge of enhancing road safety by developing a computer vision-based system for real-time drowsiness detection in drivers. The system monitors driver facial expressions, eye and mouth movements, accurately identifying signs offatigue, such as yawning. When drowsiness is detected, the system triggers an alarm to the driver.

The project's primary objectives are to create efficient real-time processing algorithms, ensure robustness across diverse conditions and demographics, address privacy concerns, anddesign user-friendly alerts. The successful implementation of this system holds the potential to significantly reduce accidents caused by drowsy driving, saving lives and preventing injuries. By combining computer vision, machine learning, and real-time processing, this project contributes to advancing road safety in a technology-driven era.

Problem Statement

The problem at hand is to develop an efficient and reliable computer vision-based system for detecting drowsiness in drivers in real-time, with the primary objective of enhancing road safety and reducing the risk of accidents caused by driver fatigue.

Despite extensive efforts to educate and raise awareness about the dangers of drowsy driving, it remains a critical issue on the roads. The consequences of drowsy driving can be severe, leading to accidents, injuries, and fatalities. Traditional methods, such as monitoring vehicle speed or steering wheel movements, have limitations in accurately identifying drowsy drivers, as they may not manifest noticeable changes until it's too late.

To address this issue, we aim to create a computer vision system capable of monitoring a driver's facial expressions, eye and mouth movements in real-time to detect signs of drowsiness. The system should accurately identify key indicators, such as yawning, and changes in facial expressions that signify fatigue. When drowsiness is detected, the systemshould trigger alerts to the driver, such as visual and/or auditory warnings.

The project presents several challenges, including:

Real-time Processing: The system must process and analyze video data in real-time, making it imperative to develop algorithms that are efficient and capable of running on standard in-car computing hardware.

Robustness: The system should perform reliably under various lighting conditions, weather conditions, and with drivers of different ages, genders, and ethnicities.

User Acceptance: It's crucial to create a system that drivers are willing to adopt anduse. Alerts and notifications must be designed in a way that doesn't cause distractionor irritation to the driver. **Scalability:** The system should be adaptable to different types of vehicles and integrate seamlessly with existing vehicle safety systems.

The successful development of a drowsiness detection system will contribute to reducing the number of accidents caused by drowsy driving, ultimately saving lives and preventing injuries on the road. This project seeks to bring together computer vision, machine learning, and real-time processing to address a pressing issue in road safety.

Used Algorithms

Face Detection

For the face detection module, I tried to follow the Viola & Jones paper however after discovering The need for a neural network to pick the best feature vector, I decided to use HOG as a feature for the face classifier. A sliding window algorithm is applied to each frame, each window is then fed to the classifier to detect if a face is present in it or not. Then the false positives are filtered out and then combining all the detected bounding boxes into one.

Eye Detection

For this system, the algorithm used is trying to calculate the eye aspect ratio and intensity threshold, if the average intensity of both eyes is below certain threshold, print sleepy, and for the eye aspect ratio, it calculates the number of blinks(counts).

Yawn Detection

The system needs a reliable face detection which is necessary for determining the region of interest In the detected face also, it uses an upper and lower colors boundary which is the all available colors for the mouth then comparing the mouth normal aspect ratio to the yawning mouth and after a certain time an alert is initialized for the driver.

Experiment Results and Analysis

Face Detection

Throughout the face detection module's development, real-time testing was performed using the laptop's camera to provide immediate feedback. Despite achieving a 95% accuracy for the trained face classifier, the actual performance fell short of expectations. Numerous instances of false positive detections occurred in almost every trial. As a final solution, a filtering mechanism based on skin segmentation was implemented. This approach yielded satisfactory results under the assumption that the frame does not include human skin parts other than the face and that the background color is not closely resembling human skin.

Strengths

Real-time Testing Integration: The incorporation of real-time testing using the laptop's camera allowed for immediate feedback during the development process, facilitating quick adjustments and improvements.

High Accuracy of Face Classifier: Achieving a 95% accuracy for the trained face classifier demonstrates a robust foundation in face detection capabilities, providing a solid starting point for further refinement.

Adaptive Filtering with Skin Segmentation: The implementation of skin segmentation as a filtering mechanism showcases adaptability in addressing challenges. This approach delivered reasonable results, particularly in scenarios where the frame exclusively contains the face and where the background color does not closely resemble human skin.

Weaknesses

False Positives: Despite the high accuracy of the face classifier in isolation, the actual performance revealed a notable weakness in the form of frequent false positive detections during real-time testing. This issue could potentially lead to inaccuracies in face detection.

Dependency on Assumptions: The effectiveness of the skin segmentation filtering relies on certain assumptions, such as the absence of human skin parts in the frame other than the face and a background color that does not closely resemble human skin. This dependency may limit the module's performance in diverse and dynamic environments.

Limited Generalization: The module's performance may be restricted to specific conditions, and its ability to generalize across various lighting conditions, backgrounds, and skin tones may be a potential weakness. Further testing and refinement are needed to enhance generalization capabilities.

Eye Detection

several test cases as several approaches to detect the eye region and conclude whether the eyes are closed or opened. As there is an approach to detect circular shapes on the upper half of the face, another approach is to build a model with 4000 images datasets(2000 image for each open and closed), tried also morphological operations approach

Strengths

Eye region is detected correctly through the contour.

Weaknesses

The system is very sensitive to lighting conditions.

Not very accurate results to detect whether the person is closing his eyes or not.

Yawn Detection

All test cases for the yawn detection were done using my webcam as I didn't need a dataset except for a person to appear Infront of the camera so all modifications can be done after testing the live camera. So, some test cases failed at very low brightness and also at very high ones. Non bearded people also get some errors as the system detects some of the skin colors along with the mouth color.

Strengths

Real-time Testing Integration: The incorporation of real-time testing using the laptop's camera allowed for immediate feedback during the development process, facilitating quick adjustments and improvements.

Accurate Contours: At acceptable brightness the mouth is detected successfully along with the yawning that is followed by an alert to the driver.

Weaknesses

Brightness Sensitivity: Sensitivity to varying lighting conditions very high or very low brightness.

Multiple Faces: Limited robustness in scenarios with multiple faces.

Performance and Accuracy

Face Detection

The face detection module, while demonstrating high accuracy in its face classifier in controlled conditions, faces notable challenges in actual performance. Frequent false positive detections observed during real-time testing unveil a crucial weakness that could introduce inaccuracies in face detection, compromising the module's reliability in dynamic scenarios. Furthermore, the module's dependency on assumptions, particularly regarding the absence of human skin parts outside the face and specific background color conditions, raises concerns about its adaptability to diverse environments. This dependency may limit the module's effectiveness, emphasizing the need for thorough testing and refinement to enhance its robustness in real-world applications. Additionally, the module's limited generalization to specific conditions, such as lighting, backgrounds, and skin tones, underscores the imperative for ongoing testing and refinement efforts to broaden its scope and improve overall performance.

Eye Detection

Eye detection approach successfully drawn contour around eye region in several occasions and different lighting conditions. However, detecting whether the person has his eyes opened or closed is not very accurate. The method is used to give an intensity threshold to be compared to for the eye region and this method needs several assumptions.

Yawn Detection

The yawn detection can be considered a very accurate part in our project as this accuracy was reached after several trials and after adding the colors boundary and the region of interest in the face detection. But, at lower brightness the system can't detect the mouth as it is out of the colors boundary so I believe this issue needs a night vision camera that can detect the faces even at dark brightness. Another issue is that if the hand appeared above the mouth it is also detected as its close to the mouth color but in our application the driver must have his both hands on the driving wheel.

Work Division Between Team Members

Face Detection Module: Ahmed Alaa Yawn Detection Module: Omar Saeed

Eye Detection Module: Ahmed Youssef & bassant

Additional Comments: Unfortunately, we didn't reach any further improvement in the eye detection part. As it gives not				
very accurate results. We tried our best in it.				
7				

Rapid Object Detection using a Boosted Cascade of Simple Features

Paul Viola viola@merl.com Mitsubishi Electric Research Labs 201 Broadway, 8th FL Cambridge, MA 02139 Michael Jones
mjones@crl.dec.com
Compaq CRL
One Cambridge Center
Cambridge, MA 02142

Abstract

This paper describes a machine learning approach for visual object detection which is capable of processing images extremely rapidly and achieving high detection rates. This work is distinguished by three key contributions. The first is the introduction of a new image representation called the "Integral Image" which allows the features used by our detector to be computed very quickly. The second is a learning algorithm, based on AdaBoost, which selects a small number of critical visual features from a larger set and yields extremely efficient classifiers[6]. The third contribution is a method for combining increasingly more complex classifiers in a "cascade" which allows background regions of the image to be quickly discarded while spending more computation on promising object-like regions. The cascade can be viewed as an object specific focus-of-attention mechanism which unlike previous approaches provides statistical guarantees that discarded regions are unlikely to contain the object of interest. In the domain of face detection the system yields detection rates comparable to the best previous systems. Used in real-time applications, the detector runs at 15 frames per second without resorting to image differencing or skin color detection.

1. Introduction

This paper brings together new algorithms and insights to construct a framework for robust and extremely rapid object detection. This framework is demonstrated on, and in part motivated by, the task of face detection. Toward this end we have constructed a frontal face detection system which achieves detection and false positive rates which are equivalent to the best published results [16, 12, 15, 11, 1]. This face detection system is most clearly distinguished from previous approaches in its ability to detect faces extremely rapidly. Operating on 384 by 288 pixel images, faces are de-

tected at 15 frames per second on a conventional 700 MHz Intel Pentium III. In other face detection systems, auxiliary information, such as image differences in video sequences, or pixel color in color images, have been used to achieve high frame rates. Our system achieves high frame rates working only with the information present in a single grey scale image. These alternative sources of information can also be integrated with our system to achieve even higher frame rates.

There are three main contributions of our object detection framework. We will introduce each of these ideas briefly below and then describe them in detail in subsequent sections.

The first contribution of this paper is a new image representation called an *integral image* that allows for very fast feature evaluation. Motivated in part by the work of Papageorgiou et al. our detection system does not work directly with image intensities [10]. Like these authors we use a set of features which are reminiscent of Haar Basis functions (though we will also use related filters which are more complex than Haar filters). In order to compute these features very rapidly at many scales we introduce the integral image representation for images. The integral image can be computed from an image using a few operations per pixel. Once computed, any one of these Harr-like features can be computed at any scale or location in *constant* time.

The second contribution of this paper is a method for constructing a classifier by selecting a small number of important features using AdaBoost [6]. Within any image subwindow the total number of Harr-like features is very large, far larger than the number of pixels. In order to ensure fast classification, the learning process must exclude a large majority of the available features, and focus on a small set of critical features. Motivated by the work of Tieu and Viola, feature selection is achieved through a simple modification of the AdaBoost procedure: the weak learner is constrained so that each weak classifier returned can depend on only a

single feature [2]. As a result each stage of the boosting process, which selects a new weak classifier, can be viewed as a feature selection process. AdaBoost provides an effective learning algorithm and strong bounds on generalization performance [13, 9, 10].

The third major contribution of this paper is a method for combining successively more complex classifiers in a cascade structure which dramatically increases the speed of the detector by focusing attention on promising regions of the image. The notion behind focus of attention approaches is that it is often possible to rapidly determine where in an image an object might occur [17, 8, 1]. More complex processing is reserved only for these promising regions. The key measure of such an approach is the "false negative" rate of the attentional process. It must be the case that all, or almost all, object instances are selected by the attentional filter.

We will describe a process for training an extremely simple and efficient classifier which can be used as a "supervised" focus of attention operator. The term supervised refers to the fact that the attentional operator is trained to detect examples of a particular class. In the domain of face detection it is possible to achieve fewer than 1% false negatives and 40% false positives using a classifier constructed from two Harr-like features. The effect of this filter is to reduce by over one half the number of locations where the final detector must be evaluated.

Those sub-windows which are not rejected by the initial classifier are processed by a sequence of classifiers, each slightly more complex than the last. If any classifier rejects the sub-window, no further processing is performed. The structure of the cascaded detection process is essentially that of a degenerate decision tree, and as such is related to the work of Geman and colleagues [1, 4].

An extremely fast face detector will have broad practical applications. These include user interfaces, image databases, and teleconferencing. In applications where rapid frame-rates are not necessary, our system will allow for significant additional post-processing and analysis. In addition our system can be implemented on a wide range of small low power devices, including hand-helds and embedded processors. In our lab we have implemented this face detector on the Compaq iPaq handheld and have achieved detection at two frames per second (this device has a low power 200 mips *Strong Arm* processor which lacks floating point hardware).

The remainder of the paper describes our contributions and a number of experimental results, including a detailed description of our experimental methodology. Discussion of closely related work takes place at the end of each section.

2. Features

Our object detection procedure classifies images based on the value of simple features. There are many motivations




Figure 1: Example rectangle features shown relative to the enclosing detection window. The sum of the pixels which lie within the white rectangles are subtracted from the sum of pixels in the grey rectangles. Two-rectangle features are shown in (A) and (B). Figure (C) shows a three-rectangle feature, and (D) a four-rectangle feature.

for using features rather than the pixels directly. The most common reason is that features can act to encode ad-hoc domain knowledge that is difficult to learn using a finite quantity of training data. For this system there is also a second critical motivation for features: the feature based system operates much faster than a pixel-based system.

The simple features used are reminiscent of Haar basis functions which have been used by Papageorgiou et al. [10]. More specifically, we use three kinds of features. The value of a *two-rectangle feature* is the difference between the sum of the pixels within two rectangular regions. The regions have the same size and shape and are horizontally or vertically adjacent (see Figure 1). A *three-rectangle feature* computes the sum within two outside rectangles subtracted from the sum in a center rectangle. Finally a *four-rectangle feature* computes the difference between diagonal pairs of rectangles.

Given that the base resolution of the detector is 24x24, the exhaustive set of rectangle features is quite large, over 180,000. Note that unlike the Haar basis, the set of rectangle features is overcomplete¹.

2.1. Integral Image

Rectangle features can be computed very rapidly using an intermediate representation for the image which we call the integral image.² The integral image at location x, y contains the sum of the pixels above and to the left of x, y, inclusive:

$$ii(x,y) = \sum_{x' \le x, y' \le y} i(x',y'),$$

¹A complete basis has no linear dependence between basis elements and has the same number of elements as the image space, in this case 576. The full set of 180,000 thousand features is many times over-complete.

²There is a close relation to "summed area tables" as used in graphics [3]. We choose a different name here in order to emphasize its use for the analysis of images, rather than for texture mapping.




Figure 2: The sum of the pixels within rectangle D can be computed with four array references. The value of the integral image at location 1 is the sum of the pixels in rectangle A. The value at location 2 is A + B, at location 3 is A + C, and at location 4 is A + B + C + D. The sum within D can be computed as 4 + 1 - (2 + 3).

where ii(x, y) is the integral image and i(x, y) is the original image. Using the following pair of recurrences:

$$s(x,y) = s(x,y-1) + i(x,y)$$
 (1)

$$ii(x,y) = ii(x-1,y) + s(x,y)$$
 (2)

(where s(x, y) is the cumulative row sum, s(x, -1) = 0, and ii(-1, y) = 0) the integral image can be computed in one pass over the original image.

Using the integral image any rectangular sum can be computed in four array references (see Figure 2). Clearly the difference between two rectangular sums can be computed in eight references. Since the two-rectangle features defined above involve adjacent rectangular sums they can be computed in six array references, eight in the case of the three-rectangle features, and nine for four-rectangle features.

2.2. Feature Discussion

Rectangle features are somewhat primitive when compared with alternatives such as steerable filters [5, 7]. Steerable filters, and their relatives, are excellent for the detailed analysis of boundaries, image compression, and texture analysis. In contrast rectangle features, while sensitive to the presence of edges, bars, and other simple image structure, are quite coarse. Unlike steerable filters the only orientations available are vertical, horizontal, and diagonal. The set of rectangle features do however provide a rich image representation which supports effective learning. In conjunction with the integral image, the efficiency of the rectangle feature set provides ample compensation for their limited flexibility.

3. Learning Classification Functions

Given a feature set and a training set of positive and negative images, any number of machine learning approaches

could be used to learn a classification function. In our system a variant of AdaBoost is used *both* to select a small set of features *and* train the classifier [6]. In its original form, the AdaBoost learning algorithm is used to boost the classification performance of a simple (sometimes called weak) learning algorithm. There are a number of formal guarantees provided by the AdaBoost learning procedure. Freund and Schapire proved that the training error of the strong classifier approaches zero exponentially in the number of rounds. More importantly a number of results were later proved about generalization performance [14]. The key insight is that generalization performance is related to the margin of the examples, and that AdaBoost achieves large margins rapidly.

Recall that there are over 180,000 rectangle features associated with each image sub-window, a number far larger than the number of pixels. Even though each feature can be computed very efficiently, computing the complete set is prohibitively expensive. Our hypothesis, which is borne out by experiment, is that a very small number of these features can be combined to form an effective classifier. The main challenge is to find these features.

In support of this goal, the weak learning algorithm is designed to select the single rectangle feature which best separates the positive and negative examples (this is similar to the approach of [2] in the domain of image database retrieval). For each feature, the weak learner determines the optimal threshold classification function, such that the minimum number of examples are misclassified. A weak classifier $h_j(x)$ thus consists of a feature f_j , a threshold θ_j and a parity p_j indicating the direction of the inequality sign:

$$h_j(x) = \begin{cases} 1 & \text{if } p_j f_j(x) < p_j \theta_j \\ 0 & \text{otherwise} \end{cases}$$

Here x is a 24x24 pixel sub-window of an image. See Table 1 for a summary of the boosting process.

In practice no single feature can perform the classification task with low error. Features which are selected in early rounds of the boosting process had error rates between 0.1 and 0.3. Features selected in later rounds, as the task becomes more difficult, yield error rates between 0.4 and 0.5.

3.1. Learning Discussion

Many general feature selection procedures have been proposed (see chapter 8 of [18] for a review). Our final application demanded a very aggressive approach which would discard the vast majority of features. For a similar recognition problem Papageorgiou et al. proposed a scheme for feature selection based on feature variance [10]. They demonstrated good results selecting 37 features out of a total 1734 features.

Roth et al. propose a feature selection process based on the Winnow exponential perceptron learning rule [11]. The Winnow learning process converges to a solution where many of these weights are zero. Nevertheless a very large

- Given example images $(x_1, y_1), \ldots, (x_n, y_n)$ where $y_i = 0, 1$ for negative and positive examples respectively.
- Initialize weights $w_{1,i} = \frac{1}{2m}$, $\frac{1}{2l}$ for $y_i = 0, 1$ respectively, where m and l are the number of negatives and positives respectively.
- For t = 1, ..., T:
 - 1. Normalize the weights,

$$w_{t,i} \leftarrow \frac{w_{t,i}}{\sum_{j=1}^{n} w_{t,j}}$$

so that w_t is a probability distribution.

- 2. For each feature, j, train a classifier h_j which is restricted to using a single feature. The error is evaluated with respect to w_t , $\epsilon_j = \sum_i w_i |h_j(x_i) y_i|$.
- 3. Choose the classifier, h_t , with the lowest error ϵ_t .
- 4. Update the weights:

$$w_{t+1,i} = w_{t,i}\beta_t^{1-e_i}$$

where $e_i=0$ if example x_i is classified correctly, $e_i=1$ otherwise, and $\beta_t=\frac{\epsilon_t}{1-\epsilon_t}$.

• The final strong classifier is:

$$h(x) = \begin{cases} 1 & \sum_{t=1}^{T} \alpha_t h_t(x) \ge \frac{1}{2} \sum_{t=1}^{T} \alpha_t \\ 0 & \text{otherwise} \end{cases}$$

where $\alpha_t = \log \frac{1}{\beta_t}$

Table 1: The AdaBoost algorithm for classifier learning. Each round of boosting selects one feature from the 180,000 potential features.

number of features are retained (perhaps a few hundred or thousand).

3.2. Learning Results

While details on the training and performance of the final system are presented in Section 5, several simple results merit discussion. Initial experiments demonstrated that a frontal face classifier constructed from 200 features yields a detection rate of 95% with a false positive rate of 1 in 14084. These results are compelling, but not sufficient for many real-world tasks. In terms of computation, this classifier is probably faster than any other published system, requiring 0.7 seconds to scan an 384 by 288 pixel image. Unfortunately, the most straightforward technique for improving detection performance, adding features to the classifier, directly increases computation time.

For the task of face detection, the initial rectangle features selected by AdaBoost are meaningful and easily interpreted. The first feature selected seems to focus on the property that the region of the eyes is often darker than the region

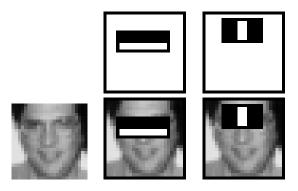


Figure 3: The first and second features selected by AdaBoost. The two features are shown in the top row and then overlayed on a typical training face in the bottom row. The first feature measures the difference in intensity between the region of the eyes and a region across the upper cheeks. The feature capitalizes on the observation that the eye region is often darker than the cheeks. The second feature compares the intensities in the eye regions to the intensity across the bridge of the nose.

of the nose and cheeks (see Figure 3). This feature is relatively large in comparison with the detection sub-window, and should be somewhat insensitive to size and location of the face. The second feature selected relies on the property that the eyes are darker than the bridge of the nose.

4. The Attentional Cascade

This section describes an algorithm for constructing a cascade of classifiers which achieves increased detection performance while radically reducing computation time. The key insight is that smaller, and therefore more efficient, boosted classifiers can be constructed which reject many of the negative sub-windows while detecting almost all positive instances (i.e. the threshold of a boosted classifier can be adjusted so that the false negative rate is close to zero). Simpler classifiers are used to reject the majority of sub-windows before more complex classifiers are called upon to achieve low false positive rates.

The overall form of the detection process is that of a degenerate decision tree, what we call a "cascade" (see Figure 4). A positive result from the first classifier triggers the evaluation of a second classifier which has also been adjusted to achieve very high detection rates. A positive result from the second classifier triggers a third classifier, and so on. A negative outcome at any point leads to the immediate rejection of the sub-window.

Stages in the cascade are constructed by training classifiers using AdaBoost and then adjusting the threshold to minimize false negatives. Note that the default AdaBoost threshold is designed to yield a low error rate on the training data. In general a lower threshold yields higher detec-

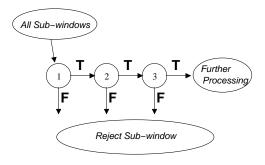


Figure 4: Schematic depiction of a the detection cascade. A series of classifiers are applied to every sub-window. The initial classifier eliminates a large number of negative examples with very little processing. Subsequent layers eliminate additional negatives but require additional computation. After several stages of processing the number of sub-windows have been reduced radically. Further processing can take any form such as additional stages of the cascade (as in our detection system) or an alternative detection system.

tion rates and higher false positive rates.

For example an excellent first stage classifier can be constructed from a two-feature strong classifier by reducing the threshold to minimize false negatives. Measured against a validation training set, the threshold can be adjusted to detect 100% of the faces with a false positive rate of 40%. See Figure 3 for a description of the two features used in this classifier.

Computation of the two feature classifier amounts to about 60 microprocessor instructions. It seems hard to imagine that any simpler filter could achieve higher rejection rates. By comparison, scanning a simple image template, or a single layer perceptron, would require at least 20 times as many operations per sub-window.

The structure of the cascade reflects the fact that within any single image an overwhelming majority of sub-windows are negative. As such, the cascade attempts to reject as many negatives as possible at the earliest stage possible. While a positive instance will trigger the evaluation of every classifier in the cascade, this is an exceedingly rare event.

Much like a decision tree, subsequent classifiers are trained using those examples which pass through all the previous stages. As a result, the second classifier faces a more difficult task than the first. The examples which make it through the first stage are "harder" than typical examples. The more difficult examples faced by deeper classifiers push the entire receiver operating characteristic (ROC) curve downward. At a given detection rate, deeper classifiers have correspondingly higher false positive rates.

4.1. Training a Cascade of Classifiers

The cascade training process involves two types of tradeoffs. In most cases classifiers with more features will achieve higher detection rates and lower false positive rates. At the same time classifiers with more features require more time to compute. In principle one could define an optimization framework in which: i) the number of classifier stages, ii) the number of features in each stage, and iii) the threshold of each stage, are traded off in order to minimize the expected number of evaluated features. Unfortunately finding this optimum is a tremendously difficult problem.

In practice a very simple framework is used to produce an effective classifier which is highly efficient. Each stage in the cascade reduces the false positive rate and decreases the detection rate. A target is selected for the minimum reduction in false positives and the maximum decrease in detection. Each stage is trained by adding features until the target detection and false positives rates are met (these rates are determined by testing the detector on a validation set). Stages are added until the overall target for false positive and detection rate is met.

4.2. Detector Cascade Discussion

The complete face detection cascade has 38 stages with over 6000 features. Nevertheless the cascade structure results in fast average detection times. On a difficult dataset, containing 507 faces and 75 million sub-windows, faces are detected using an average of 10 feature evaluations per sub-window. In comparison, this system is about 15 times faster than an implementation of the detection system constructed by Rowley et al.³ [12]

A notion similar to the cascade appears in the face detection system described by Rowley et al. in which two detection networks are used [12]. Rowley et al. used a faster yet less accurate network to prescreen the image in order to find candidate regions for a slower more accurate network. Though it is difficult to determine exactly, it appears that Rowley et al.'s two network face system is the fastest existing face detector.⁴

The structure of the cascaded detection process is essentially that of a degenerate decision tree, and as such is related to the work of Amit and Geman [1]. Unlike techniques which use a fixed detector, Amit and Geman propose an alternative point of view where unusual co-occurrences of simple image features are used to trigger the evaluation of a more complex detection process. In this way the full detection process need not be evaluated at many of the potential image locations and scales. While this basic insight

³Henry Rowley very graciously supplied us with implementations of his detection system for direct comparison. Reported results are against his fastest system. It is difficult to determine from the published literature, but the Rowley-Baluja-Kanade detector is widely considered the fastest detection system and has been heavily tested on real-world problems.

⁴Other published detectors have either neglected to discuss performance in detail, or have never published detection and false positive rates on a large and difficult training set.

is very valuable, in their implementation it is necessary to first evaluate some feature detector at every location. These features are then grouped to find unusual co-occurrences. In practice, since the form of our detector and the features that it uses are extremely efficient, the amortized cost of evaluating our detector at *every scale and location* is much faster than finding and grouping edges throughout the image.

In recent work Fleuret and Geman have presented a face detection technique which relies on a "chain" of tests in order to signify the presence of a face at a particular scale and location [4]. The image properties measured by Fleuret and Geman, disjunctions of fine scale edges, are quite different than rectangle features which are simple, exist at all scales, and are somewhat interpretable. The two approaches also differ radically in their learning philosophy. The motivation for Fleuret and Geman's learning process is density estimation and density discrimination, while our detector is purely discriminative. Finally the false positive rate of Fleuret and Geman's approach appears to be higher than that of previous approaches like Rowley et al. and this approach. Unfortunately the paper does not report quantitative results of this kind. The included example images each have between 2 and 10 false positives.

5 Results

A 38 layer cascaded classifier was trained to detect frontal upright faces. To train the detector, a set of face and non-face training images were used. The face training set consisted of 4916 hand labeled faces scaled and aligned to a base resolution of 24 by 24 pixels. The faces were extracted from images downloaded during a random crawl of the world wide web. Some typical face examples are shown in Figure 5. The non-face subwindows used to train the detector come from 9544 images which were manually inspected and found to not contain any faces. There are about 350 million subwindows within these non-face images.

The number of features in the first five layers of the detector is 1, 10, 25, 25 and 50 features respectively. The remaining layers have increasingly more features. The total number of features in all layers is 6061.

Each classifier in the cascade was trained with the 4916 training faces (plus their vertical mirror images for a total of 9832 training faces) and 10,000 non-face sub-windows (also of size 24 by 24 pixels) using the Adaboost training procedure. For the initial one feature classifier, the non-face training examples were collected by selecting random sub-windows from a set of 9544 images which did not contain faces. The non-face examples used to train subsequent layers were obtained by scanning the partial cascade across the non-face images and collecting false positives. A maximum of 10000 such non-face sub-windows were collected for each layer.

Speed of the Final Detector



Figure 5: Example of frontal upright face images used for training.

The speed of the cascaded detector is directly related to the number of features evaluated per scanned sub-window. Evaluated on the MIT+CMU test set [12], an average of 10 features out of a total of 6061 are evaluated per sub-window. This is possible because a large majority of sub-windows are rejected by the first or second layer in the cascade. On a 700 Mhz Pentium III processor, the face detector can process a 384 by 288 pixel image in about .067 seconds (using a starting scale of 1.25 and a step size of 1.5 described below). This is roughly 15 times faster than the Rowley-Baluja-Kanade detector [12] and about 600 times faster than the Schneiderman-Kanade detector [15].

Image Processing

All example sub-windows used for training were variance normalized to minimize the effect of different lighting conditions. Normalization is therefore necessary during detection as well. The variance of an image sub-window can be computed quickly using a pair of integral images. Recall that $\sigma^2 = m^2 - \frac{1}{N} \sum x^2$, where σ is the standard deviation, m is the mean, and x is the pixel value within the sub-window. The mean of a sub-window can be computed using the integral image. The sum of squared pixels is computed using an integral image of the image squared (i.e. two integral images are used in the scanning process). During scanning the effect of image normalization can be achieved by post-multiplying the feature values rather than pre-multiplying the pixels.

Scanning the Detector

The final detector is scanned across the image at multiple scales and locations. Scaling is achieved by scaling the detector itself, rather than scaling the image. This process makes sense because the features can be evaluated at any

False detections							
Detector	10	31	50	65	78	95	167
Viola-Jones	76.1%	88.4%	91.4%	92.0%	92.1%	92.9%	93.9%
Viola-Jones (voting)	81.1%	89.7%	92.1%	93.1%	93.1%	93.2 %	93.7%
Rowley-Baluja-Kanade	83.2%	86.0%	-	-	-	89.2%	90.1%
Schneiderman-Kanade	-	-	-	94.4%	-	-	-
Roth-Yang-Ahuja	-	-	-	-	(94.8%)	-	-

Table 2: Detection rates for various numbers of false positives on the MIT+CMU test set containing 130 images and 507 faces.

scale with the same cost. Good results were obtained using a set of scales a factor of 1.25 apart.

The detector is also scanned across location. Subsequent locations are obtained by shifting the window some number of pixels Δ . This shifting process is affected by the scale of the detector: if the current scale is s the window is shifted by $[s\Delta]$, where [] is the rounding operation.

The choice of Δ affects both the speed of the detector as well as accuracy. The results we present are for $\Delta=1.0$. We can achieve a significant speedup by setting $\Delta=1.5$ with only a slight decrease in accuracy.

Integration of Multiple Detections

Since the final detector is insensitive to small changes in translation and scale, multiple detections will usually occur around each face in a scanned image. The same is often true of some types of false positives. In practice it often makes sense to return one final detection per face. Toward this end it is useful to postprocess the detected sub-windows in order to combine overlapping detections into a single detection.

In these experiments detections are combined in a very simple fashion. The set of detections are first partitioned into disjoint subsets. Two detections are in the same subset if their bounding regions overlap. Each partition yields a single final detection. The corners of the final bounding region are the average of the corners of all detections in the set.

Experiments on a Real-World Test Set

We tested our system on the MIT+CMU frontal face test set [12]. This set consists of 130 images with 507 labeled frontal faces. A ROC curve showing the performance of our detector on this test set is shown in Figure 6. To create the ROC curve the threshold of the final layer classifier is adjusted from $-\infty$ to $+\infty$. Adjusting the threshold to $+\infty$ will yield a detection rate of 0.0 and a false positive rate of 0.0. Adjusting the threshold to $-\infty$, however, increases both the detection rate and false positive rate, but only to a certain point. Neither rate can be higher than the rate of the detection cascade minus the final layer. In effect, a threshold of $-\infty$ is equivalent to removing that layer. Further increasing the detection and false positive rates requires decreasing the threshold of the next classifier in the cascade.

Thus, in order to construct a complete ROC curve, classifier layers are removed. We use the *number* of false positives as opposed to the *rate* of false positives for the x-axis of the ROC curve to facilitate comparison with other systems. To compute the false positive rate, simply divide by the total number of sub-windows scanned. In our experiments, the number of sub-windows scanned is 75,081,800.

Unfortunately, most previous published results on face detection have only included a single operating regime (i.e. single point on the ROC curve). To make comparison with our detector easier we have listed our detection rate for the false positive rates reported by the other systems. Table 2 lists the detection rate for various numbers of false detections for our system as well as other published systems. For the Rowley-Baluja-Kanade results [12], a number of different versions of their detector were tested yielding a number of different results they are all listed in under the same heading. For the Roth-Yang-Ahuja detector [11], they reported their result on the MIT+CMU test set minus 5 images containing line drawn faces removed.

Figure 7 shows the output of our face detector on some test images from the MIT+CMU test set.

A simple voting scheme to further improve results

In table 2 we also show results from running three detectors (the 38 layer one described above plus two similarly trained detectors) and outputting the majority vote of the three detectors. This improves the detection rate as well as eliminating more false positives. The improvement would be greater if the detectors were more independent. The correlation of their errors results in a modest improvement over the best single detector.

6 Conclusions

We have presented an approach for object detection which minimizes computation time while achieving high detection accuracy. The approach was used to construct a face detection system which is approximately 15 faster than any previous approach.

This paper brings together new algorithms, representations, and insights which are quite generic and may well








Figure 7: Output of our face detector on a number of test images from the MIT+CMU test set.

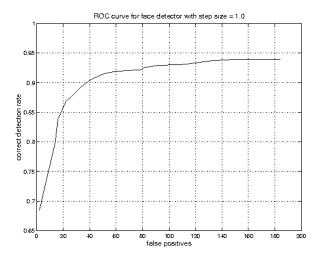


Figure 6: ROC curve for our face detector on the MIT+CMU test set. The detector was run using a step size of 1.0 and starting scale of 1.0 (75,081,800 sub-windows scanned).

have broader application in computer vision and image processing.

Finally this paper presents a set of detailed experiments on a difficult face detection dataset which has been widely studied. This dataset includes faces under a very wide range of conditions including: illumination, scale, pose, and camera variation. Experiments on such a large and complex dataset are difficult and time consuming. Nevertheless systems which work under these conditions are unlikely to be brittle or limited to a single set of conditions. More importantly conclusions drawn from this dataset are unlikely to be experimental artifacts.

References

- [1] Y. Amit, D. Geman, and K. Wilder. Joint induction of shape features and tree classifiers, 1997.
- [2] Anonymous. Anonymous. In Anonymous, 2000.

- [3] F. Crow. Summed-area tables for texture mapping. In Proceedings of SIGGRAPH, volume 18(3), pages 207–212, 1984.
- [4] F. Fleuret and D. Geman. Coarse-to-fine face detection. *Int. J. Computer Vision*, 2001.
- [5] William T. Freeman and Edward H. Adelson. The design and use of steerable filters. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 13(9):891–906, 1991.
- [6] Yoav Freund and Robert E. Schapire. A decision-theoretic generalization of on-line learning and an application to boosting. In *Computational Learning Theory: Eurocolt* '95, pages 23–37. Springer-Verlag, 1995.
- [7] H. Greenspan, S. Belongie, R. Gooodman, P. Perona, S. Rakshit, and C. Anderson. Overcomplete steerable pyramid filters and rotation invariance. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 1994.
- [8] L. Itti, C. Koch, and E. Niebur. A model of saliency-based visual attention for rapid scene analysis. *IEEE Patt. Anal. Mach. Intell.*, 20(11):1254–1259, November 1998.
- [9] Edgar Osuna, Robert Freund, and Federico Girosi. Training support vector machines: an application to face detection. In Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, 1997.
- [10] C. Papageorgiou, M. Oren, and T. Poggio. A general framework for object detection. In *International Conference on Computer Vision*, 1998.
- [11] D. Roth, M. Yang, and N. Ahuja. A snowbased face detector. In *Neural Information Processing* 12, 2000.
- [12] H. Rowley, S. Baluja, and T. Kanade. Neural network-based face detection. In *IEEE Patt. Anal. Mach. Intell.*, volume 20, pages 22–38, 1998.
- [13] R. E. Schapire, Y. Freund, P. Bartlett, and W. S. Lee. Boosting the margin: a new explanation for the effectiveness of voting methods. *Ann. Stat.*, 26(5):1651–1686, 1998.
- [14] Robert E. Schapire, Yoav Freund, Peter Bartlett, and Wee Sun Lee. Boosting the margin: A new explanation for the effectiveness of voting methods. In *Proceedings of the* Fourteenth International Conference on Machine Learning, 1997.
- [15] H. Schneiderman and T. Kanade. A statistical method for 3D object detection applied to faces and cars. In *International Conference on Computer Vision*, 2000.

- [16] K. Sung and T. Poggio. Example-based learning for view-based face detection. In *IEEE Patt. Anal. Mach. Intell.*, volume 20, pages 39–51, 1998.
- [17] J.K. Tsotsos, S.M. Culhane, W.Y.K. Wai, Y.H. Lai, N. Davis, and F. Nuflo. Modeling visual-attention via selective tuning. *Artificial Intelligence Journal*, 78(1-2):507–545, October 1995.
- [18] Andrew Webb. *Statistical Pattern Recognition*. Oxford University Press, New York, 1999.





INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 11 Issue: III Month of publication: March 2023

DOI: https://doi.org/10.22214/ijraset.2023.49469

www.ijraset.com

Call: © 08813907089 E-mail ID: ijraset@gmail.com



ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538

Volume 11 Issue III Mar 2023- Available at www.ijraset.com

Driver Drowsiness Detection Using Face Recognition

Peddagoni Sai Pavan Goud¹, Nenavath Aravind²

Students of Embedded Systems, Department of Electronics and Communication Engineering, Jawaharlal Nehru Technological University, Hyderabad

Abstract: Every year, hundreds of people die in traffic accidents all over the world. According to national statistics, human factors play a determining role in 90-95% of car accidents in Iran. Globally, 25% of accidents are caused by driver fatigue and around 60% of road accidents result in death or serious injury. In a National Transportation Research Institute (NTSRB) study of 107 randomly selected car crashes, fatigue accounted for 58% of all crashes. Drowsy driving is a major factor in serious road accidents that claim thousands of lives every year. The application of intelligent systems in automobiles has developed considerably in recent years. These systems use wireless sensor networks to monitor and transmit car and driver status. Smart cars that use software technology to control engine speed, steering, transmission, braking, etc. Management and control, the quality of management has been greatly improved. Ad hoc networks are the first systems to develop automatic navigation in cars. A notable weakness of these systems is that their response to changes in the environment is not in real time. This is especially important in driving, where time is a key factor in a driver's decision. On the other hand, another way to check driver fatigue is to monitor the physical condition and facial expression of the driver, which cannot be processed and transmitted accurately enough by wireless sensor networks. Driver fatigue is a major factor in a large number of road accidents. Recent statistics estimate that 1,200 deaths and 76,000 injuries are attributable to fatigue-related accidents each year. Keywords: HOG, EAR, MAR, DROWSINESS.

I. INTRODUCTION

Drowsy driving is a leading cause of 4,444 road deaths. Truckers who drive for long periods of time (especially at night), bus drivers on long trips, or night buses are more likely to have this problem. Drowsy drivers are a nightmare for passengers in every country. Every year, many people are injured or killed in fatigue-related traffic accidents. Therefore, driver fatigue detection and indication is an active research area due to its wide practical applicability. A basic drowsiness detection system consists of three modules/modules: an acquisition system, a processing system, and an early warning system. Here, video from the driver's face is captured in the acquisition system and transmitted to the processing block, where it is processed online to detect drowsiness. The warning system sends a warning or alert to the driver if drowsiness is detected. In general, drowsy driving detection methods fall into three categories: vehicle-based, behavior-based, and physiology-based. In the vehicle-based approach, various parameters such as steering wheel movement, acceleration or braking pattern, vehicle speed, lateral acceleration, deviation from lane position, etc. are monitored constantly. Any abnormal changes detected in these values are considered driver drowsiness. This is a non-intrusive measurement because the sensor is not attached to the conductor. In behavior-based methods [1-7], the visual behavior of the driver is, blink, close your eyes, yawn, lower your head, etc. Analysis to detect drowsiness. It is also a non-intrusive measurement as simple cameras are used to detect these features. In physiological methods [8,9], physiological signals such as electrocardiogram (ECG), electrooculogram (EOG), electroencephalogram (EEG), heart rate, pulse, etc. The level of drowsiness or fatigue is monitored and detected from these measurements. This is an intrusive measure because the sensor is attached to the driver, distracting the driver. Depending on the sensors used in the system, the cost and size of the system increases. However, including more parameters/features increases the accuracy of the system somewhat. These factors motivated us to develop a real-time, lowcost driver drowsiness detection system with acceptable accuracy. Therefore, we propose a webcam-based system to detect driver fatigue from facial images only using image processing and machine learning techniques, which makes the system cheap and portable.

II. METHODOLOGY

Originally, the video was recorded with a webcam. Cameras will be placed in front of the driver to capture perspective. Extract frames from video to get 2D images. Detect faces in an image using a directed gradient histogram (HOG). After detecting a face, facial features such as eyes, nose and mouth are marked on the image [11]. Quantify from facial features, eye aspect ratio, mouth opening rate and head position, and use these features and machine learning methods to judge driver drowsiness. If drowsiness is detected, an alert is sent to the driver to remind him.

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538

Volume 11 Issue III Mar 2023- Available at www.ijraset.com

A. Data Acquisition

video was recorded with a webcam (Sony CMU-BR300) and images were extracted and processed on a laptop computer. Once the frames are extracted, image processing techniques are applied to these 2D images. Currently, synthetic player data has been generated. The volunteers were asked to watch a webcam while intermittently blinking, closing their eyes, yawning and tilting their heads. The video was shot for 30 minutes.

B. Face Detection

After extracting the image, first detect the face. There are many face detection algorithms on the internet, and this time I am learning Histogram of Oriented Gradients (HOG). This method takes fixed window size positive samples from images and computes HOG descriptors on them. Then the negative sample (the sample that does not contain the object you want to detect, i.e. e) takes a face of the same size and calculates the HOG description. Usually the number of negative samples is much larger than the number of positive samples. After obtaining the features of the two classes, train a linear SVM for the classification task.

C. Working

This project revolves deeply around the prediction of visual cues for a given face. We can accomplish a lot with these metrics. From detecting eye blinks in videos [3] to predicting a subject's emotion. The applications, consequences and possibilities of visual cues are vast and interesting. Dlib's pre-built model, which is basically an implementation of [4], not only allows fast face detection, but also allows us to accurately predict 68 2D face landmarks.




Source: C. Sagonas, G. Tzimiropoulos, S. Zafeiriou, M. Pantic. 300 Faces in-the-Wild Challenge: The first facial landmark localization Challenge Proceedings of IEEE Int. | Conf. on Computer Vision (ICCV-W, 300 Faces in-the-Wild Challenge (300-W), Sydney, Australia, December 2014.

Figure: Face detection coordinates

Using these predicted facial features, we can create suitable features that additionally allow us to detect certain actions, such as detecting eye blinks using eye aspect ratio (more on that below) or Blink detection using mouth aspect ratio - same as yawning etc. can even detect beaks. In this project, these movements were programmed as triggers to control drowsiness. The PyAutoGUI library is used to move the cursor. Eye Aspect Ratio (EAR)

You will see that the eye aspect ratio [1] is the easiest and most elegant function to get the most out of facial features. Ears help us blink [3] and wink, etc.

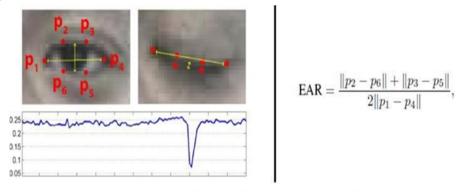

Source: Tereza Soukupova´ and Jan C´ ech. Real-Time Eye Blink Detection using Facial Landmarks at https://vision.fe.uni-ij.si/cvvw/2016/proceedings/papers/05.pdf

Figure: Facial Landmarks



International Journal for Research in Applied Science & Engineering Technology (IJRASET)

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538

Volume 11 Issue III Mar 2023- Available at www.ijraset.com

You can see the EAR value dropping when you close your eyes. We can train a simple classifier to detect drops. However, the normal state works fine. Sometimes as follows:

If EAR<=SOME_THRESHOLD: EYE_STATUS = 'CLOSE'

D. Mouth Aspect Ratio (MAR)

Highly inspired by the EAR feature, I tweaked the formula a little bit to get a metric that can detect opened/closed mouths. Unoriginal but it works.

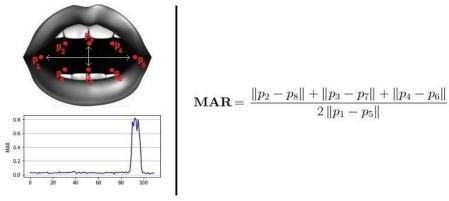


Figure: Mouth detection landmarks

Similar to EAR, MAR values increase when the mouth is opened. A similar intuition applies to this measure.

E. Classification

After calculating the three features, the next task is to detect drowsiness in the extracted images. To get started, consider adaptive classification thresholds. Later, machine learning algorithms were used to classify the data. Threshold calculations for each function assume that the driver is initially fully awake.

This is called the setup phase. The records the EAR value for the first three hundred frames of the setup phase (10 seconds at 30 fps). Of these three hundred initial images containing faces, an average of 150 maxima is taken as the hard threshold for EAR. Higher values are taken into account so that blinding does not occur.

If the test value is below this threshold, closed eyes are detected (i.e. , drowsy). Since eye size varies from person to person, each person's initial settings will reduce this effect. Similarly, for the calculation of the MOR threshold, the mouth which cannot open to the maximum in the initial frame (localization stage), this threshold is obtained experimentally from observations. If the test value is above this threshold, a yawn is detected (i.e., asleep).

After calculating threshold, the system is used for testing. The system detects drowsiness if drowsiness is detected for at least one feature in the test frame.


To make this threshold more realistic, each frame decision is based on the last 75 frames. Gives a drowsiness detection indication and a warning if at least 70 images (out of 75 images) meet the drowsiness criteria for at least one attribute. To make this threshold adaptive, another single threshold is initially calculated from the EAR threshold.

The average of the EAR values is calculated as the average of the 150 largest values over 300 frames during the configuration phase. The offset is then determined heuristically and subtracted from the mean to obtain the threshold.

When the EAR falls below this threshold, driver safety is compromised. This EAR threshold increases slightly with each yawn until a certain limit is reached. Because each yaw and head tilt is spread across multiple frames, the yaw and head tilt of consecutive frames are treated as a single yaw and added once to the adaptive threshold. As part of the test, if the EAR value falls below this adaptive threshold, drowsiness is detected and the driver is alerted. uses a machine learning algorithm in addition to thresholding to detect drowsiness.

EAR and MOR values are stored with actual sleepiness records from synthetic test data. Prior to classification, a statistical analysis is performed on the features. Initially, the characteristic space is transformed into an independent space. After transforming the feature values, use a Student's t-test to test whether the features are statistically significant for both classes. Since all three features were statistically significant at the 5% significance level, all three features were used for classification using a support vector machine [12].

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 11 Issue III Mar 2023- Available at www.ijraset.com

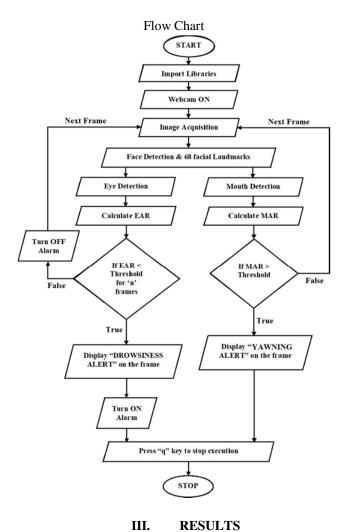


EAR: 0.34 MAR: 0.37

Figure: result showing driver is not drowsy



Figure: result showing drowsiness alert





ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538

Volume 11 Issue III Mar 2023- Available at www.ijraset.com



Figure: result showing yawning count of driver

IV. TABULAR RESULTS

Description	Values
Image dimensions	500*400 Pixels
Total number of	0 - 255
frames	
Number of Frames	48
considered for	
analyzing Alert	
Threshold values of	EAR= 0.25
EAR &	MAR = 0.75
MAR	
Driver is not drowsy	EAR>=0.25 & MAR <
	0.75
Driver is drowsy and	EAR <0.25 & MAR >
drowsiness	0.75
alert	
Yawn count initially	Yawn count = 0
Yawn count after driver	Yawn count > 0
Yawning	

V. CONCLUSION

After reviewing the results, we can conclude that we offer a low-cost, real-

time driver drowsiness monitoring system based on visual behavior and machine learning. Here, visual behavioral characteristics su ch as eye aspect ratio and mouth aspect ratio are calculated from streaming video captured by a webcam. An adaptive threshold tech nique is developed to detect driver drowsiness in real time. The developed system can accurately process the generated synthetic dat a. Then store the feature values and use SVM for classification.

REFERENCES

- [1] W. L. Ou, M. H. Shih, C. W. Chang, X. H. Yu, C. P. Fan, "Intelligent Video-Based Drowsy Driver Detection System under Various Illuminations and Embedded Software Implementation", 2015 international Conf. on Consumer Electronics Taiwan, 2015
- [2] W. B. Horng, C. Y. Chen, Y. Chang, C. H. Fan, "Driver Fatigue Detection based on Eye Tracking and Dynamic Template Matching", IEEE International Conference on Networking, Sensing, and Control, Taipei, Taiwan, March 21-23, 2004.
- [3] S. Singh, N. P. papanikolopoulos, "Monitoring Driver Fatigue using Facial Analysis Techniques", IEEE Conference on Intelligent Transportation System, pp 314-318.
- [4] B. Alshaqaqi, A. S. Baquhaizel, M. E. A. Ouis, M. Bouumehed, A. Ouamri, M. Keche, "Driver Drowsiness Detection System", IEEE International Workshop on Systems, Signal Processing and their Applications, 2013.
- [5] M. Karchani, A. Mazloumi, G. N. Saraji, A. Nahvi, K. S. Haghighi, B. M. Abadi, A. R. Foroshani, A. Niknezhad, "The Steps of Proposed Drowsiness Detection System Design based on Image Processing in Simulator Driving", International Research Journal of Applied and Basic Sciences, vol. 9(6), pp 878-887, 2015.
- [6] R. Ahmad, and J. N. Borole, "Drowsy Driver Identification Using Eye Blink Detection," IJISET International Journal of Computer Science and Information Technologies, vol. 6, no. 1, pp. 270-274, Jan. 2015.



International Journal for Research in Applied Science & Engineering Technology (IJRASET)

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 11 Issue III Mar 2023- Available at www.ijraset.com

- [7] A. Abas, J. Mellor, and X. Chen, "Non-intrusive drowsiness detection by employing Support Vector Machine," 2014 20th International Conference on Automation and Computing (ICAC), Bedfordshire, UK, 2014, pp. 188-193.
- [8] A. Sengupta, A. Dasgupta, A. Chaudhuri, A. George, A. Routray, R. Guha; "A Multimodal System for Assessing Alertness Levels Due to Cognitive Loading", IEEE Trans. on Neural Systems and Rehabilitation Engg., vol. 25 (7), pp 1037-1046, 2017.
- [9] K. T. Chui, K. F. Tsang, H. R. Chi, B. W. K. Ling, and C. K. Wu, "An accurate ECG based transportation safety drowsiness detection scheme," 343IEEE Transactions on Industrial Informatics, vol. 12, no. 4, pp. 1438-1452, Aug. 2016.
- [10] N. Dalal and B. Triggs, "Histograms of Oriented Gradients for Human Detection", IEEE conf. on CVPR, 2005.
- [11] V. Kazemi and J. Sullivan; "One-millisecond face alignment with an ensemble of regression trees", IEEE Conf. on Computer Vision and Pattern Recognition, 23-28 June 2014, Columbus, OH, USA.
- [12] Richard O. Duda, Peter E. Hart, David G. Stork, "Pattern Classification", Wiley student edition.





10.22214/IJRASET



45.98



IMPACT FACTOR: 7.129



IMPACT FACTOR: 7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call: 08813907089 🕓 (24*7 Support on Whatsapp)