Estimated on-chip power

Vivado 2024.2 | xc7a35tcsg324-1 | 50 MHz assumed | 25 °C junction

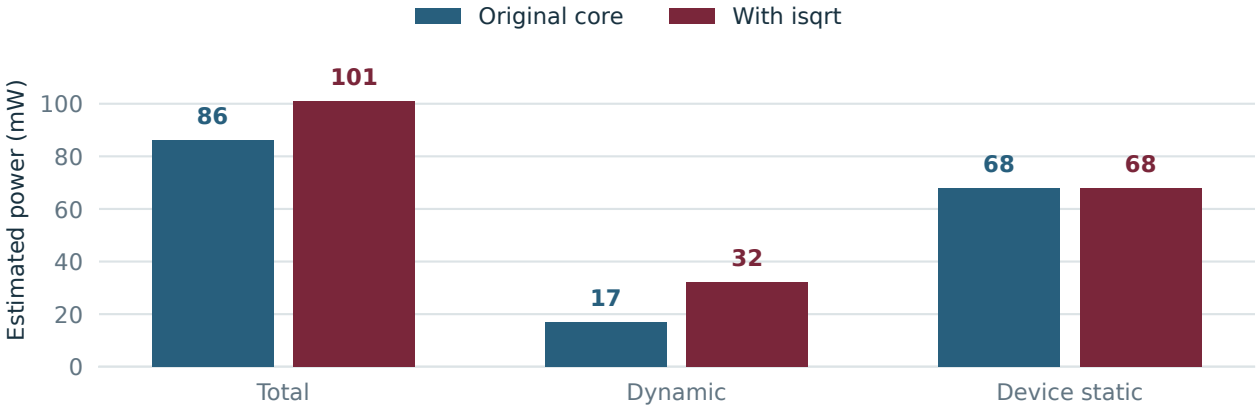

Vectorless estimates with Medium confidence. Values round independently to 1 mW.

Both routed designs miss timing at the assumed clock frequency.