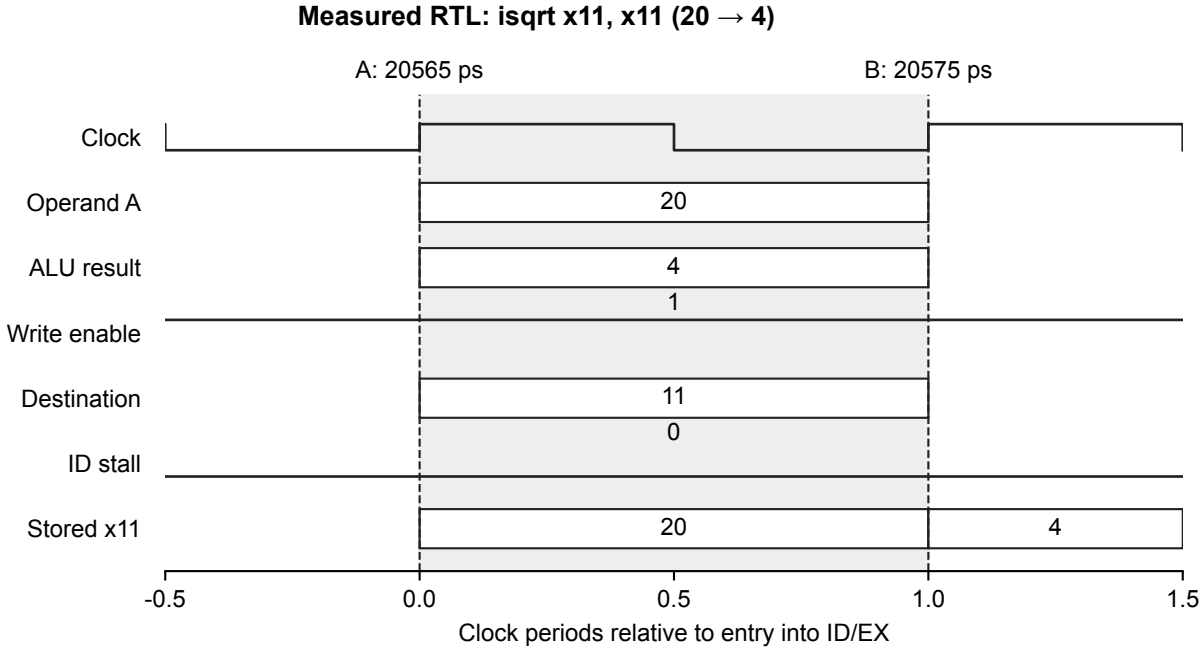
Measured RTL: isqrt x11, x11 (20 → 4)
A: 20565 ps
B: 20575 ps
Clock
Operand A
20
ALU result
4
1
Write enable
Destination
11
0
ID stall
Stored x11
20
4
-0.5
0.0
0.5
1.0
1.5
Clock periods relative to entry into ID/EX