

Analytical Method

Task	Periodicity	Execution Time (msec)	Hyperperiod
Button_1_monitor	50	0.024	2
Button_2_monitor	50	0.024	2
Periodic_Transmitter	100	0.09	1
Uart_Reciever	20	0.025	5
Load_1_Simulation	10	5	10
Load_2_Simulation	100	12	1

1. System Hyper period Hyperperiod = 100ms

2. CPU Load

Utilization = Total Execution Time over Hyperperiod/Hyperperiod

3. System schedulability

3.1. Rate Monotonic

$$U \leq n \; (2^{1/n} - 1)$$

$$UU_{rm} = 6 (2^{1/6} - 1) = 0.734$$

3.2. Time Demand Analysis

$$w(t) = e_i - \sum_{k=1}^{i-1} \frac{t}{p_k} * e_k$$

1.
$$w1 (10) = 5ms + 0 = 5$$

 $w(10) = 5 < 10$

2.
$$w2 (20) = 27us + (20/10) 5m = 10.027 ms$$

 $w(20) = 10.027 < 20$

3.
$$w3 (50) = 24us + (50/10) 5ms + (50/20) 27us = 25.0915 ms$$

 $w(50) = 25.0915 < 50$

4.
$$w$$
 4 (50) = 24us + (50/10) 5 m s + (50/20) 27us + (50/50)27us = 25. 1185 m s w (50) = 25. 1185 < 50

5.
$$w5 (100) = 90us + (100/10) 5ms + (100/20) 27us + (100/50)24us + (100/50)24us = 50.465ms$$


 $w(100) = 50.465 < 100$

6.
$$w6 (100) = 12ms + (100/10)5ms + (100/20)27us + (100/50)24us + (100/50)24us + (100/100)90us = 62.321$$

 $w(100) = 62.321 < 100$

All Tasks are schedulable

Simso Simulator

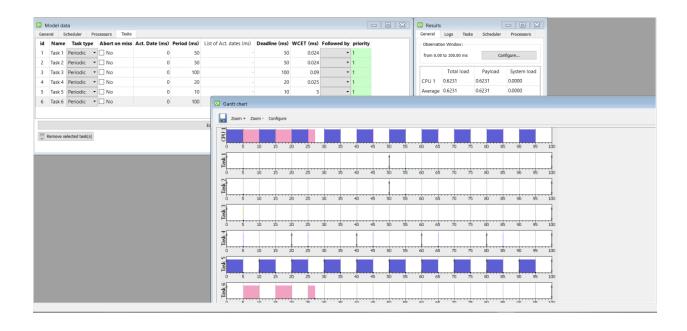

Keil Simulator

Logic Analyzer



Figure 1:snapshot of the output

Video

https://youtu.be/TdUh2guBPOo

Runtime:

https://youtu.be/4TBY5xv0QRU