

DÄR TOLERANS EJ UTSATTS GÄLLER:
WHERE TOLERANCE NOT MENTIONED:

TOLERANSSYSTEM ENLIGT ISO
TOLERANCE SYSTEM ACC TO ISO

REVISION

SMS 715 FÖR BEARBETNING
SMS 715 FOR MACHINE


MEDEL ☐ GROV ☐ MYCKET GROV ☐
MEDIUM ☐ ROUGH ☐ VERY ROUGH ☐

YTJÄMNHET $R_a \mu m$
SURFACE
ROUGHNESS $R_a \mu m$
EUROP. PROJECTION


SMS 723 FÖR SVETSNING:
SMS 723 FOR WELDED CONSTRUCTIONS:

A ☐ B ☐ C ☐ D ☐ DÄR EJ ANNAT ANGES
IF NOTHING ELSE IS STATED

NO.	DESCRIPTION	DATE	SIGN.
A	COMPL. OF INFORMATION	960709	TÖG

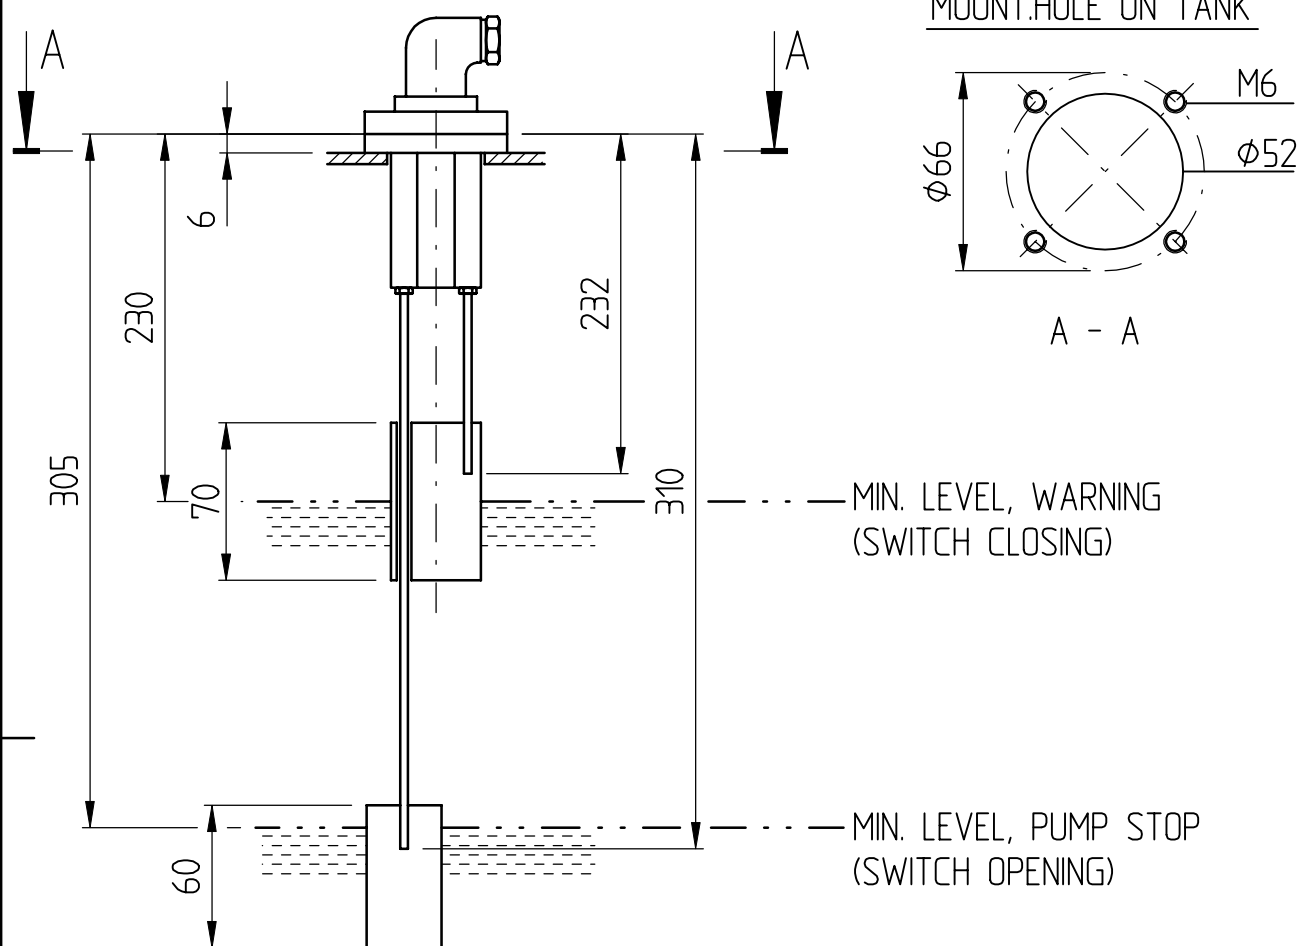

HOW TO CONNECT



1. Common
2. Lower level
3. Upper level

*) H.N. Drivelement AB
RL-G2 Flange S1a - S1a L=500 mm
+ adapter plate to Craford connection
incl. gasket

SWITCH SPECIFICATIONS

Open or closed contacts switch

-3 A. 60W. 60V.A. 250V (standard)

505 874			LEVEL SWITCH	*)	
ITEM NO/DOC NO	POS NO	QUANT	DESCRIPTION	DESIGNATION/DIMENSION/MATERIAL/DRAWING	NET WEIGHT TOT. APT. KG
NIVÅGIVARE				LEVEL SWITCH	
SUND//BIRSTA			FILE NAME	DRAWN DATE	SHEET 1 OF 1
			50006148	GN 951220	REV A
			REFERENCE DWG	CHECKED DATE	
			SCALE 1:1	APPROVED DATE	
				TÖG 951221	
				TÖG 951221	
			4-662 9002		