

BRAC University




Inspiring Excellence

Name: Shuvojit Paul
Name: Radwan Ahamed Opy

ID:21301746
ID:21301604

Group id: 309
Topic 1 -> Brac University Under Attack

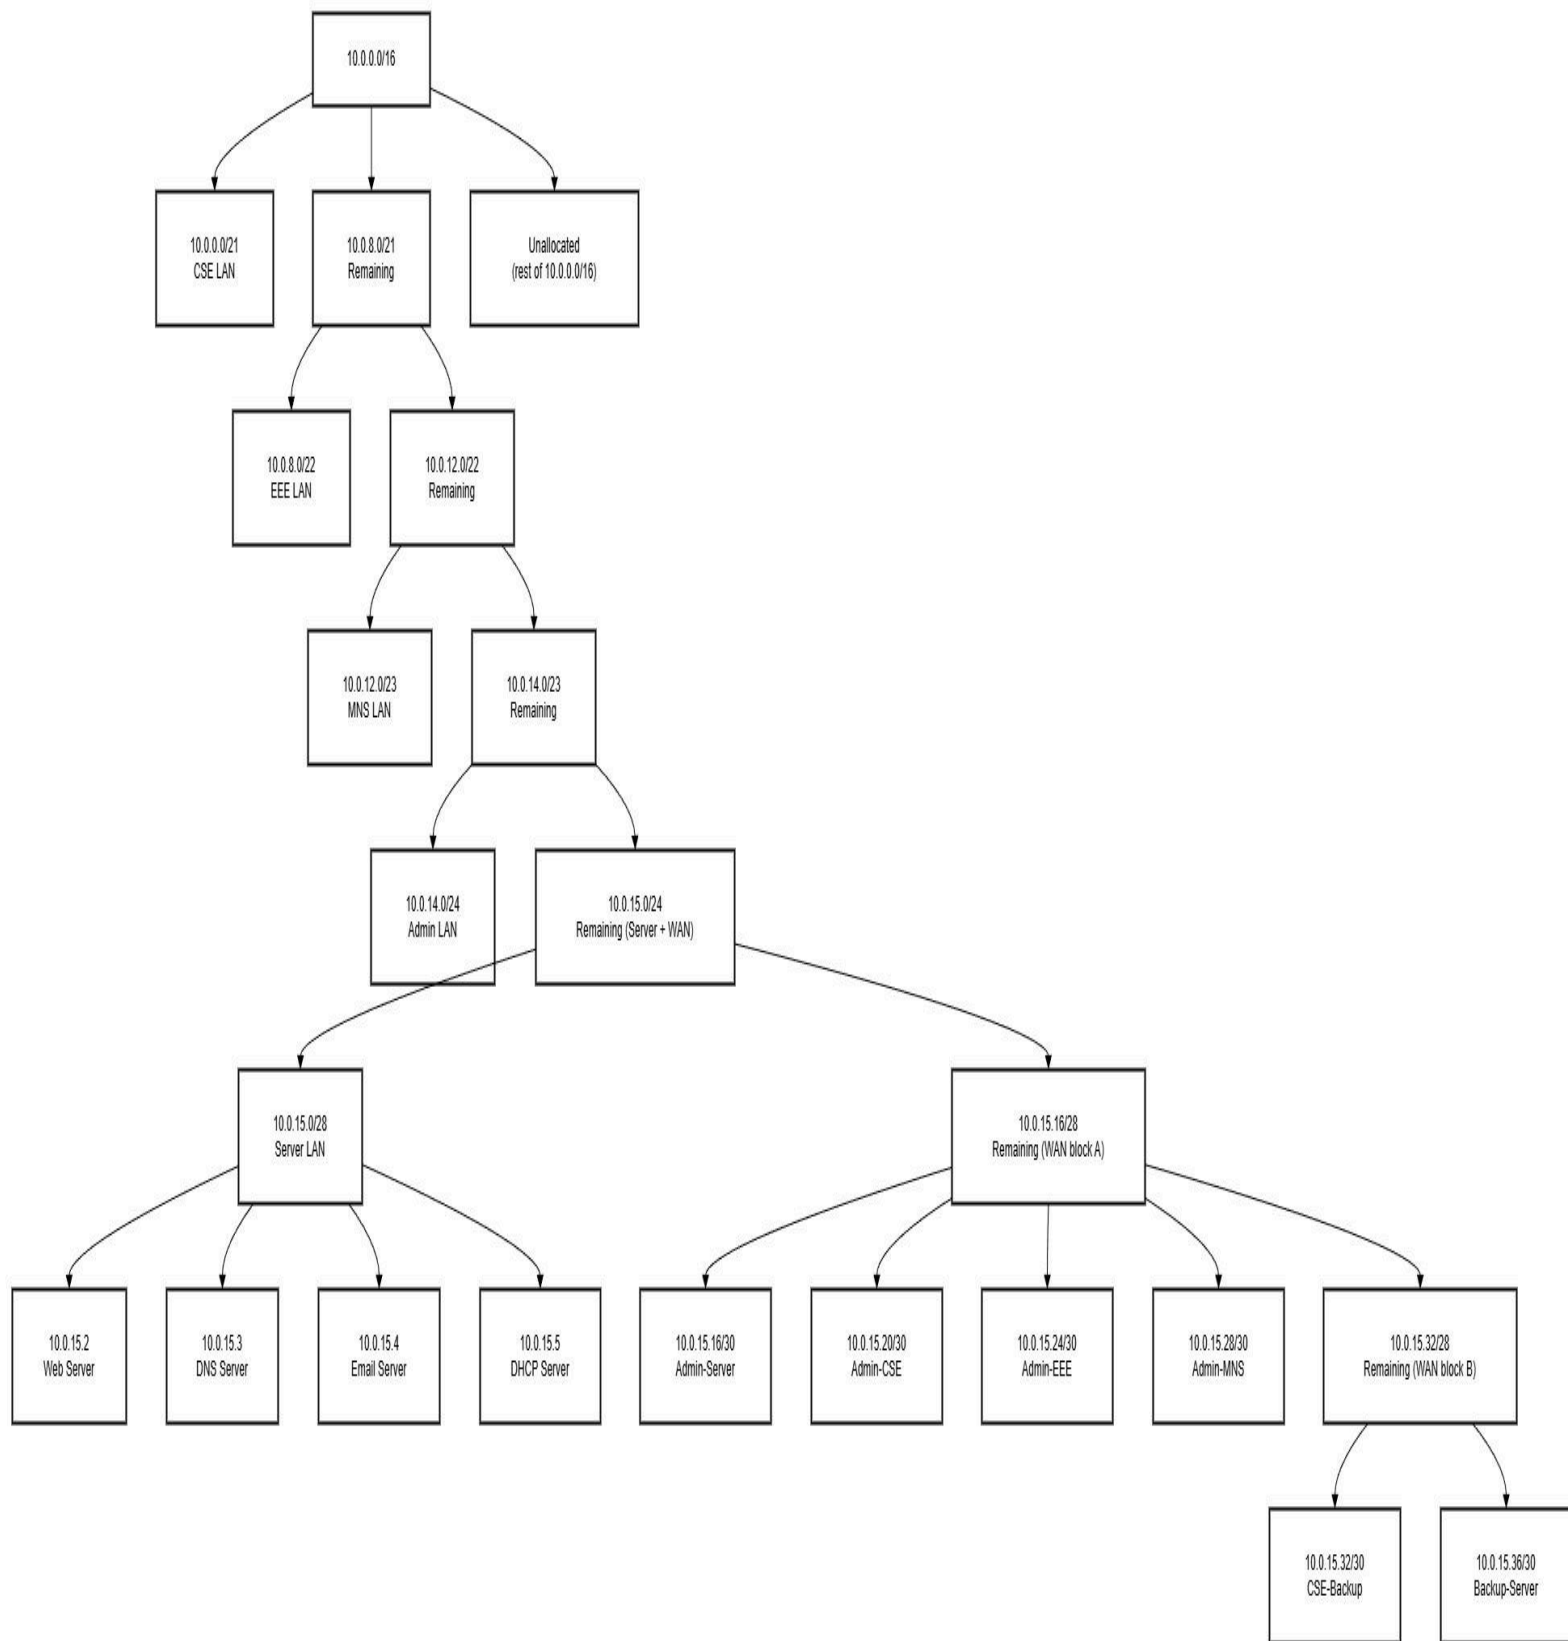

Router Commands

CSE ROUTER

```
enable
conf t
int gig0/0
ip address 10.0.0.1 255.255.248.0
exit
int s0/0/0
ip address 10.0.15.18 255.255.255.252
exit
int s0/0/1
ip address 10.0.15.29 255.255.255.252
no shut
exit
end
copy run start
```

CSE DHCP RELAY

```
enable
conf t
interface gigabitEthernet0/0
ip helper-address 10.0.15.5
exit
end
copy run start
```

CSE RIP

```
enable
conf t
router rip
version 2
no auto-summary
network 10.0.0.0
network 10.0.14.0
passive-interface gigabitEthernet0/0
end
copy run start
```

CSE Server LAN FAILOVER

```
enable
conf t
ip route 10.0.15.0 255.255.255.248 10.0.15.17 (PRIMARY)
```

```
ip route 10.0.15.0 255.255.255.248 10.0.15.30 200 (BACKUP)
end
copy run start
```

EEE Router

```
enable
conf t
int gig0/0
ip address 10.0.8.1 255.255.252.0
exit
int s0/0/0
ip address 10.0.15.22 255.255.255.252
no shut
exit
end
copy run start
```

EEE DHCP RELAY

```
enable
conf t
interface gigabitEthernet0/0
ip helper-address 10.0.15.5
exit
end
copy run start
```

EEE RIP

```
enable
conf t
router rip
version 2
no auto-summary
network 10.0.8.0
network 10.0.14.0
passive-interface gigabitEthernet0/0
end
copy run start
```

MNS ROUTER

```
enable
conf t
int gig0/0
```

```
ip address 10.0.12.1 255.255.254.0
exit
int s0/0/0
ip address 10.0.15.26 255.255.255.252
no shut
exit
end
copy run start
```

MNS DHCP RELAY

```
enable
conf t
interface gigabitEthernet0/0
ip helper-address 10.0.15.5
exit
end
copy run start
```

MNS RIP

```
enable
conf t
router rip
version 2
no auto-summary
network 10.0.12.0
network 10.0.14.0
passive-interface gigabitEthernet0/0
end
copy run start
```

ADMIN ROUTER

```
conf t
int g0/0
ip address 10.0.14.1 255.255.255.0
int s0/0/0
ip address 10.0.15.9 255.255.255.252
int s0/1/0
ip address 10.0.15.17 255.255.255.252
int s0/1/1
ip address 10.0.15.25 255.255.255.252
no shut
int s0/0/1
ip address 10.0.15.21 255.255.255.252
```

```
no shut
exit
end
copy run start
```

ADMIN STATIC ROUTE CONFIGURATION

```
enable
conf t
ip route 10.0.15.0 255.255.255.248 10.0.15.10
passive-interface s0/0/0
end
copy run start
```

ADMIN RIP

```
enable
conf t
router rip
version 2
no auto-summary
network 10.0.14.0
network 10.0.8.0
network 10.0.12.0
network 10.0.0.0
passive-interface gigabitEthernet0/0
passive-interface s0/0/0
end
copy run start
```

SERVER ROUTER

```
conf t
int g0/0
ip address 10.0.15.1 255.255.255.248
int s0/0/0
ip address 10.0.15.14 255.255.255.252
int s0/0/1
ip address 10.0.15.10 255.255.255.252
no shutdown
Exit
end
copy run start
```

SERVER STATIC ROUTING CONFIGURATION

```
enable
conf t
ip route 0.0.0.0 0.0.0.0 10.0.15.9
ip route 10.0.0.0 255.255.248.0 10.0.15.13 200
ip route 10.0.15.28 255.255.255.252 10.0.15.13 200
end
copy run start
```

BACKUP ROUTER

```
conf t
int s0/0/1
ip address 10.0.15.30 255.255.255.252
int s0/0/0
ip address 10.0.15.13 255.255.255.252
no shut
exit
end
copy run start
```

BACKUP ROUTER STATIC ROUTING

```
enable
conf t
no router rip
ip route 10.0.15.8 255.255.255.248 10.0.15.14
ip route 10.0.0.0 255.255.248.0 10.0.15.29
end
copy run start
```

IP Address Table

Device	Interface	IPv4 Adresss	Subnet Mask	Default Gateway
Admin	G0/0	10.0.14.1	255.255.255.0	N/A
Admin	S0/0/0	10.0.15.9	255.255.255.252	N/A
Admin	S0/0/1	10.0.15.21	255.255.255.252	N/A
Admin	S0/1/0	10.0.15.17	255.255.255.252	N/A
Admin	S0/1/1	10.0.15.25	255.255.255.252	N/A
CSE	G0/0	10.0.0.1	255.255.248.0	N/A
CSE	S0/0/0	10.0.15.18	255.255.255.252	N/A
CSE	S0/0/1	10.0.15.29	255.255.255.252	N/A
EEE	G0/0	10.0.8.1	255.255.252.0	N/A
EEE	S0/0/0	10.0.15.22	255.255.255.252	N/A
MNS	G0/0	10.0.12.1	255.255.254.0	N/A
MNS	S0/0/0	10.0.15.26	255.255.255.252	N/A
SERVER	G0/0	10.0.15.1	255.255.255.248	N/A
SERVER	S0/0/1	10.0.15.10	255.255.255.252	N/A
SERVER	S0/0/0	10.0.15.14	255.255.255.252	N/A
BACKUP	S0/0/0	10.0.15.13	255.255.255.252	N/A
BACKUP	S0/0/1	10.0.15.30	255.255.255.252	N/A
WEB_SERVER	NIC	10.0.15.2	255.255.255.248	10.0.15.1
DNS_SERVER	NIC	10.0.15.3	255.255.255.248	10.0.15.1
EMAIL_SERVER	NIC	10.0.15.4	255.255.255.248	10.0.15.1
DHCP_SERVER	NIC	10.0.15.5	255.255.255.248	10.0.15.1
CSE_SUPER	NIC	10.0.7.254	255.255.248.0	10.0.0.1
EEE_SUPER	NIC	10.0.11.254	255.255.252.0	10.0.8.1
MNS_SUPER	NIC	10.0.13.254	255.255.254.0	10.0.12.1

ADMIN_SUPER	NIC	10.0.14.254	255.255.255.0	10.0.14.1
SERVER_SUPER	NIC	10.0.15.6	255.255.255.248	10.0.15.1
CSE_PC1	NIC	DHCP	255.255.248.0	10.0.0.1
CSE_PC2	NIC	DHCP	255.255.248.0	10.0.0.1
EEE_PC1	NIC	DHCP	255.255.252.0	10.0.8.1
EEE_PC2	NIC	DHCP	255.255.252.0	10.0.8.1
MNS_PC1	NIC	DHCP	255.255.254.0	10.0.12.1
MNS_PC2	NIC	DHCP	255.255.254.0	10.0.12.1

WAN Network

LINK	Network
Admin - Server	10.0.15.8
Backup - Server	10.0.15.12
Admin - CSE	10.0.15.16
Admin - EEE	10.0.15.20
Admin - MNS	10.0.15.24
CSE - Backup	10.0.15.28

Assumption

1. We assume initial network address as 10.0.0.0/16 for subnetting
2. We used router model 2901