




Beam profile at 3cm without collimator support

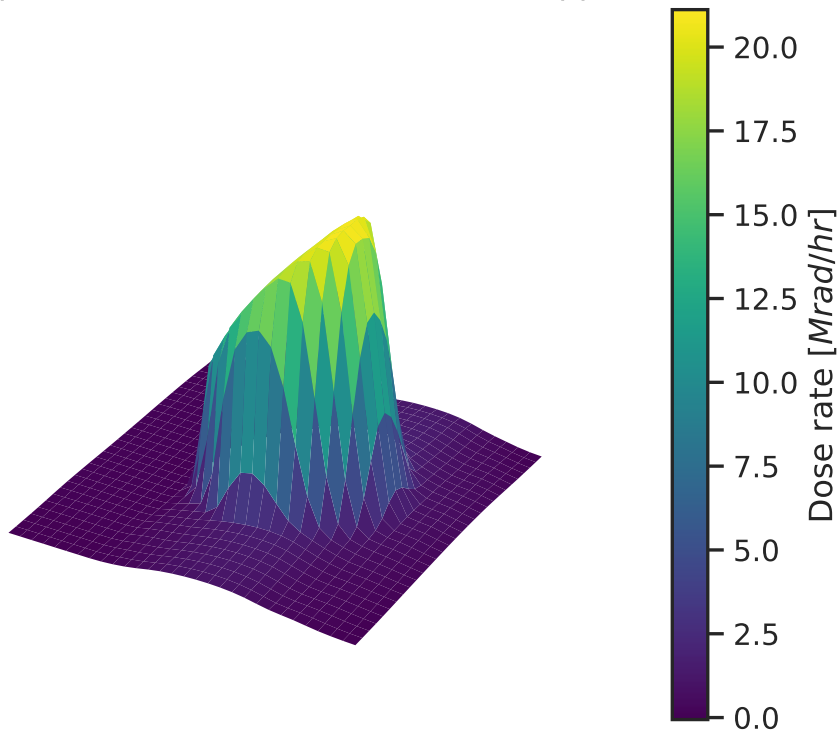


Beam profile at 8cm without collimator support

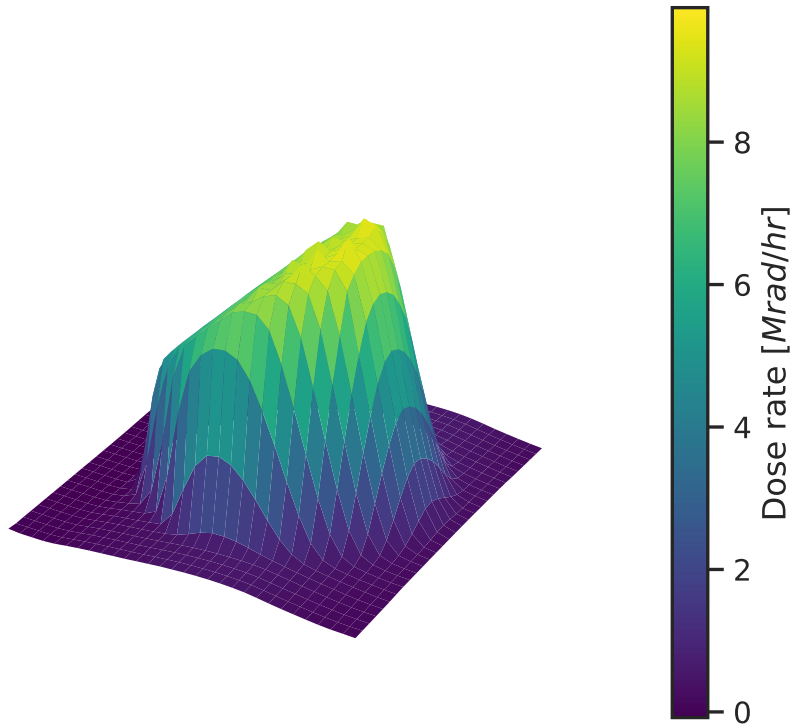


Beam profile at 51cm without collimator support

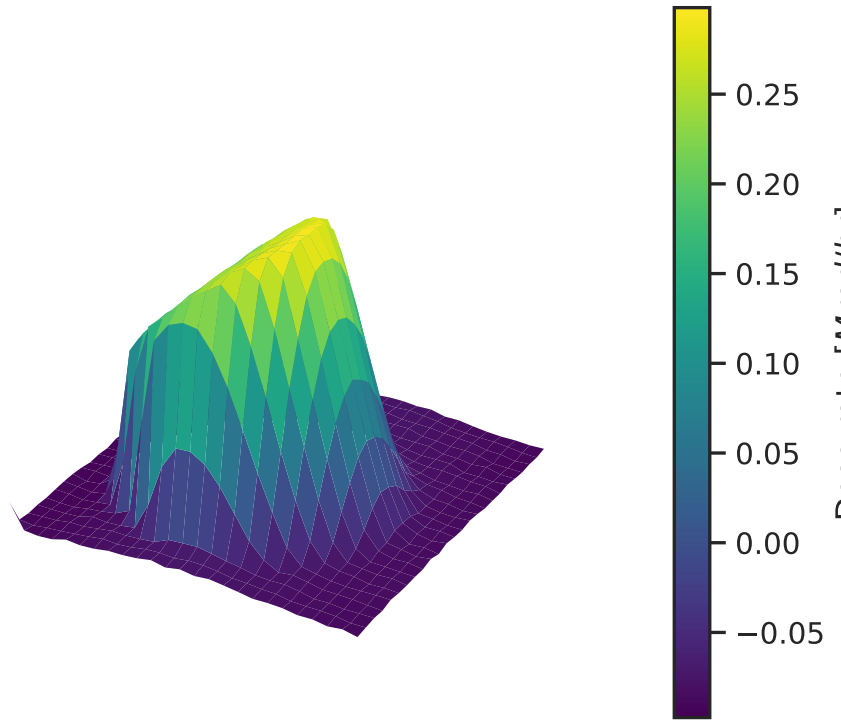


Beam profile at 60cm without collimator support

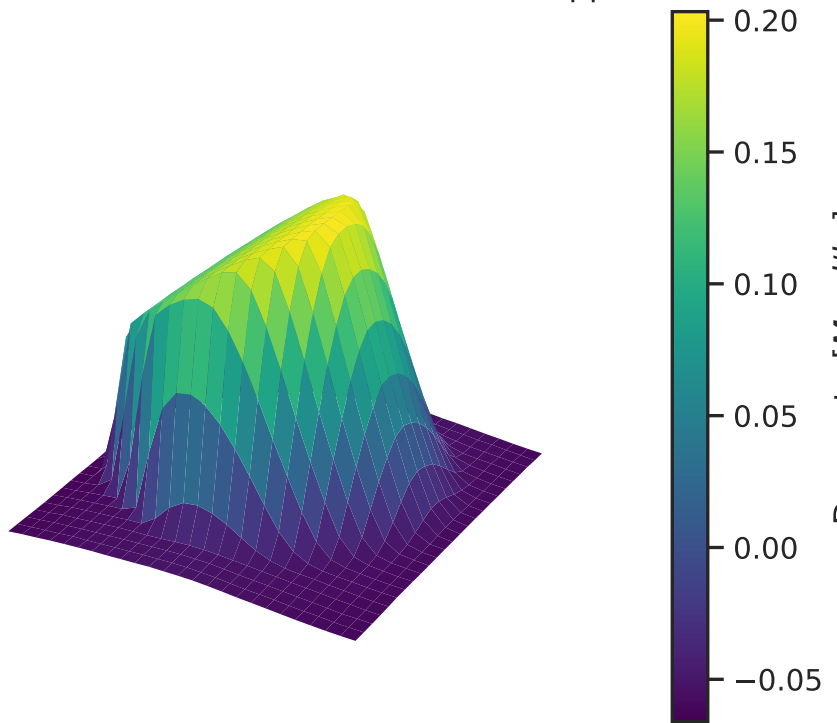


er (40 kV and 50mA)

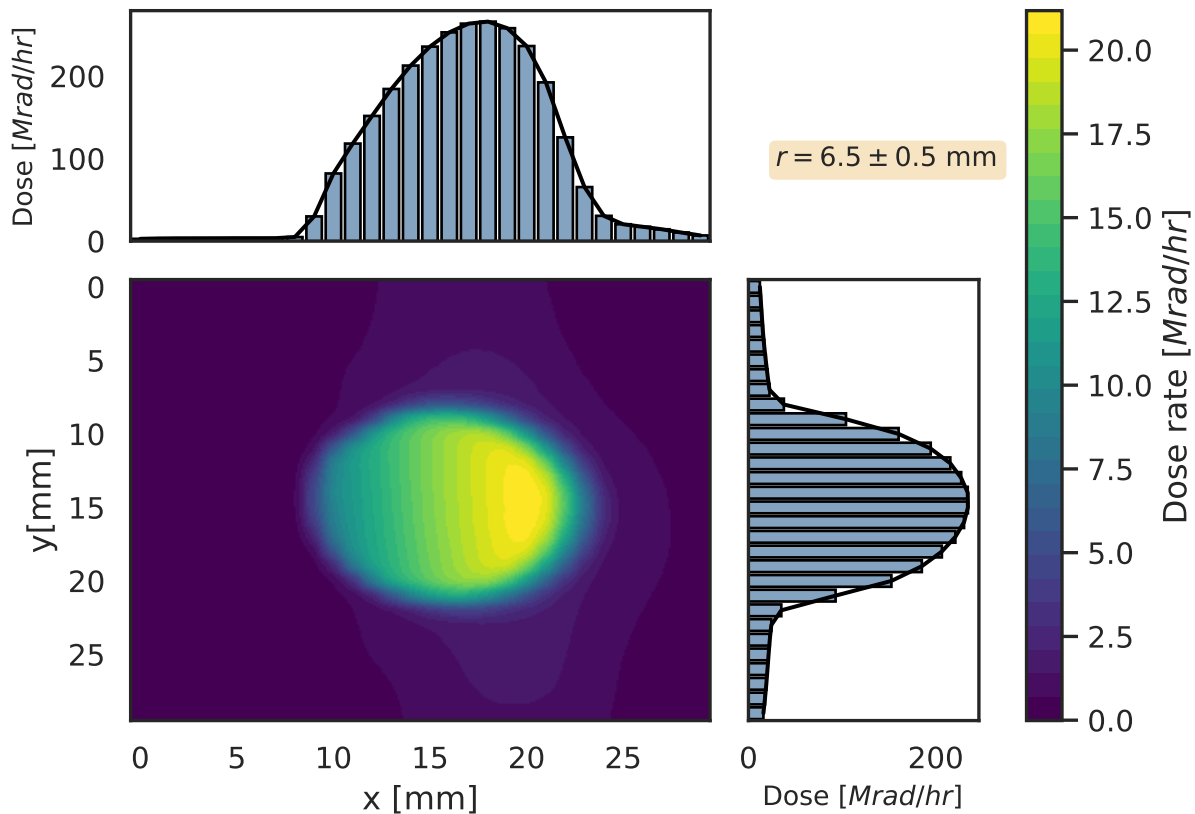


Beam profile at 3cm from the collimator holder (40 kV and 50mA)

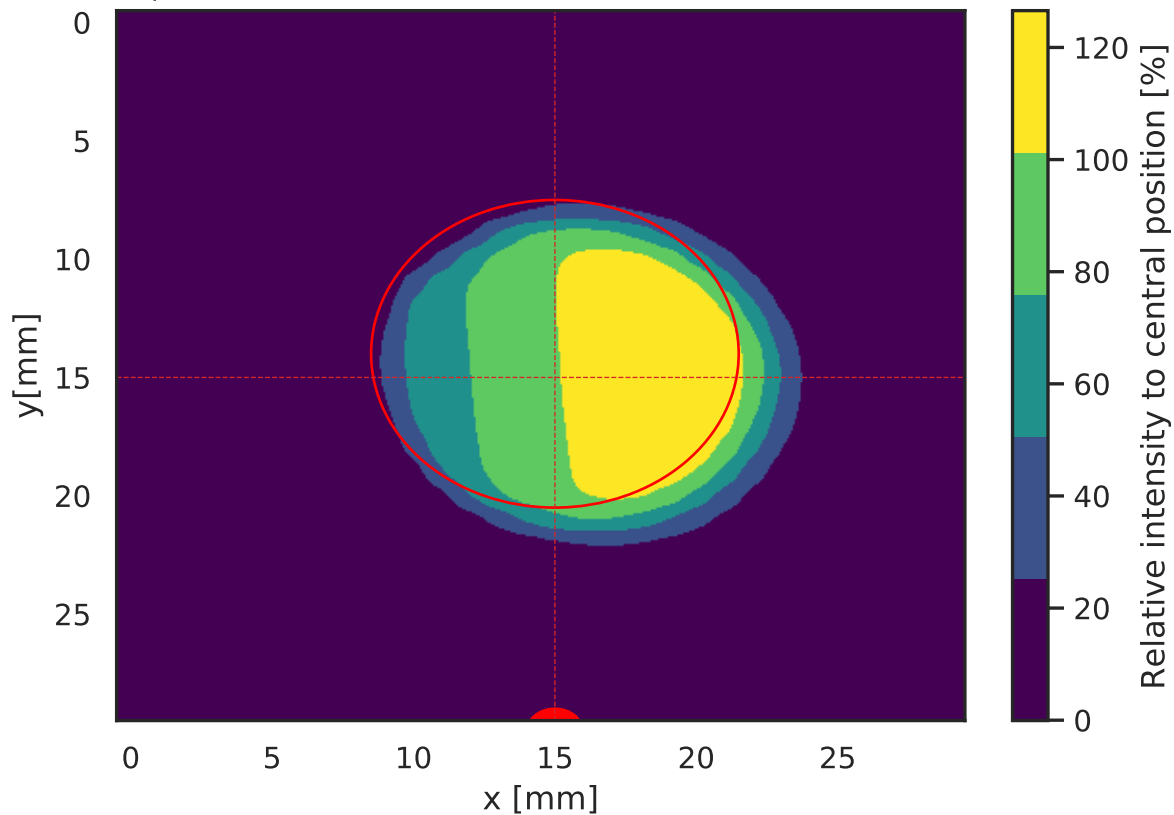

er (40 kV and 50mA)

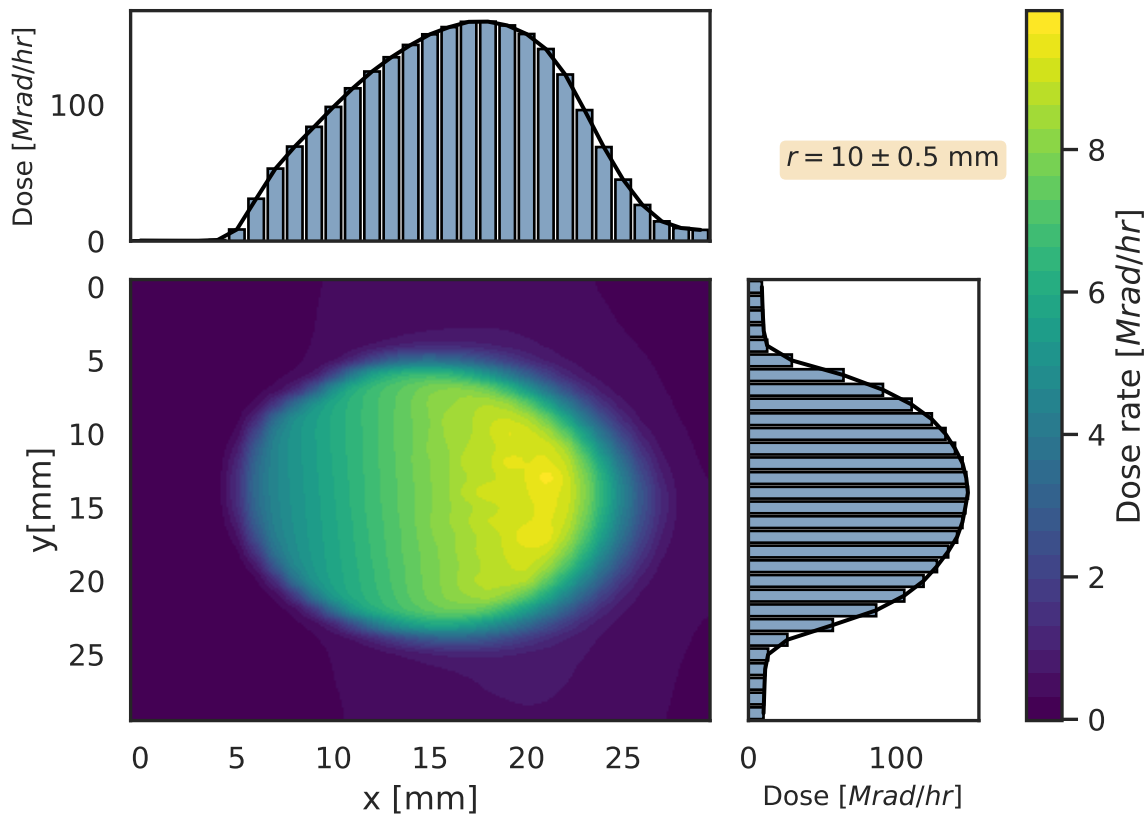


Beam profile at 8cm from the collimator holder (40 kV and 50mA)

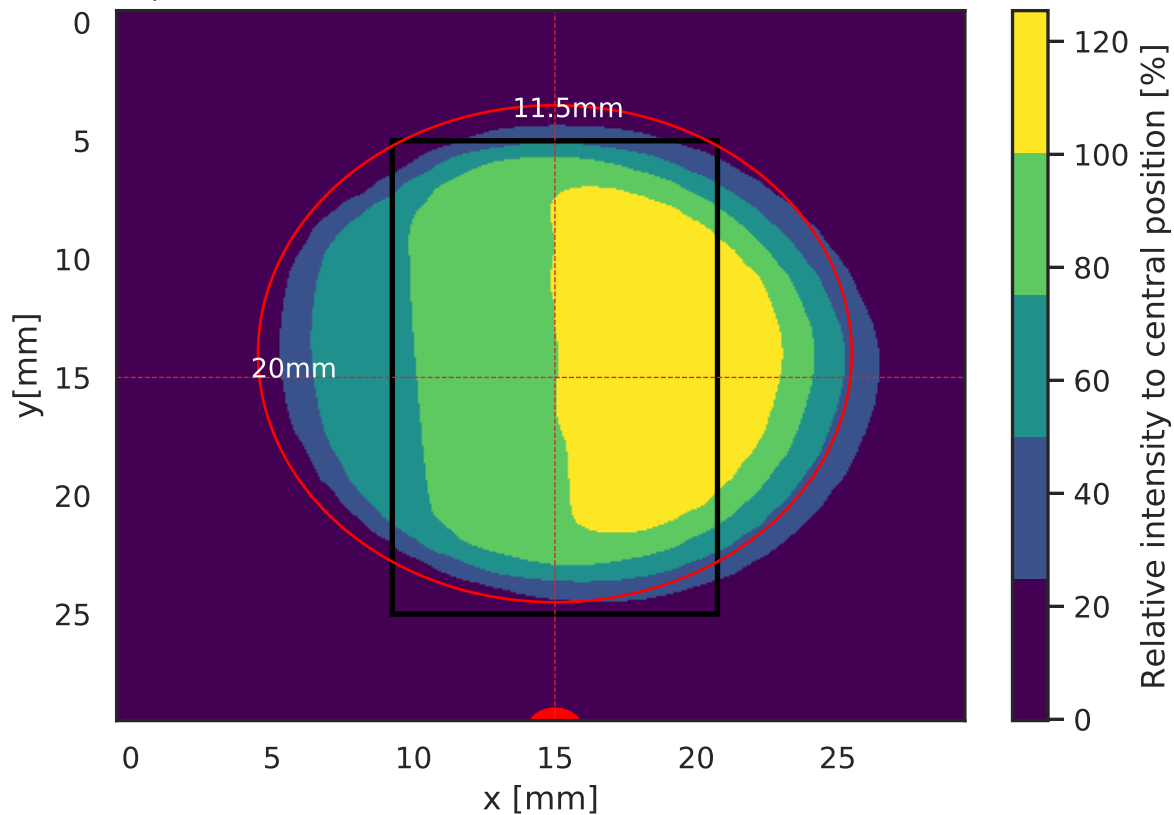





der (40 kV and 50mA)

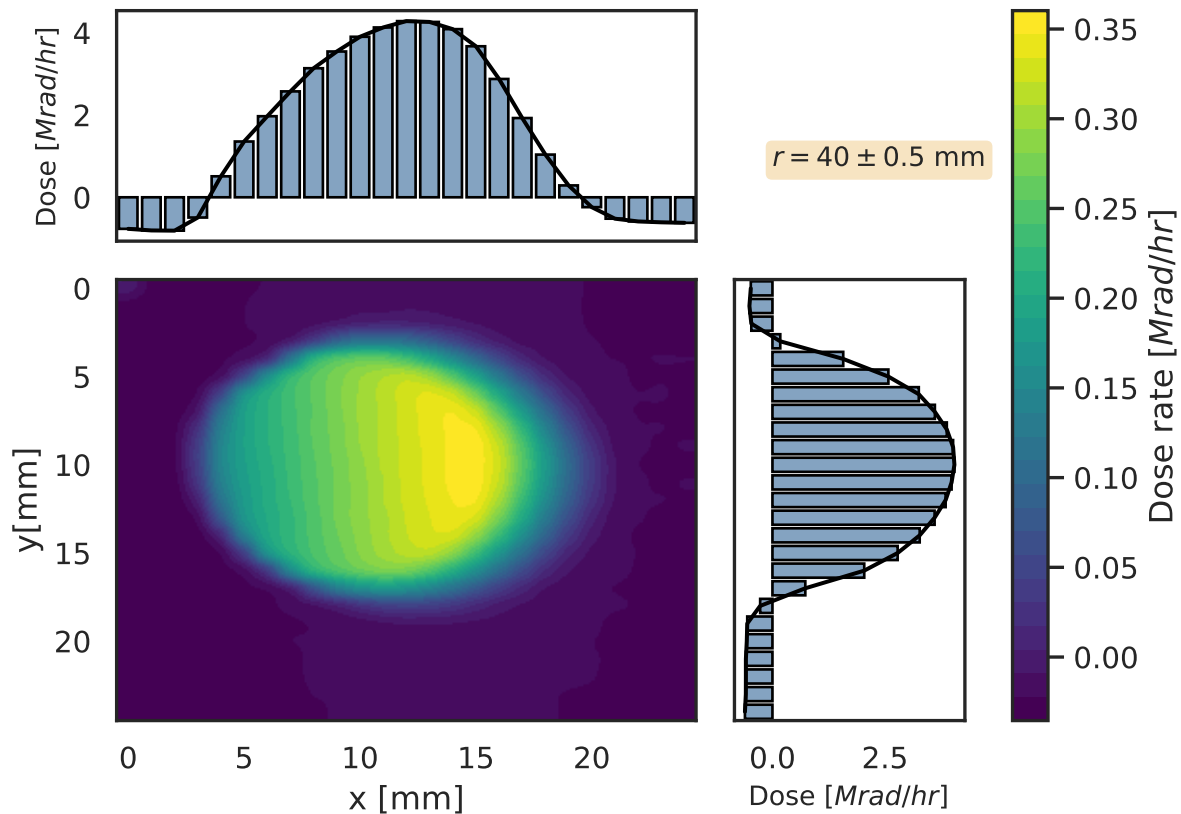


Beam profile at 51cm from the collimator holder (40 kV and 50mA)

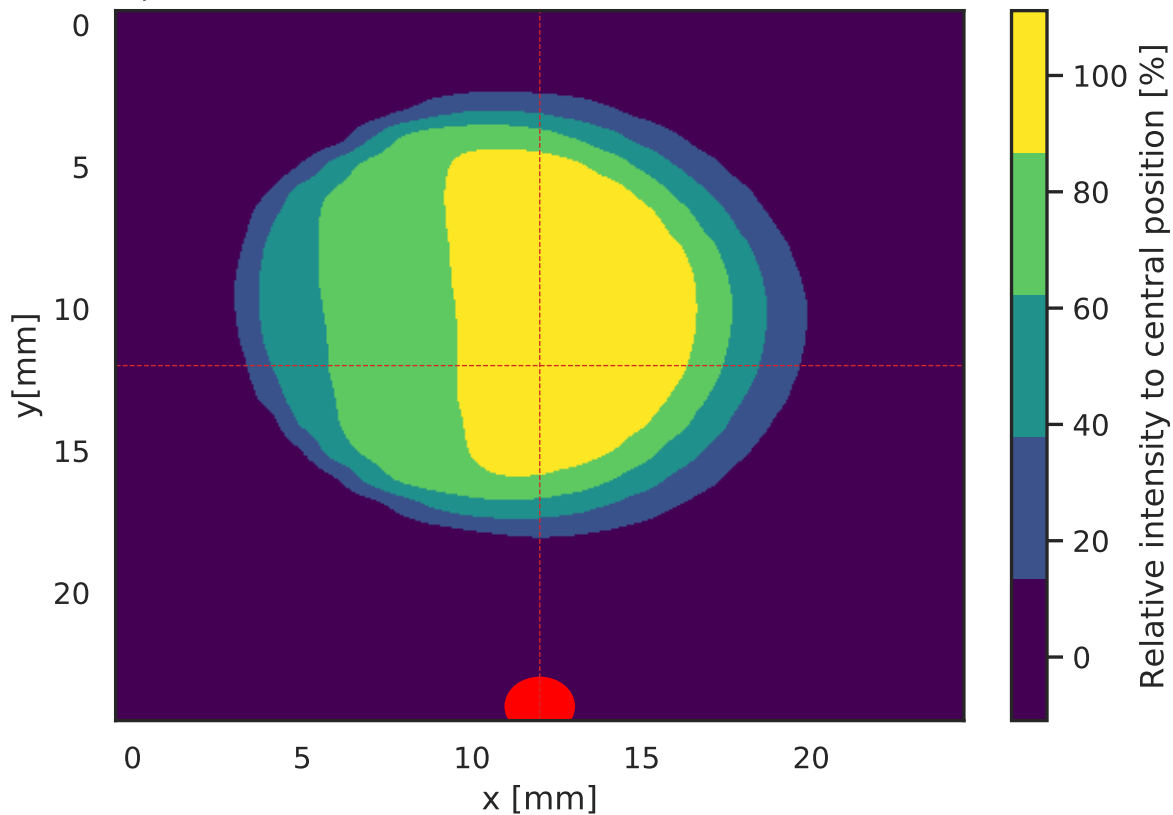

der (40 kV and 50mA)

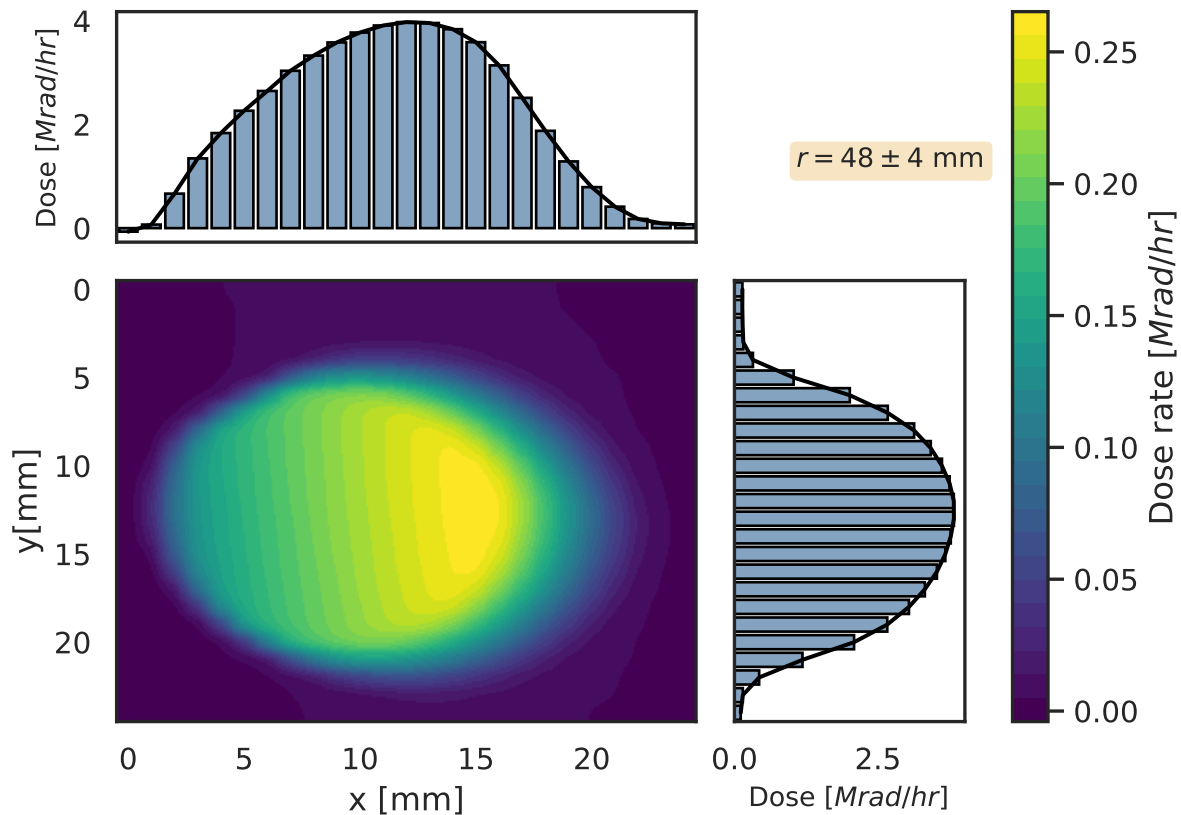

Beam profile at 60cm from the collimator holder (40 kV and 50mA)

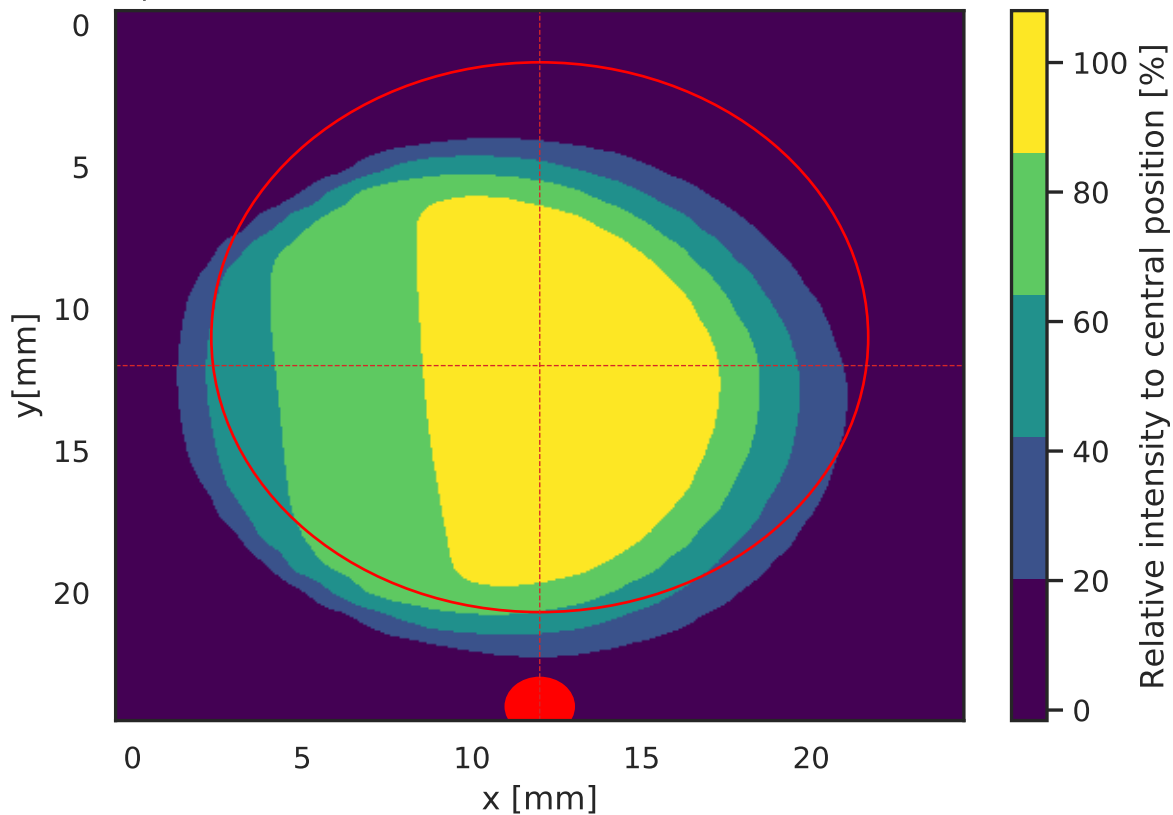

Hotspot at distance 60 cm, tube parameter: 40 kV, 50 mA, no fil

