




PVC-U FEMALE ADAPTOR

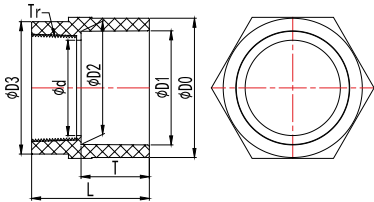

- With solvent cement socket metric and taper female thread Rp
- **Connection to plastic threads only**
- Do not use thread sealing pastes that are harmful to PVC-U
- Install with low mechanical stress and avoid large cyclic temperature changes

| Code | D | Dimensions (mm) | | | | | | | | Nominal Pressure PN(kg/cm²) |
|------------|----|-----------------|-------|-------|------|------|------|------|--------|--------------------------------|
| | | D0 | D1 | D2 | D3 | d | T | L | Tr | |
| 2010200301 | 20 | 27.1 | 20.3 | 19.95 | 27.6 | 16.5 | 16.5 | 33.5 | 1/2" | PN16 |
| 2010200302 | 25 | 32.5 | 25.3 | 24.95 | 33.6 | 22 | 19 | 37 | 3/4" | PN16 |
| 2010200303 | 32 | 40.3 | 32.3 | 31.9 | 41.3 | 28 | 22.5 | 42.2 | 1" | PN16 |
| 2010200304 | 40 | 49.5 | 40.35 | 39.9 | 51.1 | 36 | 26.5 | 49 | 1-1/4" | PN16 |
| 2010200305 | 50 | 61.6 | 50.35 | 49.9 | 59 | 42 | 31.5 | 54 | 1-1/2" | PN16 |
| 2010200306 | 63 | 77.4 | 63.4 | 62.9 | 73.6 | 53 | 38 | 65.5 | 2" | PN16 |
| 2010200307 | 75 | 90.4 | 75.4 | 74.9 | 90.2 | 68 | 44 | 76 | 2-1/2" | PN16 |