



VISITIGA
MEDIA




PRODUCT

**LED DISPLAYS &
AUDIO VISUAL**

VSERIES

LED DISPLAY

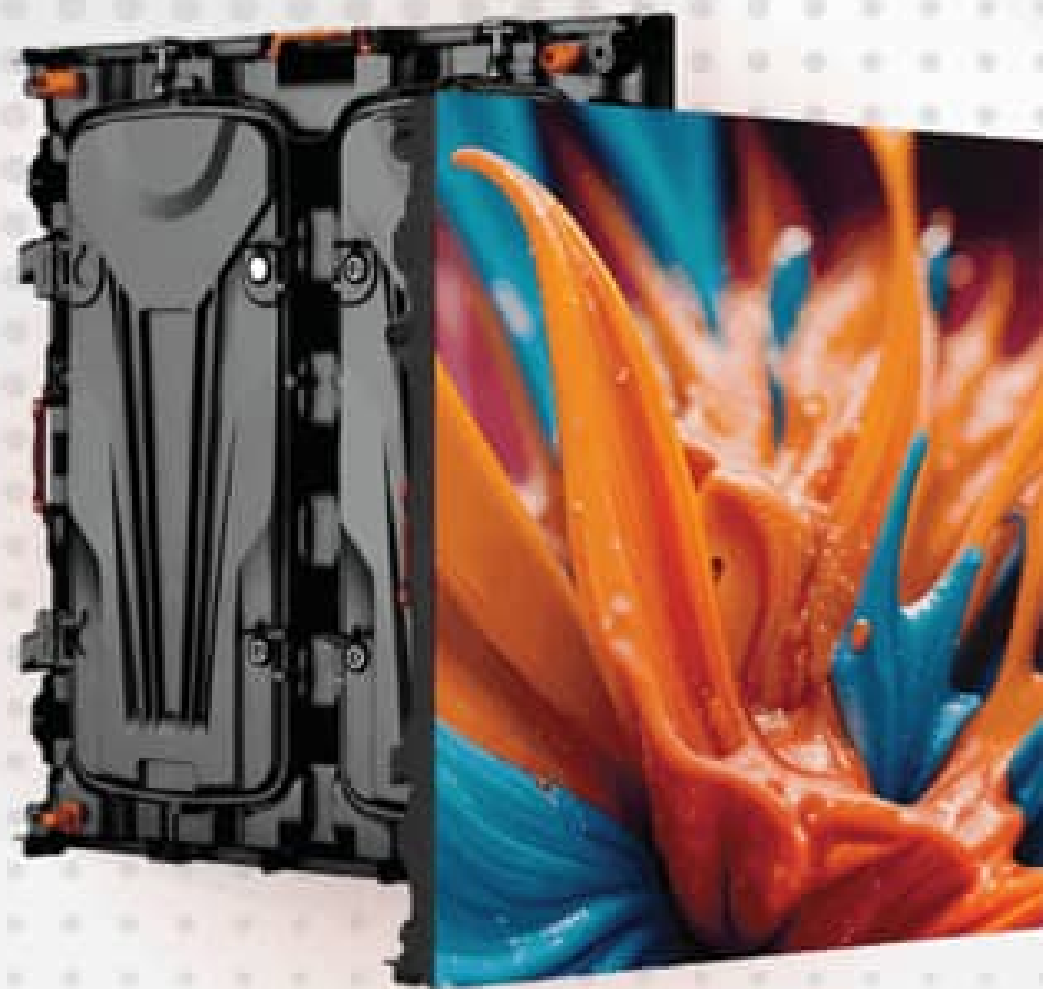

LED OUTDOOR

High definition LED display menggabungkan fine pixel pitch, high refresh rate, slim & lightweight cabinet, serta energy efficient technology untuk menghasilkan visual yang sharp dan flicker free, sekaligus memudahkan proses indoor installation. Cocok untuk berbagai aplikasi, mulai dari roadside billboard hingga commercial venue, untuk mendukung komunikasi yang lebih jelas di berbagai lokasi.

LED INDOOR

Tight pixel spacing dan rapid refresh rate menghasilkan visual yang fluid, vivid, dan stutter free, sehingga ideal untuk close viewing di conference rooms, hotel lobbies, dan storefronts.

Panel yang thin dan lightweight dengan low energy design memungkinkan proses setup yang cepat serta upkeep yang sederhana di interior bisnis. Cocok digunakan untuk kategori indoor commercial dan public display.



LED RENTAL

Fully portable LED display rentals untuk penggunaan indoor dan outdoor sangat cocok untuk concerts, corporate events, exhibitions, weddings, hingga retail pop-ups. Visual jarak dekat terlihat lebih hidup berkat precise pixel layout dan quick refresh rate, menghasilkan tampilan yang smooth dan flicker free meski di area ramai. Modul yang slim, lightweight, dan power efficient memungkinkan proses assembly, breakdown, serta upkeep dilakukan dengan cepat di berbagai lokasi.



Head Office

Bandung

Jl. Setra Dago Barat No.9, Kec. Antapani, Kota Bandung, Jawa Barat

Branch Office

Jakarta

Yogyakarta

Surabaya

e: marcomm@visitiga.com | p: +62 822-5878-8780

LED DISPLAY



LED TRANSPARENT

LED transparent display menghadirkan visual yang bright dan dinamis tanpa menghalangi visibility di balik layar, sehingga ideal digunakan pada glass surface dan modern architecture. Dengan desain yang lightweight, high brightness, serta energy efficient, display ini cocok untuk penggunaan indoor maupun outdoor. Sangat pas untuk storefront, facade, dan area komersial yang ingin menampilkan konten menarik tanpa blocking the view.

LED CREATIVE

LED Creative display menawarkan bentuk yang fleksibel dan customizable seperti curve, cylinder, hingga bentuk artistik lainnya, mengubah layar standar menjadi immersive visual experience. Dengan performa yang smooth dan warna yang vibrant, display ini sangat cocok untuk retail, exhibition, dan architectural installation yang ingin menciptakan tampilan brand yang unik dan eye-catching.



LED ALL IN ONE

LED All-in-One merupakan solusi display lengkap dengan konsep plug-and-play yang menggabungkan screen dan system dalam satu unit untuk setup yang cepat dan mudah. Desainnya yang slim dan portable, serta kualitas visual yang tinggi, membuatnya ideal untuk meeting room, event, dan presentation, dengan performa profesional tanpa instalasi yang kompleks.



Head Office

Bandung

Jl. Setra Dago Barat No.9, Kec. Antapani, Kota Bandung, Jawa Barat

Branch Office


Jakarta

Yogyakarta

Surabaya

e: marcomm@visitiga.com | p: +62 822-5878-8780

SUCCESS STORIES LED OUTDOOR

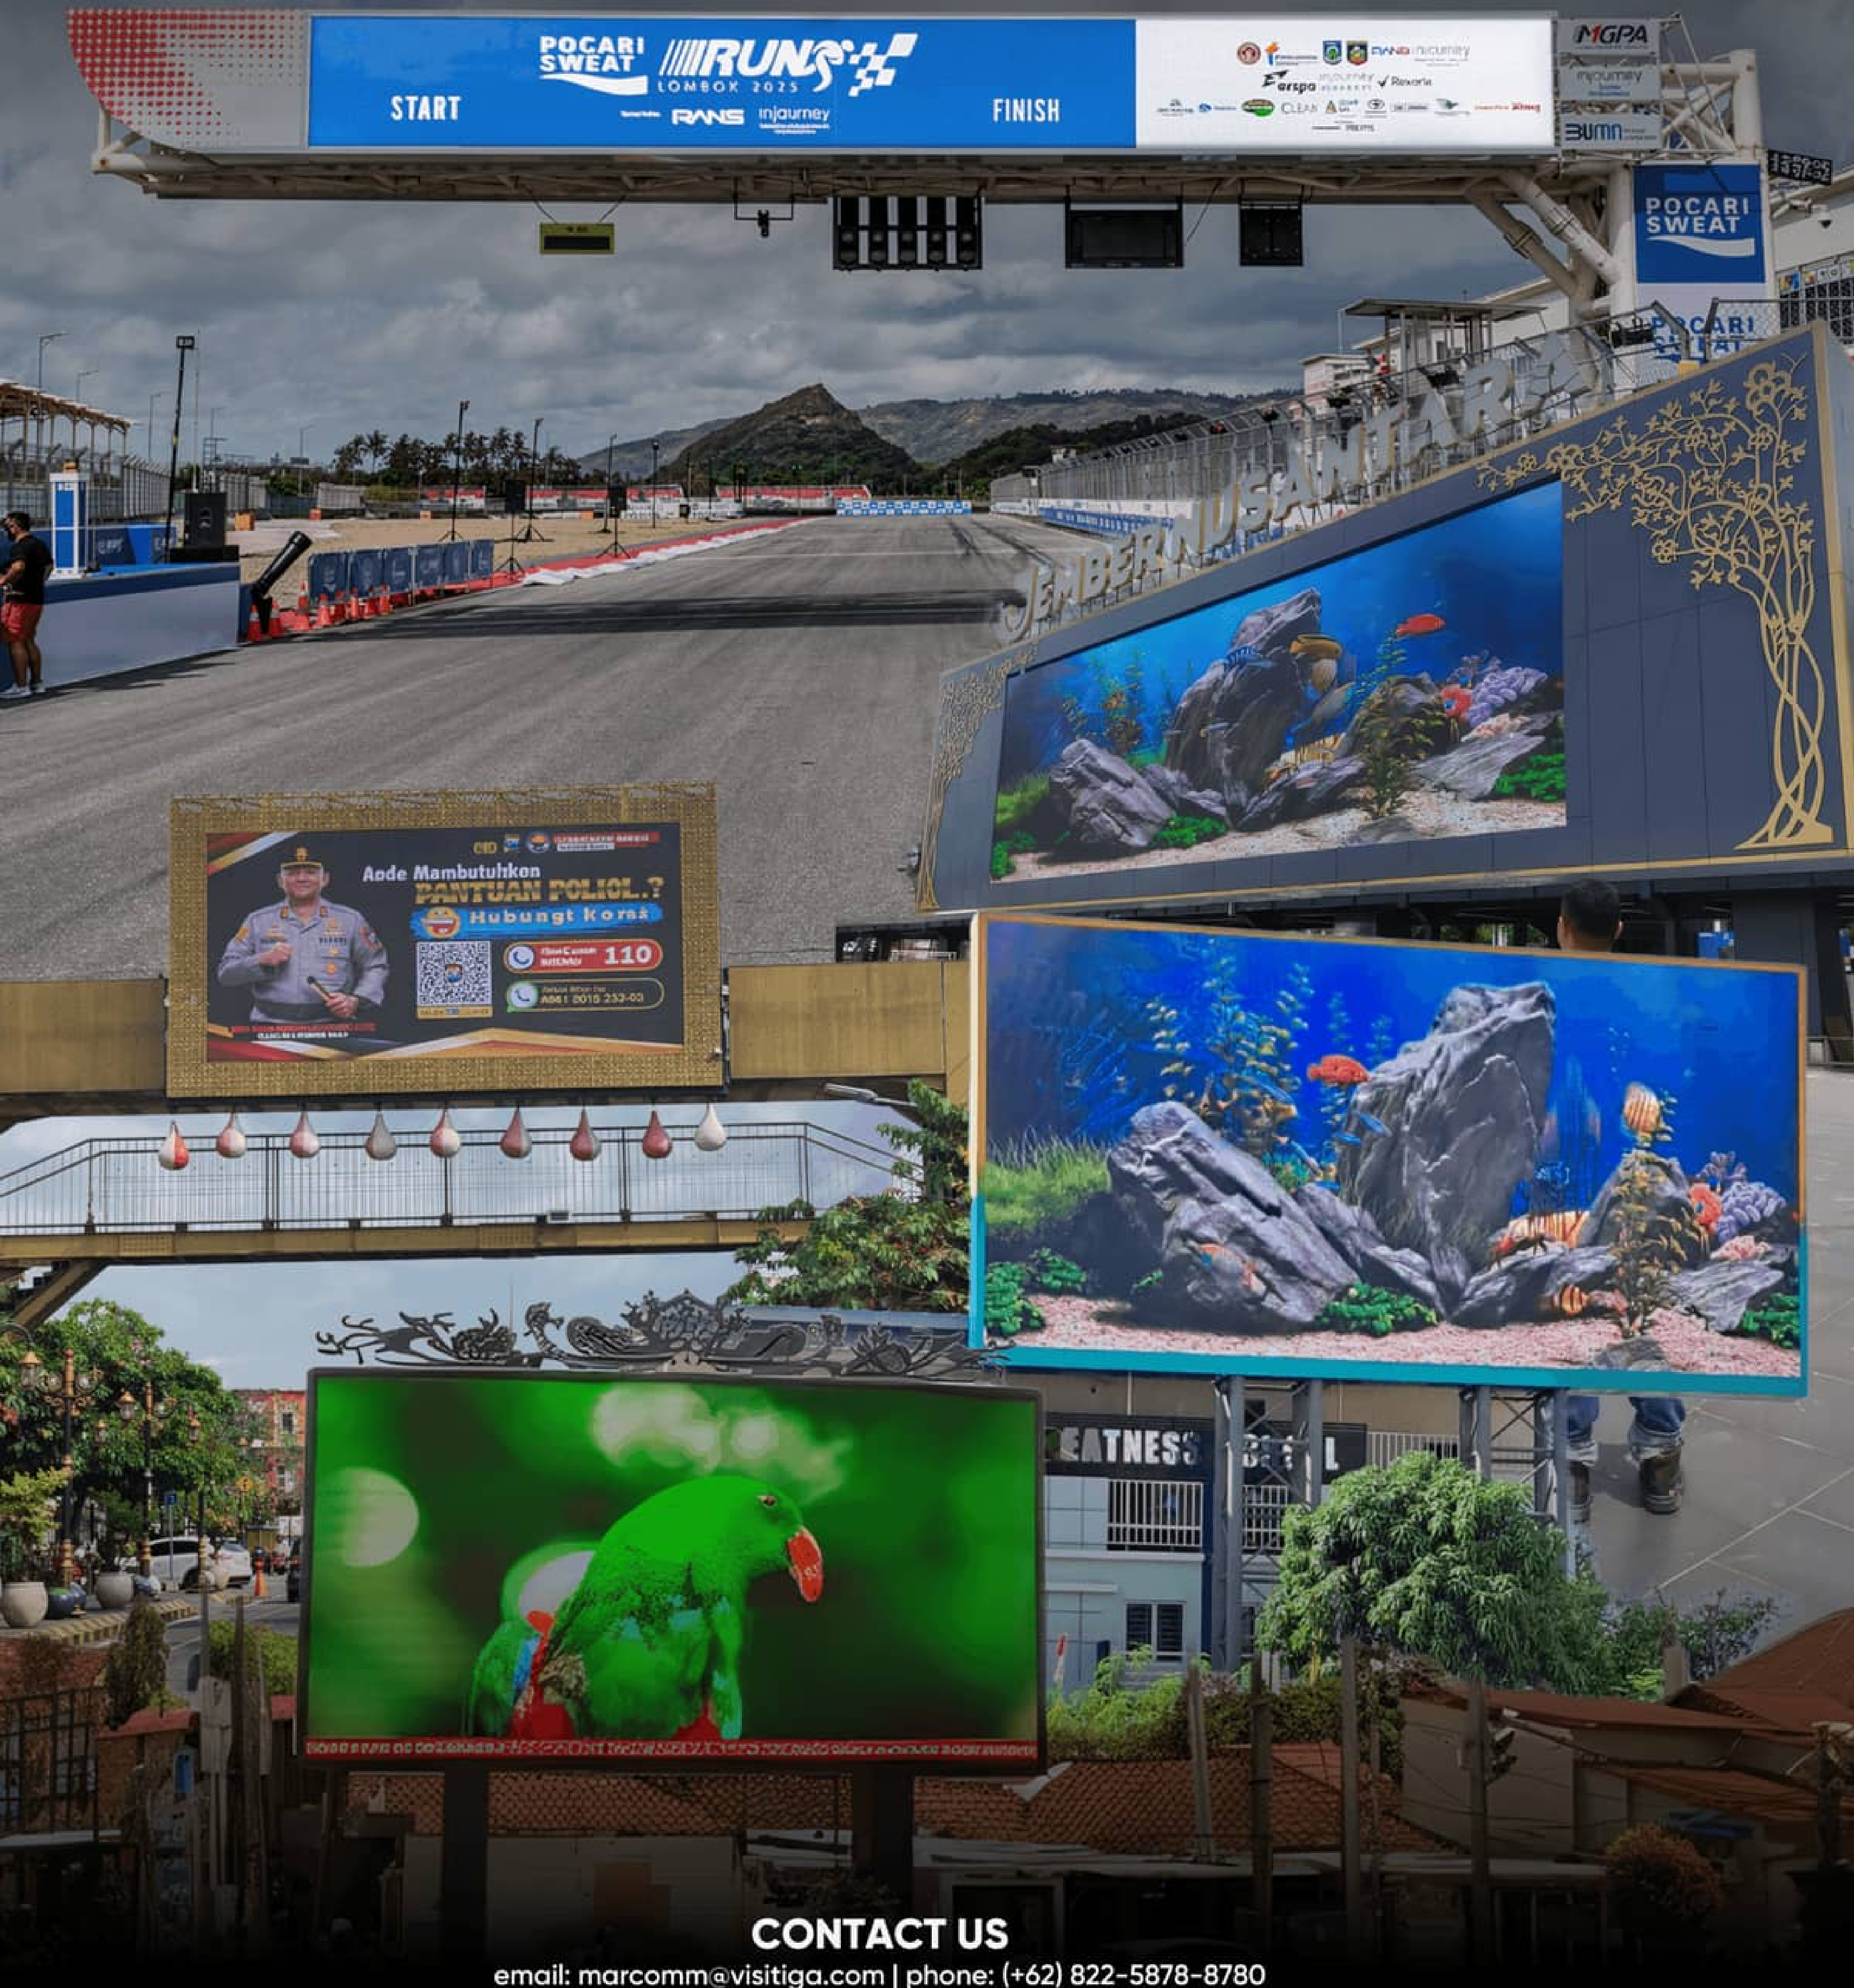

CONTACT US

email: marcomm@visitiga.com | phone: (+62) 822-5878-8780

LED OUTDOOR



Brightness



Refresh Rate



Light Weight Cabinet



Energy Saving



Area Application

- Roadside Billboard Advertising
- Commercial Venue
- School Information Display
- Sports Venue
- Transportation Hub
- Religious Information Display

1

High Brightness & Weather Resistant

Memiliki tingkat kecerahan tinggi (high brightness) sehingga tetap jelas terlihat di bawah sinar matahari langsung, serta didesain weather resistant untuk tahan terhadap hujan, panas, dan debu.

2

Wide Viewing Distance & Durable Performance

Mampu menjangkau audiens dari jarak jauh dengan visual yang tetap jelas, serta memiliki konstruksi yang durable untuk penggunaan jangka panjang di berbagai kondisi lingkungan outdoor.

PARAMETERS	OUTDOOR FIXED SERIES			
Pixel Pitch (mm)	10mm	8mm	6mm	5mm
Brightness (nit)	8.000 - 10.000	7.500 - 10.000	7.500 - 10.000	6.000 - 8.000
Refresh Rate (Hz)	3840Hz	3840Hz	3840Hz	3840 Hz
Power Consumption (Max./Avg.)(W/m)	800/230W/m	800/230W /m	800/230W/m	800/230W/m
Module Dimensions (WxH)/(mm)	320x160	320x160	192x192	320x160
AC Operation Voltage (V)	110v~240v+10%	100v~240VAC	110v~220VAC	100v~240VAC
Driving IC	ICN/SM	ICN/SM	ICN/SM	ICN/SM
Viewing Angle	(H140° ,(V)120°	(H140° ,(V)120°	(H140° ,(V)120°	(H140° ,(V)130°
Maintenance Type	Back Maintenance	Back Maintenance	Back Maintenance	Back Maintenance
Module Resolutions (Pixel)	32x16	40x20	32x32	64x32

PARAMETERS	OUTDOOR FIXED SERIES			
Pixel Pitch (mm)	4mm	3.9mm	3mm	2.5mm
Brightness (nit)	5.000 - 7.000	6.500 - 8.000	4.500 - 6.000	4.500 - 6.000
Refresh Rate (Hz)	3840Hz	3840Hz	3840Hz	3840Hz
Power Consumption (Max./Avg.)(W/m)	800/230W/m	800/230W/m	800/230W/m	800/230W/m
Module Dimensions (WxH)/(mm)	320x160	250x250	320x160	320x160
AC Operation Voltage (V)	100v~240VAC	100v~240VAC	110~240VAC	110~240VAC
Driving IC	ICN/SM	ICN/SM	ICN/SM	ICN/SM
Viewing Angle	(H140° ,(V)120°	(H160° ,(V)160°	(H140° ,(V)120°	(H140° ,(V)120°
Maintenance Type	Back Maintenance	Back/Front Maintenance	Back Maintenance	Back Maintenance
Module Resolutions (Pixel)	80x40	64x64	104x52	128x64

SUCCESS STORIES LED INDOOR



HORIZONTAL EVACUATION

REKAMINGAN: 8000-0000
x 8000 211 130 0000000

REKAMINGAN: 8000-0000
x 8000 211 130 0000000

REKAMINGAN: 8000-0000
x 8000 211 130 0000000

REKAMINGAN: 8000-0000
x 8000 211 130 0000000

matahari

ONE STOP SERVICE

GUESS

GUESS

injourney
DESTINATIONS

TWBS

Waramudra

Dharmacakramudra

Dhyanamudra

CONTACT US

email: marcomm@visitiga.com | phone: (+62) 822-5878-8780

LED INDOOR



Brightness



Refresh Rate



Light Weight Cabinet



Energy Saving



Area Application

- Office Meeting Room
- Hotel Ballroom
- School/Campus
- Airport & Station
- Public Services & Utilities
- Retail Store

1

High-Definition Visual Clarity:

Menggunakan fine pixel pitch dan high refresh rate untuk menghasilkan tampilan yang smooth, sharp, dan flicker free, sehingga ideal untuk close-up viewing di meeting room, hotel, maupun retail space.

2

Sleek & Efficient Design:

Menggunakan lightweight dan slim cabinet serta energy-saving technology yang memungkinkan proses instalasi berjalan seamless serta memudahkan maintenance di lingkungan indoor profesional.

PARAMETERS	INDOOR FIXED SERIES			
Pixel Pitch (mm)	3.9mm	3mm	2.5mm	1.86mm
Brightness (nit)	600 - 800	600 - 800	600 - 800	600 - 800
Refresh Rate (Hz)	3840Hz	3840Hz	3840Hz	3840Hz
Power Consumption (Max./Avg.)(W/m)	500W/m ²	750W/m ²	750W/m ²	780W/m ²
Module Dimensions (WxH)/(mm)	250x250	320x160	320x160	320x160
AC Operation Voltage (V)	100v~220VAC	100v~220VAC	100v~220VAC	110~220VAC
Driving IC	ICN/SM	ICN/SM	ICN/SM	ICN/SM
Viewing Angle	(H)160°, (V)140°	(H)160°, (V)140°	(H)160°, (V)140°	(H)160°, (V)140°
Maintenance Type	Back/Front Maintenance	Back/Front Maintenance	Back/Front Maintenance	Back/Front Maintenance
Module Resolutions (Pixel)	64x64	106x53	128x64	172x86

PARAMETERS	INDOOR FIXED GOB - COB SERIES			
Pixel Pitch (mm)	2.5mm	1.86mm	1.53mm	1.25mm
Brightness (nit)	600 - 800	600 - 800	600 - 800	600 - 800
Refresh Rate (Hz)	3840Hz	3840Hz	3840Hz	3840Hz
Power Consumption (Max./Avg.)(W/m)	750W/m ²	750W/m ²	750W/m ²	750W/m ²
Module Dimensions (WxH)/(mm)	320x160	320x160	320x160	320x160
AC Operation Voltage (V)	110~240VAC	110~240VAC	110~240VAC	110~240VAC
Driving IC	ICN/SM	ICN/SM	ICN/SM	ICN/SM
Viewing Angle	(H)160°, (V)140°	(H)160°, (V)140°	(H)160°, (V)140°	(H)160°, (V)140°
Maintenance Type	Back/Front Maintenance	Back/Front Maintenance	Back/Front Maintenance	Back/Front Maintenance
Module Resolutions (Pixel)	128x64	172x86	208x104	256x128

SUCCESS STORIES LED RENTAL



CONTACT US

email: marcomm@visitiga.com | phone: (+62) 822-5878-8780

LED RENTAL

outdoor & indoor



Brightness



Refresh Rate



Light Weight Cabinet



Energy Saving



Area Application

- Concerts and Music Festivals
- Corporate Events
- Exhibitions
- Weddings
- Stadiums
- Retail Pop ups

1

High Performance Visuals

Menghadirkan visual yang sharp, smooth, dan flicker free dengan high refresh rate, sehingga tetap optimal dilihat di berbagai kondisi, termasuk area ramai dan jarak dekat maupun jauh.

2

Flexible & Fully Portable

Mudah dipasang dan dibongkar (fast assembly & breakdown), cocok untuk berbagai kebutuhan seperti event, konser, exhibition, hingga corporate event di indoor maupun outdoor.

PARAMETERS	RENTAL OUTDOOR	
Pixel Pitch (mm)	3.9mm	2.9mm
Brightness (nit)	5.500	4.500
Refresh Rate (Hz)	3840Hz	3840Hz
Power Consumption (Max./Avg.)(W/m)	800W/m	800W/m
Module Dimensions (WxH)/(mm)	250x250	250x250
AC Operation Voltage (V)	AC220V/50Hz or AC100V/60Hz	AC220V/50Hz or AC100V/60Hz
Driving IC	ICN/SM	ICN/SM
Viewing Angle	(H)140° ,(V)140°	(H)140° ,(V)140°
Maintenance Type	Back/Front Maintenance	Back/Front Maintenance
Module Resolutions (Pixel)	64x64	84x84

PARAMETERS	RENTAL INDOOR	
Pixel Pitch (mm)	3.9mm	2.6mm
Brightness (nit)	1.000	1.000
Refresh Rate (Hz)	3840Hz	3840Hz
Power Consumption (Max./Avg.)(W/m)	600W/m	600W/m
Module Dimensions (WxH)/(mm)	250x250	250x250
AC Operation Voltage (V)	AC220V/50Hz or AC100V/60Hz	AC220V/50Hz or AC100V/60Hz
Driving IC	ICN/SM	ICN/SM
Viewing Angle	(H)140° ,(V)140°	(H)140° ,(V)140°
Maintenance Type	Back/Front Maintenance	Back/Front Maintenance
Module Resolutions (Pixel)	64x64	96x96

LED DISPLAY **TRANSPARENT**



CONTACT US

email: marcomm@visitiga.com | phone: (+62) 822-5878-8780

LED TRANSPARENT

outdoor & indoor



Brightness



Refresh Rate



Light Weight Cabinet



Energy Saving



1

Lightweight & High Brightness Performance

Dibuat dengan material lightweight, dilengkapi high brightness dan energy efficient, sehingga tetap optimal digunakan di indoor maupun outdoor dengan tampilan visual yang tetap standout.

Area Application

- Storefront windows
- Building facades
- Airports & Transporations hubs
- Showrooms

2

See-Through Design & Modern Aesthetic

Memiliki desain transparan (see-through) yang tetap menjaga visibility di balik layar, sehingga sangat cocok untuk glass facade, storefront, dan bangunan modern tanpa menghalangi tampilan.

PARAMETERS	TRANSPARENT OUTDOOR		
Pixel Pitch (mm)	15.625 x 15.625mm	20.8333 x 20.8333mm	31.25 x 15.625mm
Pixel Density	4,096	2,304	2,048
LED Sealing Type	LIP 3747 / SMD 3535	LIP 3747 / SMD 3535	LIP 3747
Module Resolutions	8 x 16	6 x 48	4 x 64
Drive Mode	Constant Current	Constant Current	Constant Current
Brightness	10,000 / 8,000	10,000 / 8,000	10,000
Grey Scale	16	16	16
Refresh Rate	7,680	7,680	7,680
Permeability	45%	60%	71%
Horizontal Viewing Angle	160°	160°	160°
Vertical Viewing Angle	Upward 25° / Down 75°	Upward 25° / Down 75°	Upward 25° / Down 75°
Max. Power Consumption	430+ 5% / 600 + 5%	430+ 5% / 600 + 5%	430+ 5%
Avg. Power Consumption	129/180	129/180	129
Module Size	125 x 1,000 x 27.3		
Module Weight	1.4	1.1	0.8
Cabinet Size	500 x 1,000 x 86.7 / 1,000 x 1,000 x 86.7		
Cabinet Weight	15	13	10
Input Voltage	AC 100 - 200 V	AC 100 - 200 V	AC 100 - 200 V
Working Temp.	-40 + 55 °C	-40 + 55 °C	-40 + 55 °C
Storage Temp.	-40 + 60 °C	-40 + 60 °C	-40 + 60 °C
Working Humidity	10% ~ 90% RH	10% ~ 90% RH	10% ~ 90% RH
Storage Humidity	10% ~ 60% RH	10% ~ 60% RH	10% ~ 60% RH
Maintenance Type	Front / Rear	Front / Rear	Front / Rear
Life Span	>100,000	>100,000	>100,000
Ingress Protection	IP68/IP66	IP68/IP66	IP68/IP66
Working Environment	Outdoor	Outdoor	Outdoor

A large-scale LED art installation in a gallery. At the top, a large globe of the Earth is suspended, with the word 'LED' in white and 'CREATIVE' in large orange letters overlaid. Below the globe, on the left, is a tall, narrow stack of blue LED panels on a black circular base. On the right, a large wall of white LED panels is arranged in a grid, with some panels glowing green and others red. The floor is dark and reflective.

LED CREATIVE

CONTACT US

email: marcomm@visitiga.com | phone: (+62) 822-5878-8780

LED CREATIVE



Brightness



Refresh Rate



Light Weight Cabinet



Energy Saving




1 **Immersive & Eye-Catching Visuals**
Menghadirkan visual yang vibrant dan dinamis, menciptakan pengalaman yang immersive serta menarik perhatian, cocok untuk retail, exhibition, dan instalasi arsitektural.

Area Application

- Exhibition & Experience centers
- Retail Flagship Stores
- Hotel & Hospitality spaces
- Museums & Art installations

2 **Flexible & Customizable Design**
Dapat dibentuk sesuai kebutuhan seperti curve, cylinder, hingga bentuk unik lainnya, memungkinkan tampilan yang lebih kreatif dan berbeda dari display konvensional.

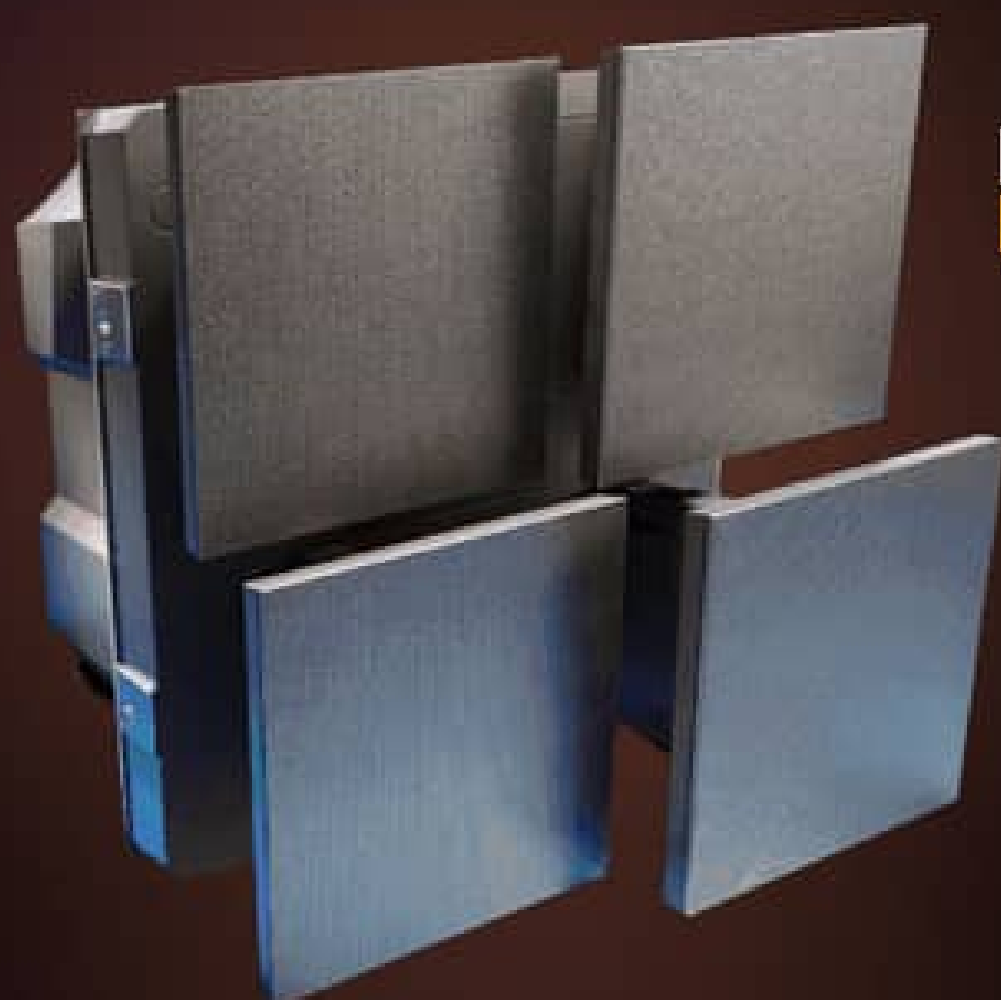

**LED
ROBOTIC**



**LED
SPHERE**



**LED
IMMERSIVE**

www.visitigamedia.com

LED ALL IN ONE



Area Application

- Meeting Room & Boardrooms
- Corporate Events
- Exhibitions & Trade Shows
- Lecture Hall

1

Plug-and-Play Convenience

Menggabungkan screen dan system dalam satu unit, sehingga setup menjadi cepat dan praktis tanpa instalasi yang kompleks.


2

Slim, Portable & Professional Performance

Desain slim dan portable dengan kualitas visual yang sharp dan stabil, ideal untuk meeting room, presentation, dan event dengan tampilan profesional.

CONTACT US

email: marcomm@visitiga.com | phone: (+62) 822-5878-8780

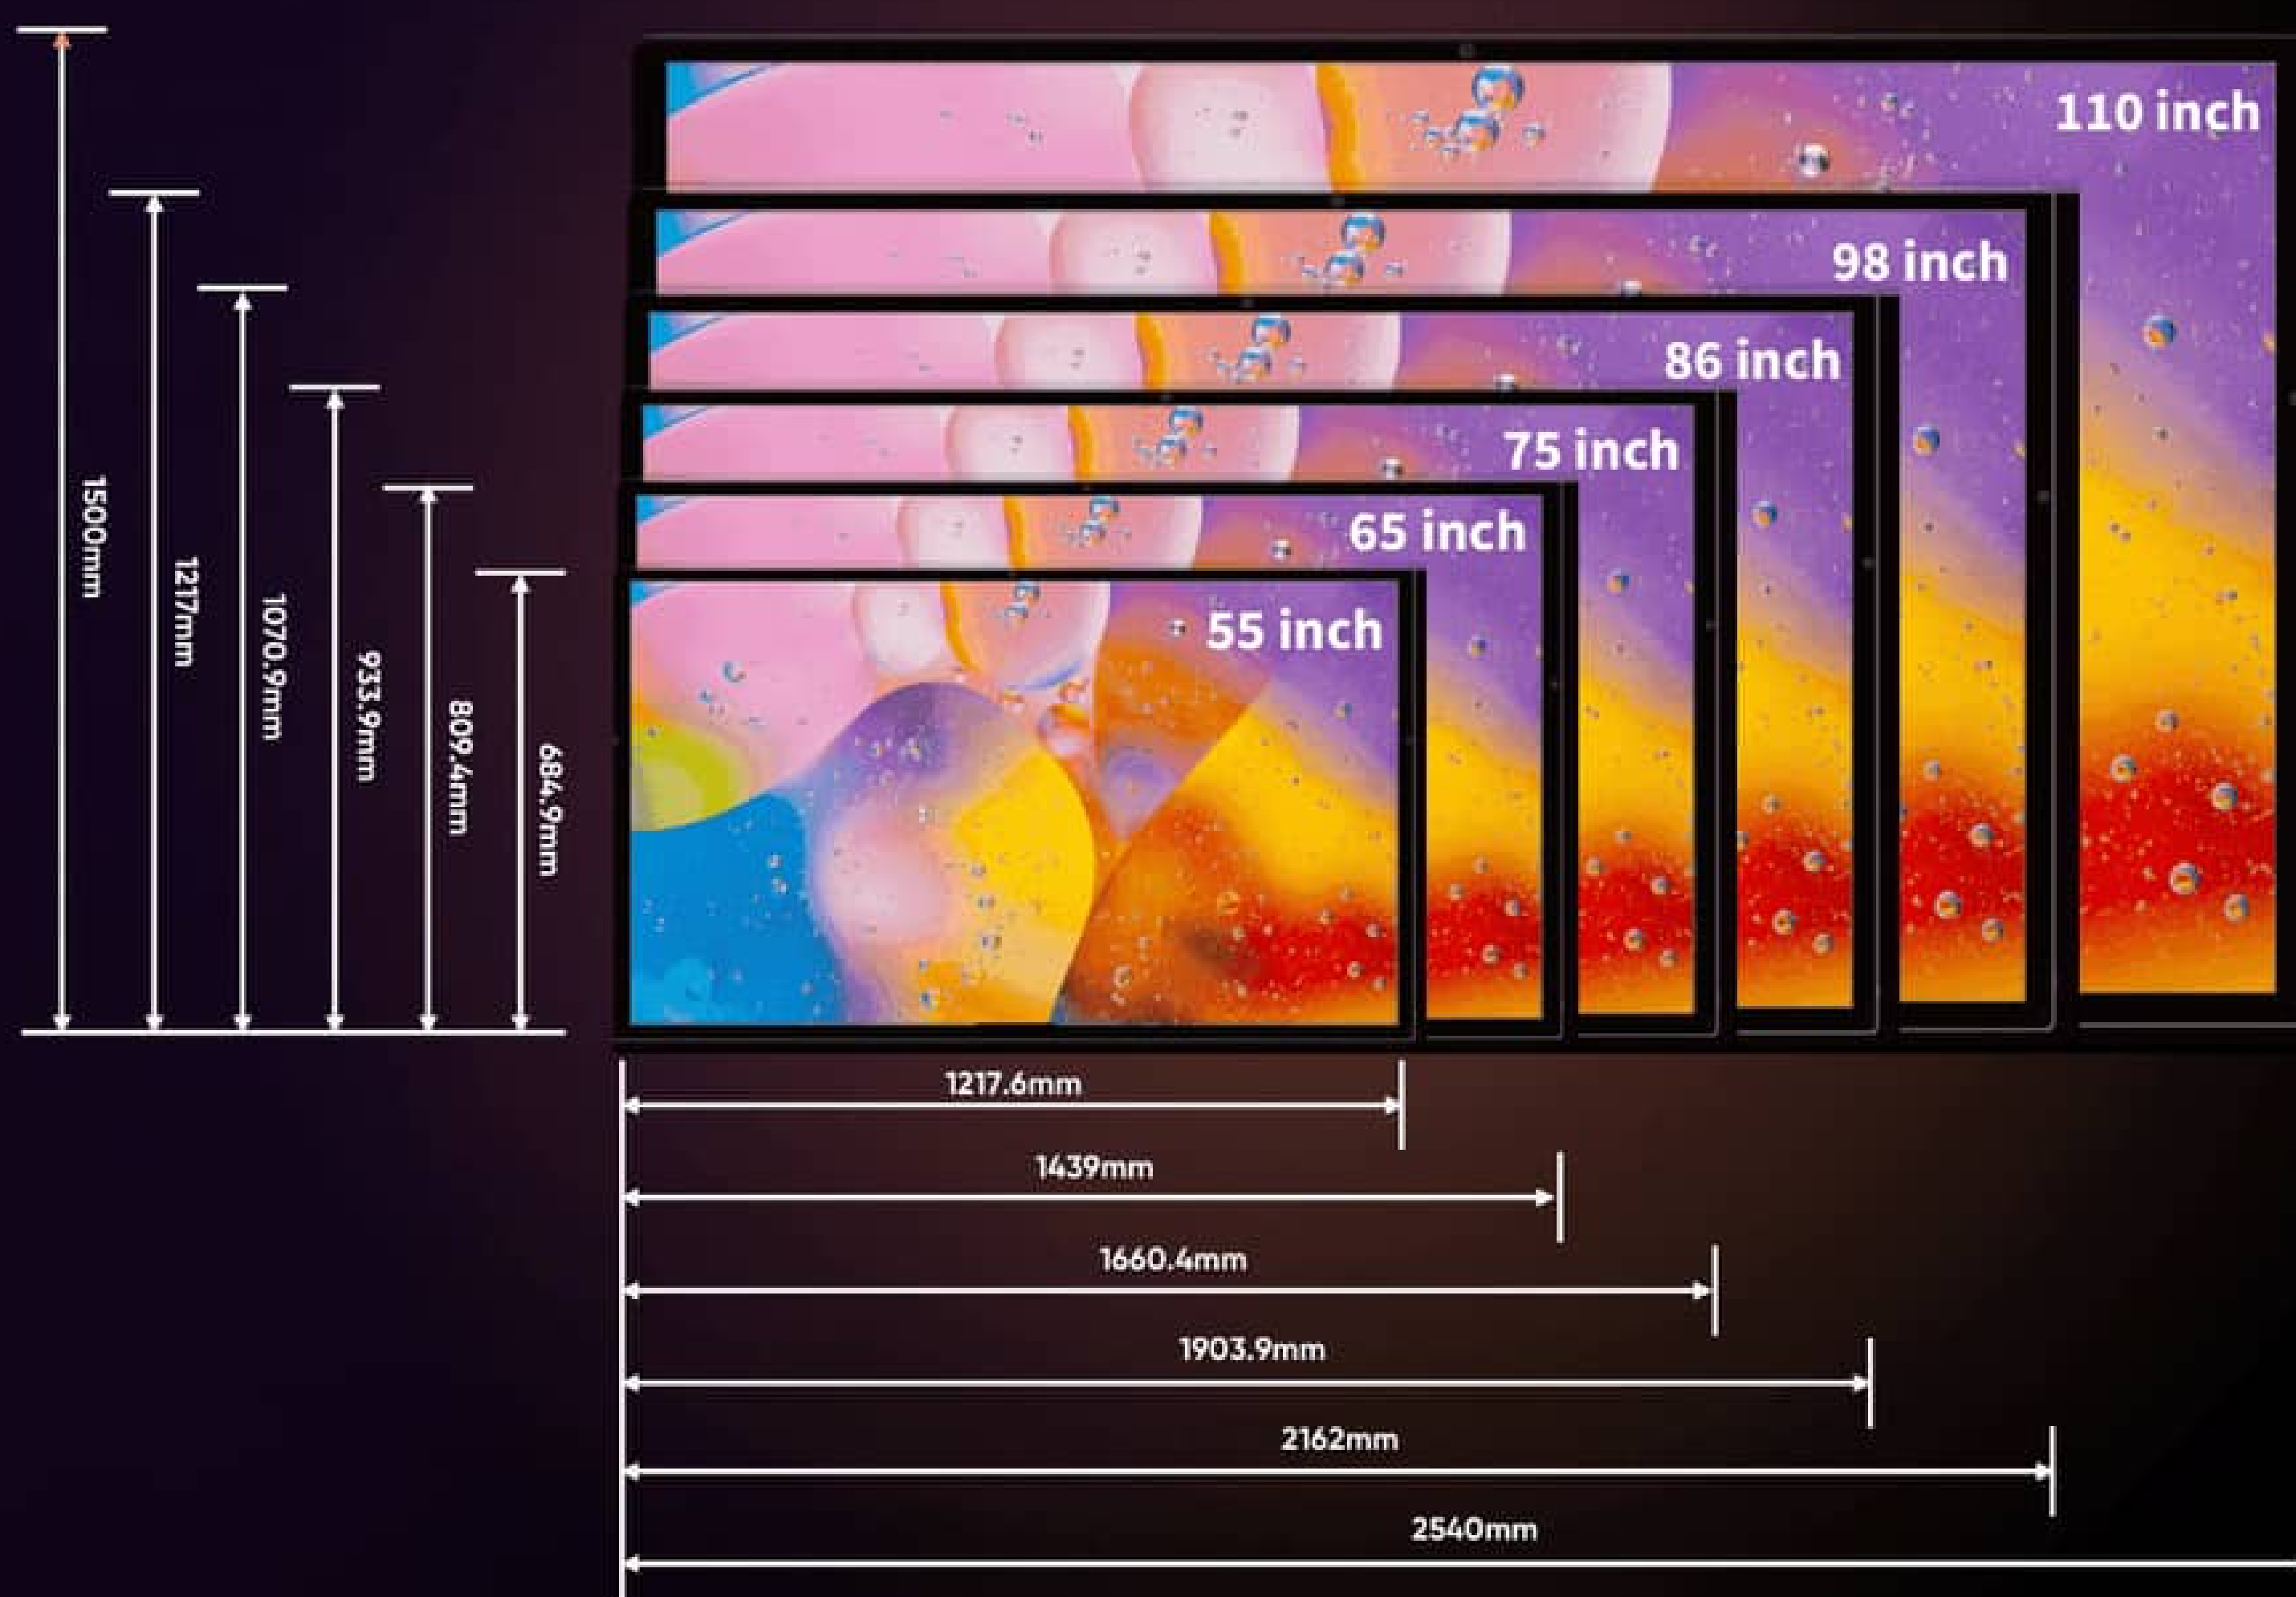

PARAMETERS		32 Inch	43 Inch	55 Inch	65 Inch	75 Inch	86 Inch
Display	Pixels	2K 1920x1080	4K 3840x2160				
	Brightness	450CD/m²	500CD/m²				
	Contrast Ratio	5000:1					
	Ratio	16:9					
	Refresh Rate	60 Hz					
	Viewing Angle	178° (H/V)					
	Lifespan	≥30,000 Hours					

PC Model	Version	Windows 8/10 (optional)
	CPU	Intel Core i5/i7 (optional)
	GPU	Intel HD Graphics
	Storage	DDR4 8G / 16G (optional)
	Hard Drive	128G / 256G (optional)

Android Model	CPU	Dual-core A73+Dual-core A53
	GPU	Mali-G51 MP4
	Internal Memory	4G
	Storage	16G
	Version	Android 8.0

Touch System	Screen Material	AG Glass
	Touch Principle	Infrared
	Touch Points	20 points
	Touch Object	Finger+Stylus
	Touch Accuracy	±1mm

Camera	Pixels	8/12 megapixel Optional
	Resolution	2K/4K Optional

Speakers	Power	2×10W
	Stereo	Support

Environment	Power Input	162~264V 50/60Hz
	Standby Power	≤0.5W

Microphone	Voice Pickup Range	8m
	Quantity	4

DIGITAL SIGNAGE



TOTEM

Kami menghadirkan digital signage dengan vibrant LCD display yang membuat pesan Anda lebih hidup. Dengan teknologi energy efficient, high resolution, dan dirancang untuk penggunaan indoor maupun outdoor, solusi kami dapat update secara real-time untuk meningkatkan engagement dan penjualan sekaligus menarik perhatian di berbagai lokasi.

VIDEOWALL

Kami menghadirkan seamless LCD videowall dengan high resolution visuals, warna yang vibrant, dan konten yang immersive untuk kebutuhan corporate maupun retail space. Dengan desain energy efficient, scalable, dan siap digunakan 24/7, solusi ini membantu meningkatkan branding serta menarik perhatian audiens secara maksimal.



IFP

Innovative LCD IFP menggabungkan interactive flat panel dengan visual yang stunning untuk classroom dan meeting room. Menghadirkan gambar yang sharp, touch yang smooth, serta seamless collaboration, solusi ini membantu meningkatkan produktivitas dan kreativitas. Dengan desain energy efficient dan siap untuk penggunaan harian, IFP mampu mengubah ruang menjadi lebih dinamis dan interaktif.

Head Office

Bandung

Jl. Setra Dago Barat No.9, Kec. Antapani, Kota Bandung, Jawa Barat

Branch Office

Jakarta

Yogyakarta

Surabaya

e: marcomm@visitiga.com | p: +62 822-5878-8780

Digital Signage TOTEM




Brightness



Refresh Rate



Energy Saving

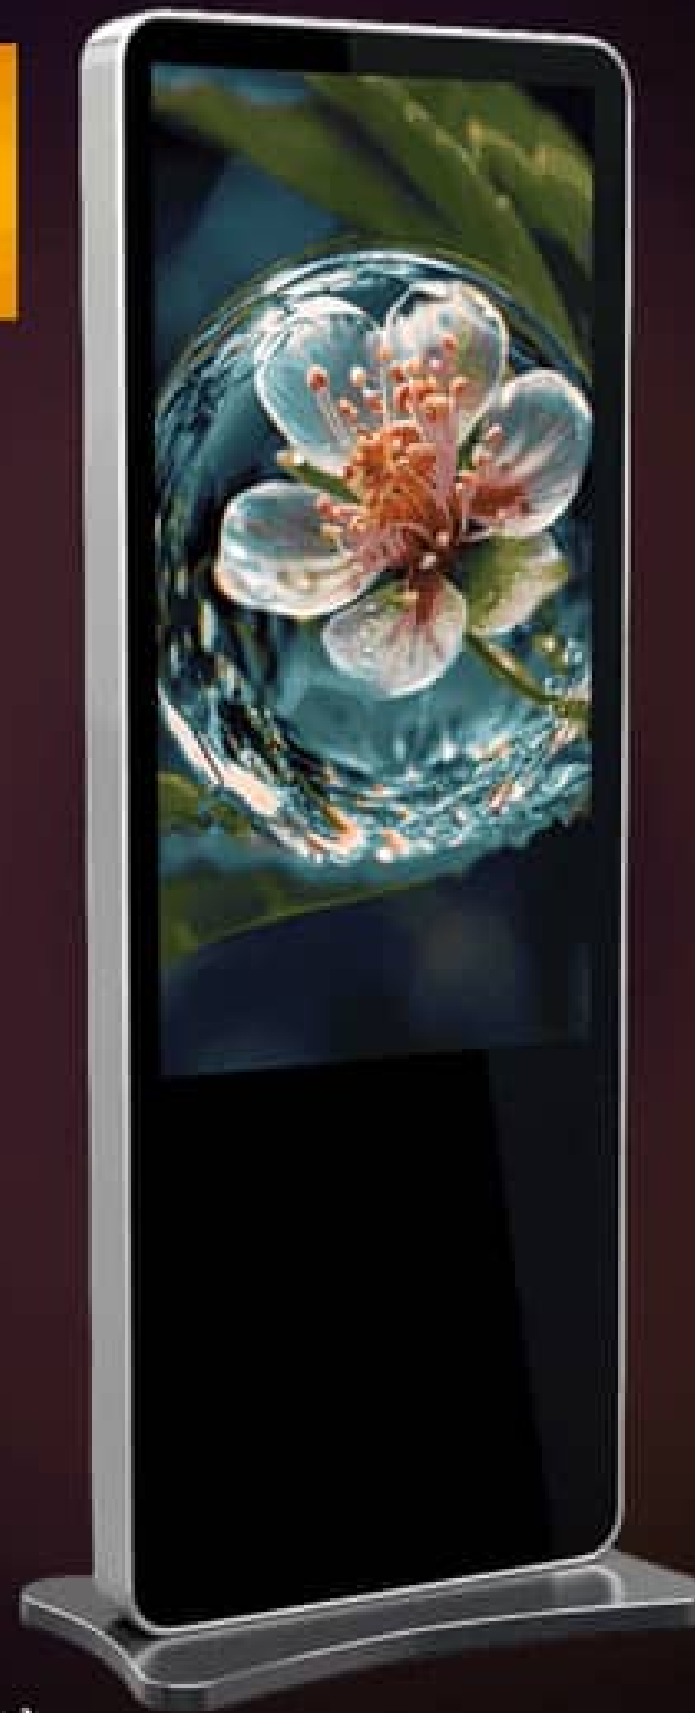

Area Application

- Retail Stores & Malls
- Hotels & Hospitality
- Quick Service Restaurants (QSR)
- Waiting Areas & Service Centers

Compact Vertical Design:

Freestanding, space-efficient display tanpa perlu wall installation, mudah dipindahkan untuk flexible placement.

Interactive Touchscreen Capability:

Built-in touch functionality untuk direct interaction, memungkinkan user selection, akses informasi, dan feedback secara interaktif.

PARAMETERS		32 Inch	43 Inch	55 Inch	65 Inch	75 Inch	86 Inch
Panel	Resolutions	1080x1920		2160x3840			
	Frame	Power Coated Steel Frame / Heat Treated Glass / Custom Colors and Finishes Available					
	Display Area (mm)	393x698	530x942	680x1210	803x1428	900x1600	1066x1895
	Aspect Ratio	9:16					
	Brightness (nits)	2500		3000			
	Color	1.67M					
	Viewing Angle	178°					
	Contrast Ratio	4000:1					
AV Inputs	Video	HDMI, USB					
Inputs	Max. Power Consumption (W)	800		1000			1200
	Input Voltage	AC110~240V (50~60Hz)					
Reference Physical Data	Unit Size (LxWxH)	600x180x1700	800x232x1800	904x272x1940	1000x390x1980	1246x256x2350	1248x380x2057
	Net Weight (Kg)	120	140	160	205	250	290
Environmental	Operating Temperature	-20°C~+60°C					
	Operationg Humidity	10%~80%					
	Storage Humidity	5%~90%					
	Enlosure Protection	IP65					
Internal Media Player	Operating System	Customisable					
Accessories	Included	AC Power Cable, Remote Control					
	Optional	Touch Screen Upgrade, Network Upgrade, Camera, Speaker, Dynamic Cooling System, Automatic Brightness Sensor					

Digital Signage VIDEOWALL



Brightness



Refresh Rate



Energy Saving



Area Application

- Retail & Shopping Centers
- Transportation Hubs
- Corporate Lobbies & Offices
- Events & Entertainment

Seamless Multi-Screen Display:

Multiple display panels dengan minimal bezels membentuk satu continuous visual surface untuk impactful content.

Remote Content Management:

Centralized control system untuk real-time scheduling, updating, dan content customization di semua screens dari satu platform.

PARAMETERS		49 Inch	55 Inch
Display	Backlight	Direct-lit LED Backlight	Direct-lit LED Backlight
	Pixel Pitch	0.56 mm	0.63 mm
	Physical Seam	3.5 mm	1.7 mm
	Bezel Width	2.3 mm (top/left), 1.2 mm (bottom/right)	2.3 mm (top/left), 1.2 mm (bottom/right)
	Resolution	1920 × 1080@60 Hz (downward compatible)	1920 × 1080@60 Hz (downward compatible)
	Active Display Area	1074.24 (H) mm × 604.26 (V) mm	1209.6 (H) mm × 680.4 (V) mm
	Brightness	500 cd/m ²	500 cd/m ²
	Viewing Angle	178°(H)/178°(V)	178°(H)/178°(V)
	Color Depth	8 bit, 16.7 M	8 bit, 16.7 M
	Contrast Ratio	1200:1	1200:1
	Response Time	8 ms (G to G)	8 ms (G to G)
	Color Gamut	72% NTSC	72% NTSC
	Surface Treatment	Haze 25%, 3H	Haze 25%, 2H
Interface	Video & Audio Input	VGA × 1, HDMI × 1, DVI × 1, DP × 1, USB × 1	HDMI × 1, DVI × 1, VGA × 1, DP × 1, USB × 1
	Video & Audio Output	HDMI × 1	HDMI × 1
	Control Interface	RS232 IN × 1, RS232 OUT × 1	RS232 IN × 1, RS232 OUT × 1
Power	Power Supply	100 to 240 VAC, 50/60 Hz	100 to 240 VAC, 50/60 Hz
	Power Consumption	≤ 200 W	≤ 245 W
	Standby Consumption	≤ 0.5 W	≤ 0.5 W
Working Environment	Working Temperature	0 °C to 40 °C (32 °F to 104 °F)	0 °C to 40 °C (32 °F to 104 °F)
	Working Humidity	10% RH to 80% RH (non-condensing)	10% RH to 80% RH (non-condensing)
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)	-20 °C to 60 °C (-4 °F to 140 °F)
	Storage Humidity	10% RH to 90% RH (non-condensing)	10% RH to 90% RH (non-condensing)
General	Casing Material	SGCC	Metal
	VESA	600 (H) mm × 400 (V) mm	600 mm × 400 mm
	Product Dimension	1078.34 (W) mm × 608.36 (H) mm × 71.1 (D) mm (42.45" × 23.95" × 2.8")	1212.7 mm × 683.5 mm × 72.41 mm (47.74" × 26.91" × 2.85")
	Packing Dimension	1292 (W) mm × 828 (H) mm × 218 (D) mm (50.87" × 32.60" × 8.58")	1308 mm × 834 mm × 221 mm (51.5" × 32.83" × 8.7")
	Net Weight	19.4 ± 0.5 kg (42.8 ± 1.1 lb) for single display	24.0 ± 0.5 kg (52.9 ± 1.1 lb) for single display
	Gross Weight	36.0 ± 0.5 kg (79.4 ± 1.1 lb) for carton with a single display	29.2 ± 0.5 kg (64.4 ± 1.1 lb) for carton with a single display
	Packing List	Carton with a single display : LCD display × 1, power cable × 1, network cable × 1, 2-meter HDMI cable × 1, screw × 4, remote control × 1, IR receiver × 1, RS-232 converter × 1, quick start guide (multilingual) × 1, quick start guide (English) × 1	Carton with a single display : LCD display × 1, power cable × 1, network cable × 1, 2-meter HDMI cable × 1, screw × 4, remote control × 1, IR receiver × 1, RS-232 converter × 1, quick start guide (multilingual) × 1, quick start guide (English) × 1

Digital Signage IFP



Area Application

- Education & Training
- Business & Meetings
- Healthcare
- Retail & Hospitality

Multi-touch Display Technology:
Memungkinkan multi-user interaction dengan finger gestures untuk collaborative work.

Integrated Software Ecosystem:
Dilengkapi built-in applications, screen mirroring, dan wireless connectivity untuk seamless content sharing serta interactive use.



Professional 4K Display

High Color Accuracy, ΔE≤2
Wide Color Gamut, NTSC 90%



Touch Screen

20 Touch Points,
Minimum Object Recognition – 2mm




Zoom Rooms

Pre-installed Zoom Rooms app
based on windows



Bring Your Own Device

Access to camera / microphone
/ speaker from your laptop



Built-in Camera

48million pixels
Offer the best view in both dark/bright
scene with WDR technology



Built-in Microphone

8 meters of voice pick-up




Built-in Speaker

2.1 Channel
2x 10W + 20W



Energy Saving

Energy Star 8.0 Certified*
(touch display)

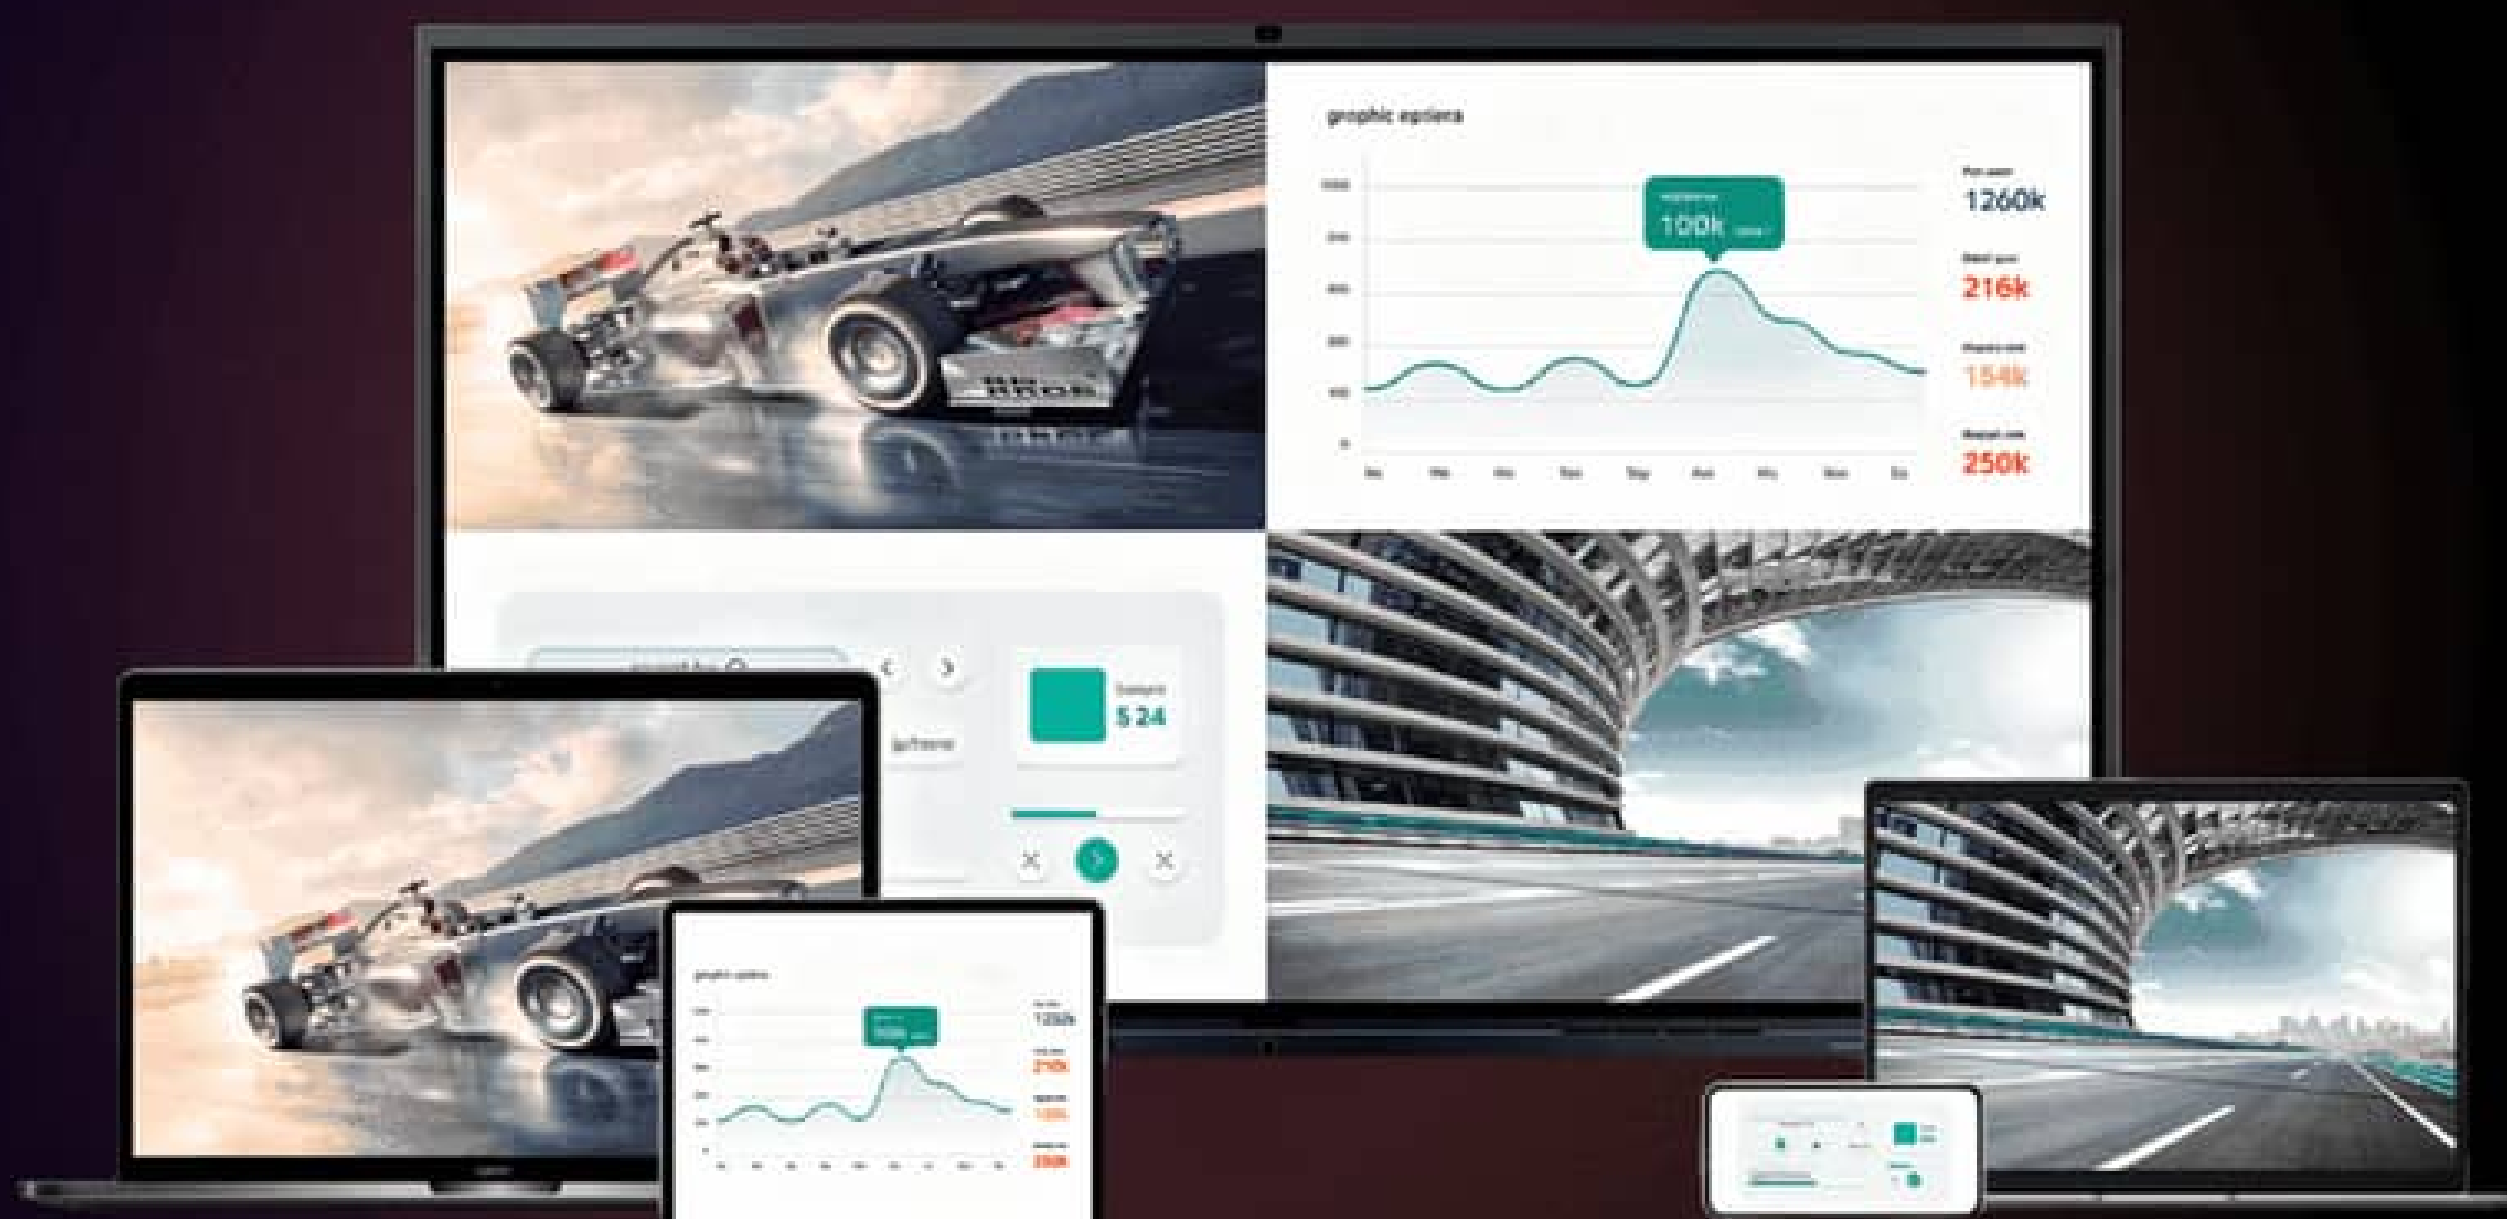

PARAMETERS		55 Inch		65 Inch		75 Inch		86 Inch	
Display	Backlight	Direct-lit LED							
	Panel Technology	IPS				VA			
	Aspect Ratio	16 : 9							
	Resolution	3840 x 2160							
	Refresh Rate	60Hz							
	Response Time	8ms				8.5ms		8ms	
	Brightness(typ)	350cd/m²							
	Contrast Ratio	1200 : 1				5000 : 1		4000 : 1	
	Viewing Angle	178°/178°							
	Color Gamut(typ)	90% NTSC							
	Display Orientation	Landscape							
	Operating Hour	16/7							
Dimension & Weight	Product Dimensions(WxHxD)	1263 x 776 x 88 mm	1488 x 903 x 88 mm	1709 x 1026 x 87 mm	1957.1 x 1160.1 x 100.2 mm				
	Shipping Dimensions(WxHxD)	1392 x 847 x 220mm	1638 x 1005 x 208mm	1863 x 1140 x 225 mm	2110 x 1283 x 225 mm				
	Net Weight (kg / pounds)	26.25kg	36.25kg	48.3kg	59.75kg				
	Gross Weight (kg / pounds)	34.2kg	46.75kg	62.8kg	77.00kg				
	Wall Mount(VESA)	400 x 200mm	600 x 400mm	800 x 400mm	800 x 600mm				
	Screws For VESA	M8 x 25mm	M8 x 25mm	M8 x 25mm	M8 x 25mm				
Power	Power Supply	AC100-240V,50/60Hz	AC100-240V,50/60Hz	AC100-240V,50/60Hz	AC100-240V,50/60Hz				
	Max Power Consumption	300W	350W	400W	400W				
	Standby	≤0.5W	≤0.5W	≤0.5W	≤0.5W				

TOUCH SYSTEM	
Touch Sensor	IR Touch
Max Touch Points Supported	20
Accuracy	±1mm
Glass	Zero parallax , 3mm Angi-glare, Antibacterial
Supported Operating System(Touch Return)	Windows10/Windows8/Windows7/WindowsXP/ Android/Linux/Mac OS X/Chrome OS

CAMERA/AUDIO/MICROPHONE	
Built-in Camera	Yes, Single Camera, 48MP
Camera Features	Auto Frame / Speaker Tracking
Built-in Speakers	2.1 Channel , 2x10W+20W
Microphone Array	8 x Far-field , beam-forming microphone – max 8m range

CONNECTIVITY	
Touch Sensor	HDMI IN x 1 , USB 2.0 x 1, USB 3.0 x 2, TOUCH 2.0 x 1 , USB Type-C x 2
Audio	Audio out x 1
Control	RS232 x 1
PC Module Slot	Yes, 3840 x 2160@60fps
Wifi Module	SI06

ENVIRONMENT	
Operating Temperature	0°C~40°C
Storage Temperature	-20°C~60°C
Operating Humidity	10%~90%RH
Storage Humidity	10%~90%RH

Audio Visual System

PT Visitiga Media menghadirkan solusi AV system modern untuk meeting room, conference hall, dan smart classroom. Kami mengintegrasikan high resolution LED display, crystal clear audio, intuitive control system, serta konektivitas yang andal untuk menciptakan pengalaman yang immersive.

Dirancang untuk meningkatkan kolaborasi, mempermudah presentasi, dan mendukung pembelajaran, solusi kami cocok untuk corporate, institusi pendidikan, hingga berbagai venue besar di seluruh Indonesia dengan performa yang seamless dan fleksibel.



The Value Proposition

Future-Proof Technology | User-Centric Design | End-to-End Support

The Application



Smart Meeting Room



Smart Meeting Room



Smart Auditorium

Head Office

Bandung

Jl. Setra Dago Barat No.9, Kec. Antapani, Kota Bandung, Jawa Barat

Branch Office

Jakarta

Yogyakarta

Surabaya

e: marcomm@visitiga.com | p: +62 822-5878-8780

Smart Meeting Room Solutions

Audio Visual System

HUDDLE

SMALL COLLABORATION ROOM

Ideal for quick team syncs, 1-on-1 meetings, and remote calls

2-6 pax ≤25 m²

ROOM LAYOUT



Small Meeting Room

REQUIRED DEVICES



LCD Display

55"-98" | 4K UHD | or Interactive Flat Panel



All-in-One Videobar

Camera + Mic + Speaker | USB/HDMI



Wireless Presentation System

Content sharing and distribution



Touch Control Panel

System management and control interface



HDMI / USB-C Hub

Multi-device connectivity and input

Plug-and-Play

BYOD Ready

One-Touch Join

Teams/Zoom/Meet

Head Office

Bandung

Jl. Setra Dago Barat No.9, Kec. Antapani, Kota Bandung, Jawa Barat

Branch Office

Jakarta

Yogyakarta

Surabaya

e: marcomm@visitiga.com | p: +62 822-5878-8780

MIDDLE

STANDARD CONFERENCE ROOM

Professional meetings, hybrid collaboration, and presentations

7-15 pax ≤25-80 m²

ROOM LAYOUT



Standard Smart Meeting Room

REQUIRED DEVICES



LCD Display

55"-98" | 4K UHD | or Interactive Flat Panel



Professional Speaker System

Room audio distribution



PTZ Camera

12x optical | Auto-tracking



VC Codec + Touch Controller

System control and management



Ceiling Microphone Array

360° pickup | Noise cancellation



Wireless Presentation System

Content sharing and distribution

Hybrid Ready

Auto-Tracking Camera

Recording Ready

Head Office

Bandung

Jl. Setra Dago Barat No.9, Kec. Antapani, Kota Bandung, Jawa Barat

Branch Office

Jakarta

Yogyakarta

Surabaya

e: marcomm@visitiga.com | p: +62 822-5878-8780

LARGE

CONFERENCE HALL / BOARDROOM

High-stakes presentations and multi-zone AV environments

16+ pax

≥80 m²

ROOM LAYOUT



Large Smart Meeting Room

REQUIRED DEVICES



LED Display

Fine-pitch LED | P1.2 - P2.5 | Custom size



Wireless / Gooseneck Mic Array

Flexible microphone solution



Multi PTZ Camera System

Integrated video and audio capture



AV Matrix Switcher

Signal routing and connectivity



Distributed Audio System

Multi-source audio distribution



Central Control System

Intuitive system management

LED Video wall

Multi-zone Audio

Recording Ready

Head Office

Bandung

Jl. Setra Dago Barat No.9, Kec. Antapani, Kota Bandung, Jawa Barat

Branch Office

Jakarta

Yogyakarta

Surabaya

e: marcomm@visitiga.com | p: +62 822-5878-8780

Smart Classroom Solutions

Interactive Learning Environment

ADVANCED COLLABORATIVE CLASSROOM

Group-based learning, multi-zone display, and active student participation

≤30 students

≤60 m²

ROOM LAYOUT



Smart Classroom

REQUIRED DEVICES



Interactive Flat Panel (IFP)

55-86" | 4K | Android + Windows OPS



PTZ Auto-Tracking Camera

4K | AI teacher tracking | Hybrid class broadcast



Ceiling Microphone Array

360° pickup | Noise cancellation



Distributed Speaker System

Ceiling speakers | Even coverage



Wireless Presentation System

Students push content to any screen | Multi-user

Touch Annotation

Screen Mirroring

Hybrid Class Ready

Zoom/Teams/Meet

BYOD

Head Office

Bandung

Jl. Setra Dago Barat No.9, Kec. Antapani, Kota Bandung, Jawa Barat

Branch Office

Jakarta

Yogyakarta

Surabaya

e: marcomm@visitiga.com | p: +62 822-5878-8780

Auditorium Solutions


Professional Audio Visual System

AUDITORIUM

High-stakes presentations and multi-zone AV environments

100 pax ≤300 m²

ROOM LAYOUT

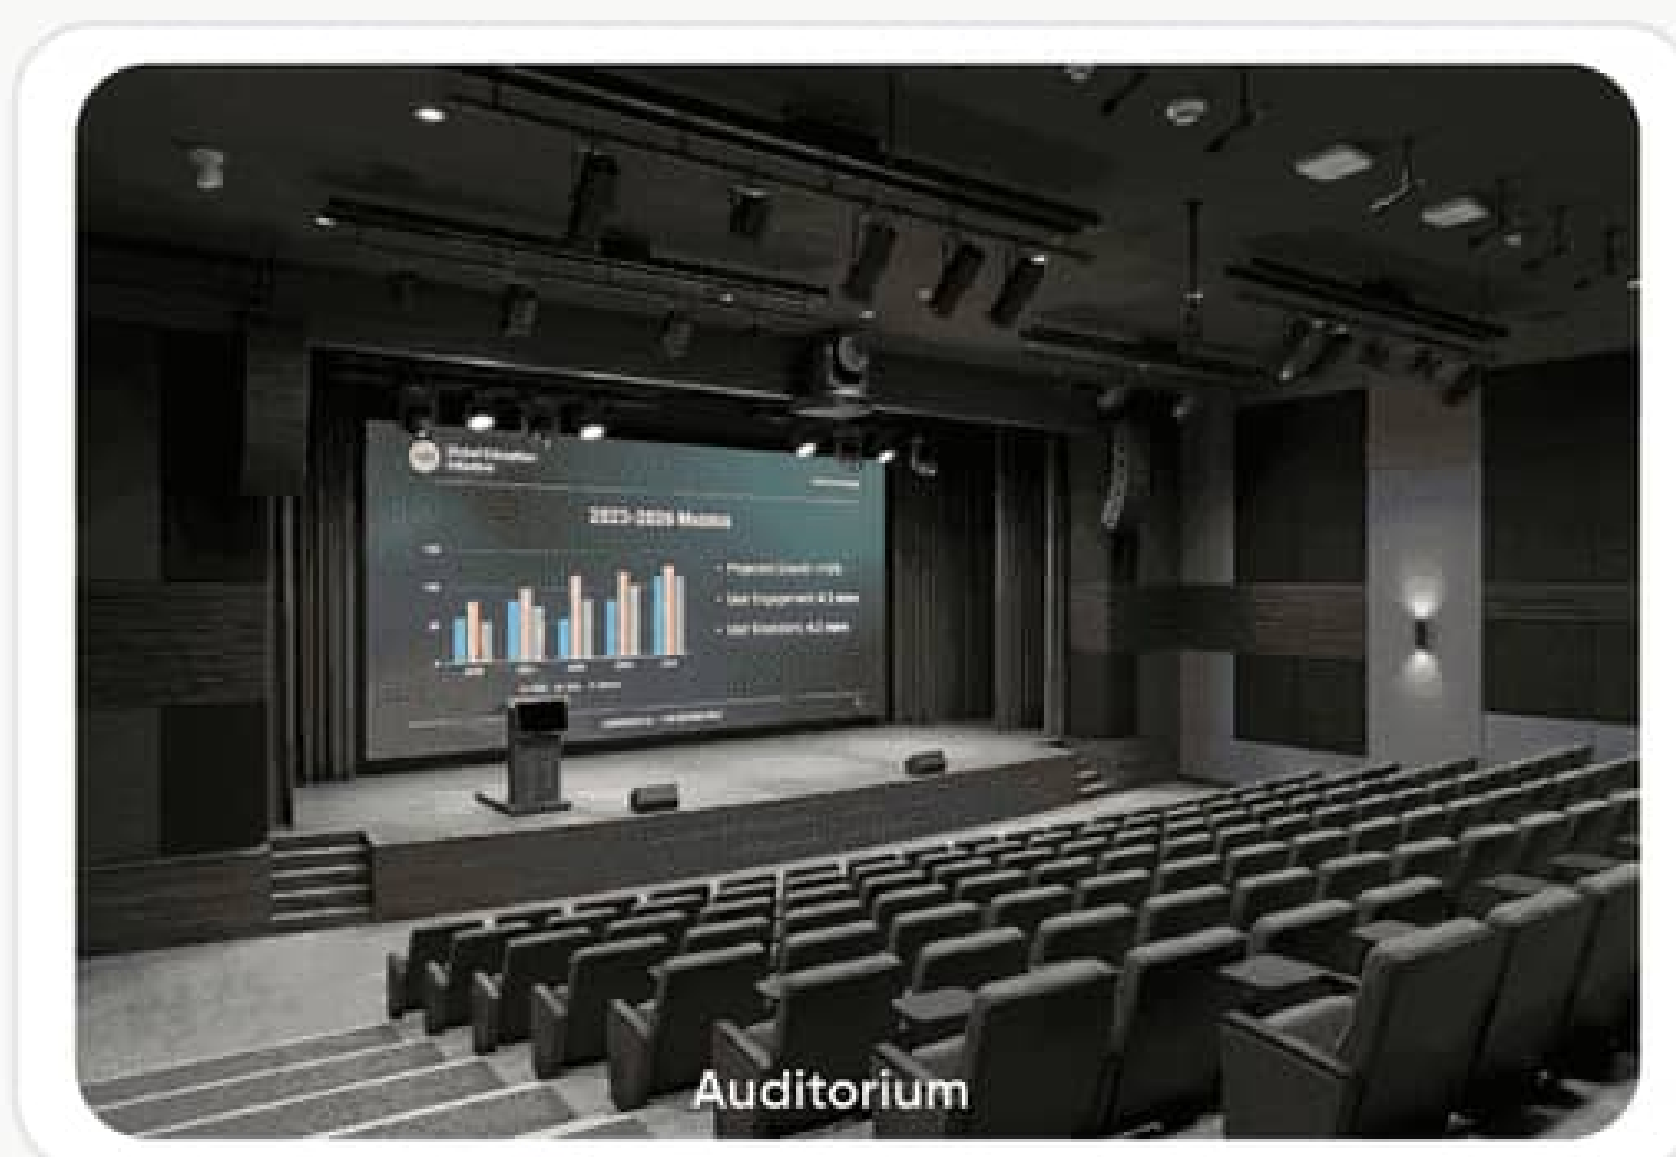

Auditorium

REQUIRED DEVICES



LED Display

Fine-pitch LED | P1.2–P2.5 | Custom size



Wireless / Gooseneck Mic Array

Flexible microphone solution



Multi PTZ Camera System

Integrated video and audio capture



Digital Podium

Presenter control and connectivity



Distributed Audio System

Multi-source audio distribution



Central Control System

Intuitive system management

LED Video wall

Multi-zone Audio

Recording Ready

Head Office

Bandung

Jl. Setra Dago Barat No.9, Kec. Antapani, Kota Bandung, Jawa Barat

Branch Office

Jakarta

Yogyakarta

Surabaya

e: marcomm@visitiga.com | p: +62 822-5878-8780