


Arduino Nano powered by USB-C.
Do not feed VIN.
Nano installed in 2x15 female
socket headers.

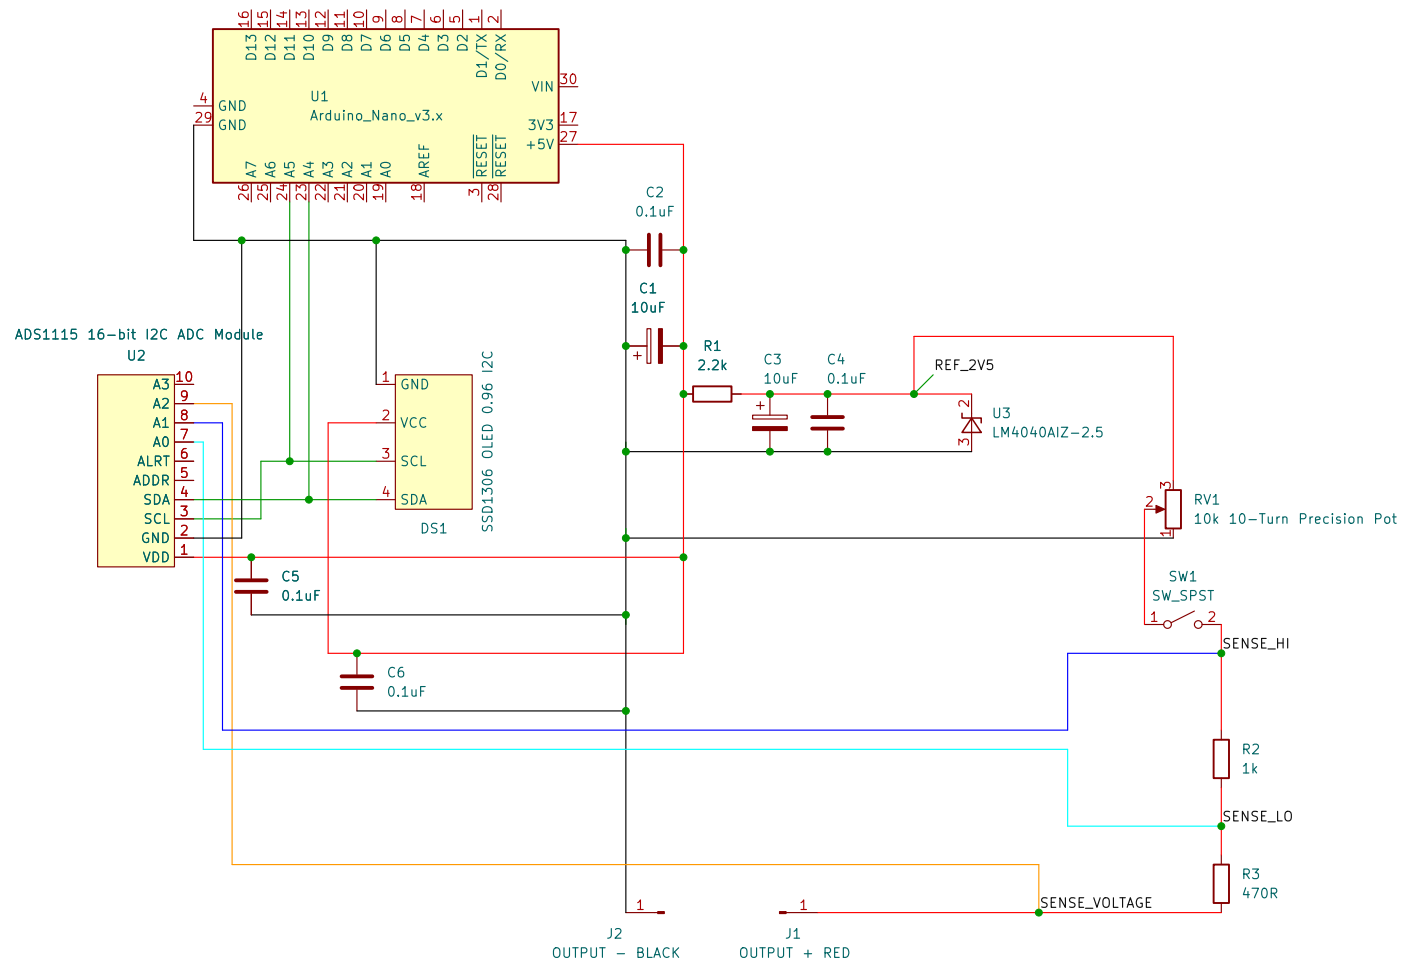

Andrew Hoiberg

Sheet: /

File: Accutron_Test_Set_1000.kicad_sch

Title: Modern Accutron Test Set

Size: A4

Date: sam. 04 avril 2015

Rev: v1

KiCad E.D.A. 10.0.3

Id: 1/1