LAB SQUI SNORT :

Configuration Pfsense :

System / General Setup

System

Hostname pfsense
Name of the firewall host, without domain part.

Domain mlif.local
Domain name for the firewall.

Do not end the domain name with '.local' as the final part (Top Level Domain, TLD). The 'local' TLD is widely used by mDNS (e.g. Avahi, Bonjour, Rendezvous, Airprint, Airplay) and some Windows systems and networked devices. These will not network correctly if the router uses 'local' as its TLD. Alternatives such as 'home.arpa', 'local.lan', or 'mylocal' are safe.

DNS Server Settings

DNS Servers 192.168.100.10 | DNS Hostname | Delete

192.168.100.10 | DNS Hostname | Delete

Address
Enter IP addresses to be used by the system for DNS resolution. These are also used for the DHCP service, DNS Forwarder and DNS Resolver when it has DNS Query Forwarding enabled.

Hostname
Enter the DNS Server Hostname for TLS Verification in the DNS Resolver (optional).

Add DNS Server + Add DNS Server

Création du certificat de l'autorité de certification

Create / Edit CA

Descriptive name CAMLIF
The name of this entry as displayed in the GUI for reference.
This name can contain spaces but it cannot contain any of the following characters: ?, >, <, &, /, \, ", '

Method Create an internal Certificate Authority

Trust Store ☐ Add this Certificate Authority to the Operating System Trust Store
When enabled, the contents of the CA will be added to the trust store so that they will be trusted by the operating system.

Randomize Serial ☐ Use random serial numbers when signing certificates
When enabled, if this CA is capable of signing certificates then serial numbers for certificates signed by this CA will be automatically randomized and checked for uniqueness instead of using the sequential value from Next Certificate Serial.

Internal Certificate Authority

Key type RSA

2048
The length to use when generating a new RSA key, in bits.
The Key Length should not be lower than 2048 or some platforms may consider the certificate invalid.

Digest Algorithm sha256
The digest method used when the CA is signed.
The best practice is to use an algorithm stronger than SHA1. Some platforms may consider weaker digest algorithms invalid

Lifetime (days) 3650

Common Name internal-ca

The following certificate authority subject components are optional and may be left blank.

Country Code FR

State or Province IDF

City PARIS

Organization MLIF

Organizational Unit CA

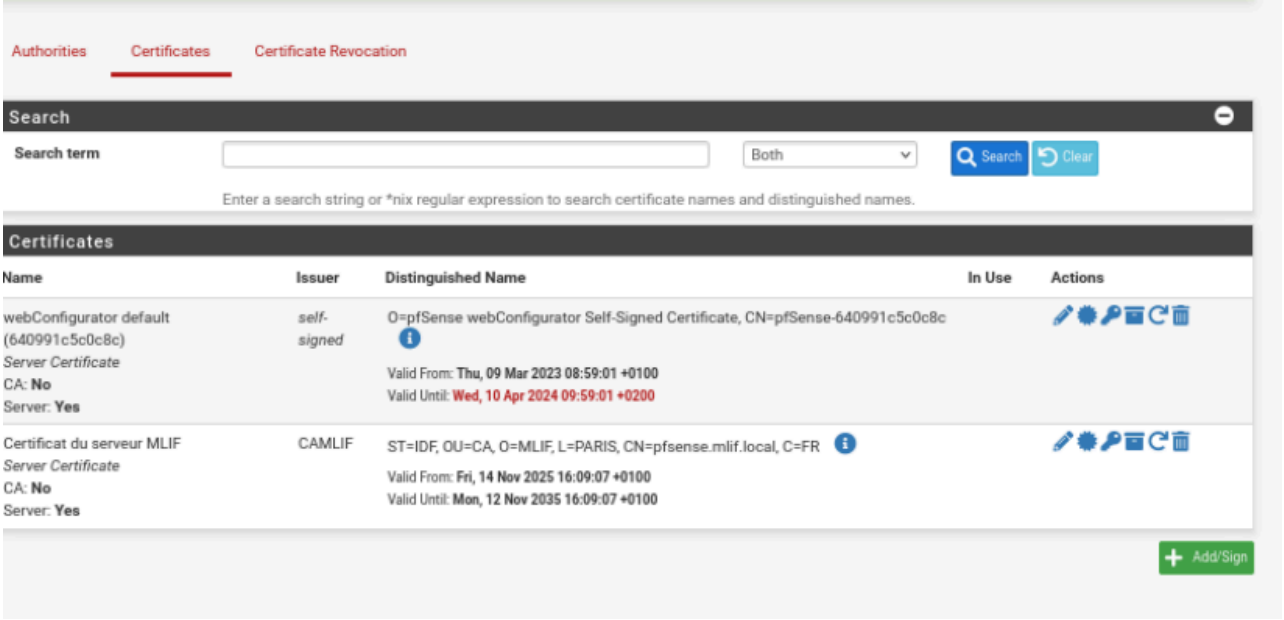

Configuration du cache de squid

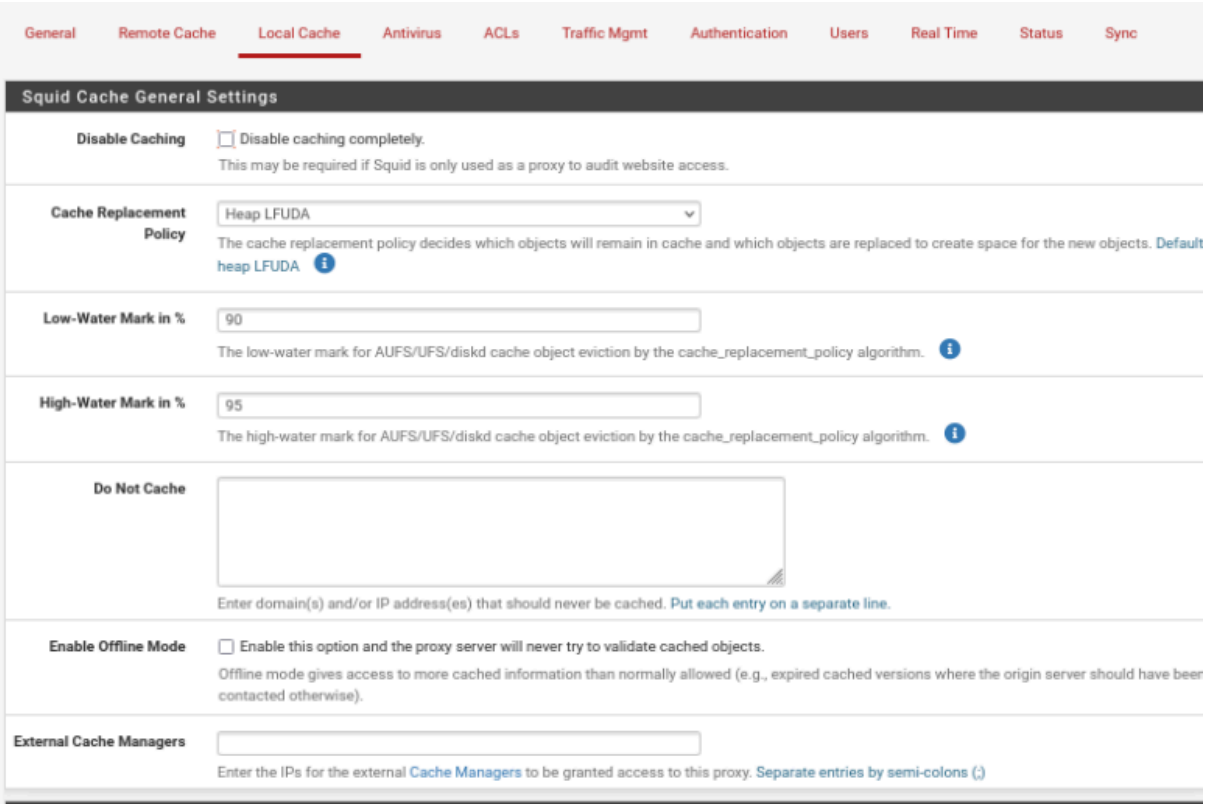

Activation du proxy :



Configuration du filtrage SSL

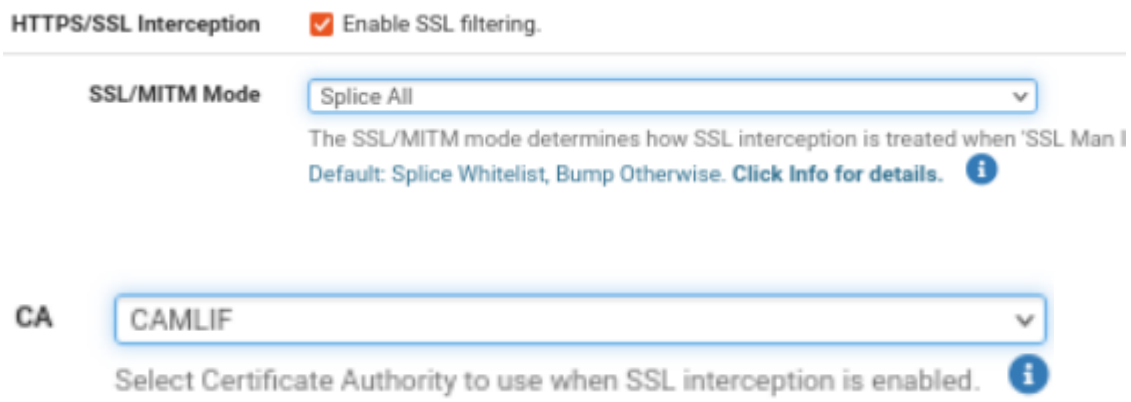

Création des fichiers texte :

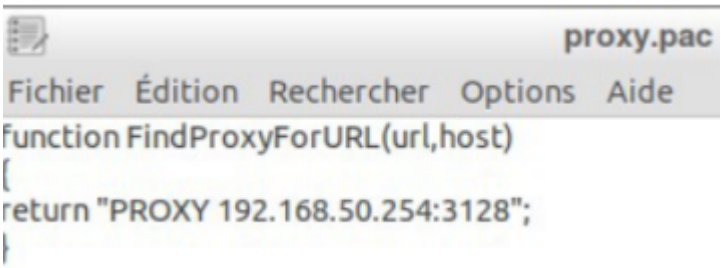

Les uploader sur notre serveur

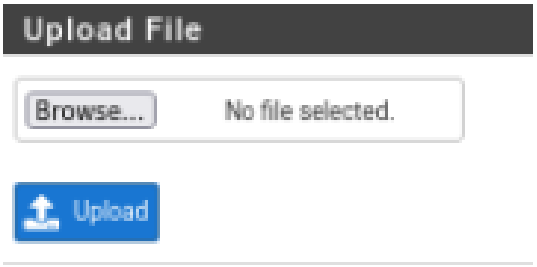

configuration l'accès web pare-feu en HTTP seulement

ajouter une entrée dans la zone directe de notre serveur DNS

```
wpad            IN      A       192.168.50.254
```

```
root@messagelab:~# nslookup wpad.mlif.local
Server:         192.168.100.10
Address:        192.168.100.10#53

Name:   wpad.mlif.local
Address: 192.168.50.254
```

Test proxy :

```
test@client-mlif:~$ wget www.cisco.com
URL transformed to HTTPS due to an HSTS policy
--2025-11-14 16:32:19--  https://www.cisco.com/
Resolving www.cisco.com (www.cisco.com)... 104.116.98.2, 2a02:26f0:9100:f90::b33, 2a02:26f0:
9100:f94::b33
Connecting to www.cisco.com (www.cisco.com)|104.116.98.2|:443... connected.
OpenSSL: error:0A00010B:SSL routines::wrong version number
Unable to establish SSL connection.
```

Echec c'est normal car le proxy bloque

Blacklist :

Blacklist

```
microsoft.com
```

Not Secure http://microsoft.com

ERROR

The requested URL could not be retrieved

The following error was encountered while trying to retrieve the URL: http://microsoft.com/

Access Denied.

Access control configuration prevents your request from being allowed at this time. Please contact your service provider if you feel this is incorrect.

Your cache administrator is admin@localhost.

Generated Fri, 14 Nov 2025 15:36:57 GMT by localhost (squid/5.8)

Désactivation de squid



On active l'option blacklist



On blacklist les catégories suivantes :

Installation et activation Snort

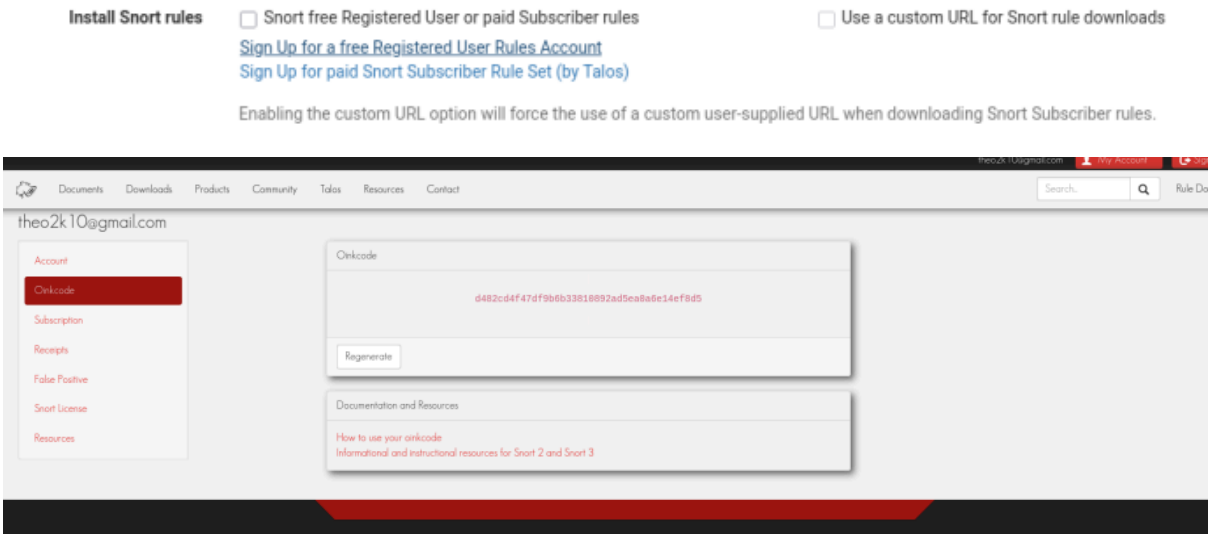

on coche aussi les cases suivantes :
• Enable ET Open ; • Enable OpenAppID ; • Enable RULES OpenAppID ; • Hide Deprecated Rules Category.

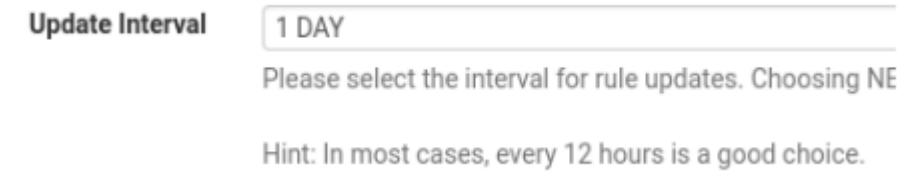

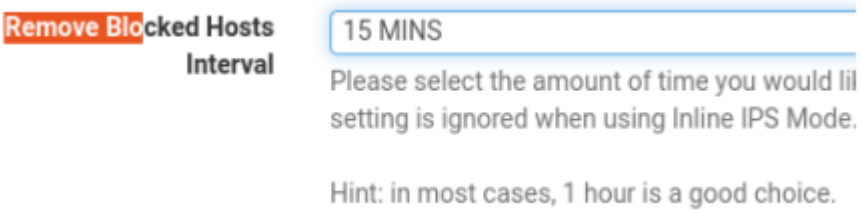

Update des regles
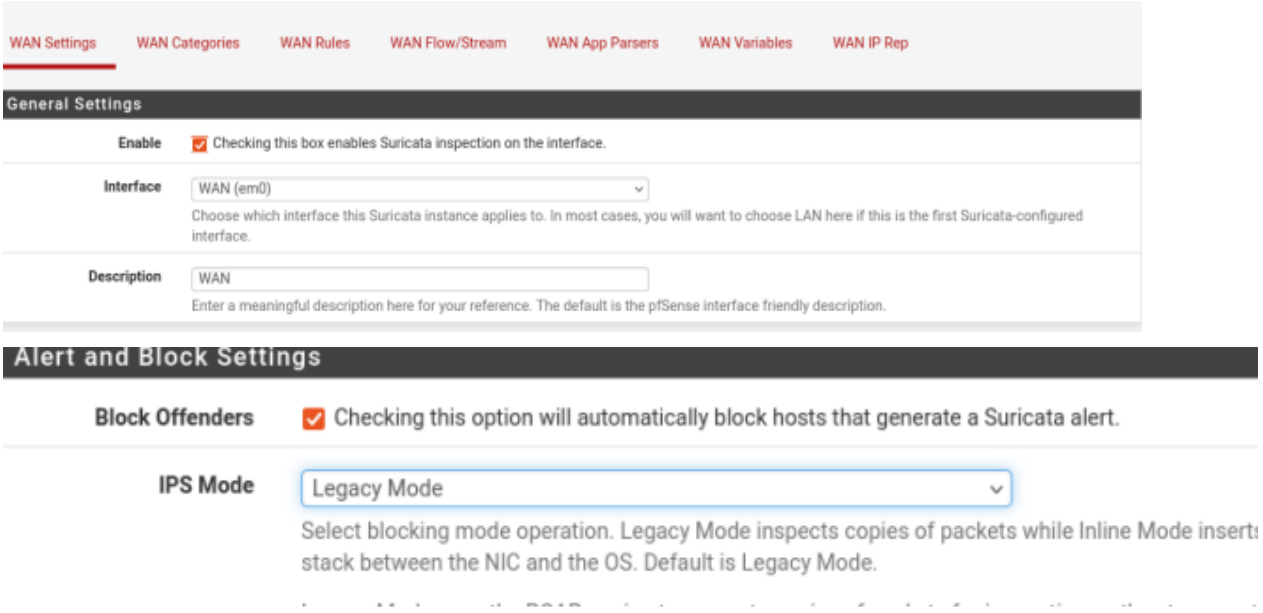
configurer une protection de l'interface WAN afin de prévenir les attaques extérieures