High Performance ISM Band Transceiver IC
ADF7025

FEATURES

Low power, zero-IF RF transceiver
Frequency bands
    431 MHz to 464 MHz
    862 MHz to 870 MHz
    902 MHz to 928 MHz
Data rates supported
    9.6 kbps to 384 kbps, FSK
2.3 V to 3.6 V power supply
Programmable output power
    −16 dBm to +13 dBm in 63 steps
Receiver sensitivity
    −104.2 dBm at 38.4 kbps, FSK
    −100 dBm at 172.8 kbps, FSK
    −95.8 dBm at 384 kbps, FSK
Low power consumption
    19 mA in receive mode
    28 mA in transmit mode (10 dBm output)

On-chip VCO and Fractional-N PLL
On-chip, 7-bit ADC and temperature sensor
Digital RSSI
Integrated TRx switch
Leakage current < 1 µA in power-down mode

APPLICATIONS

Wireless audio/video
Remote control/security systems
Wireless metering
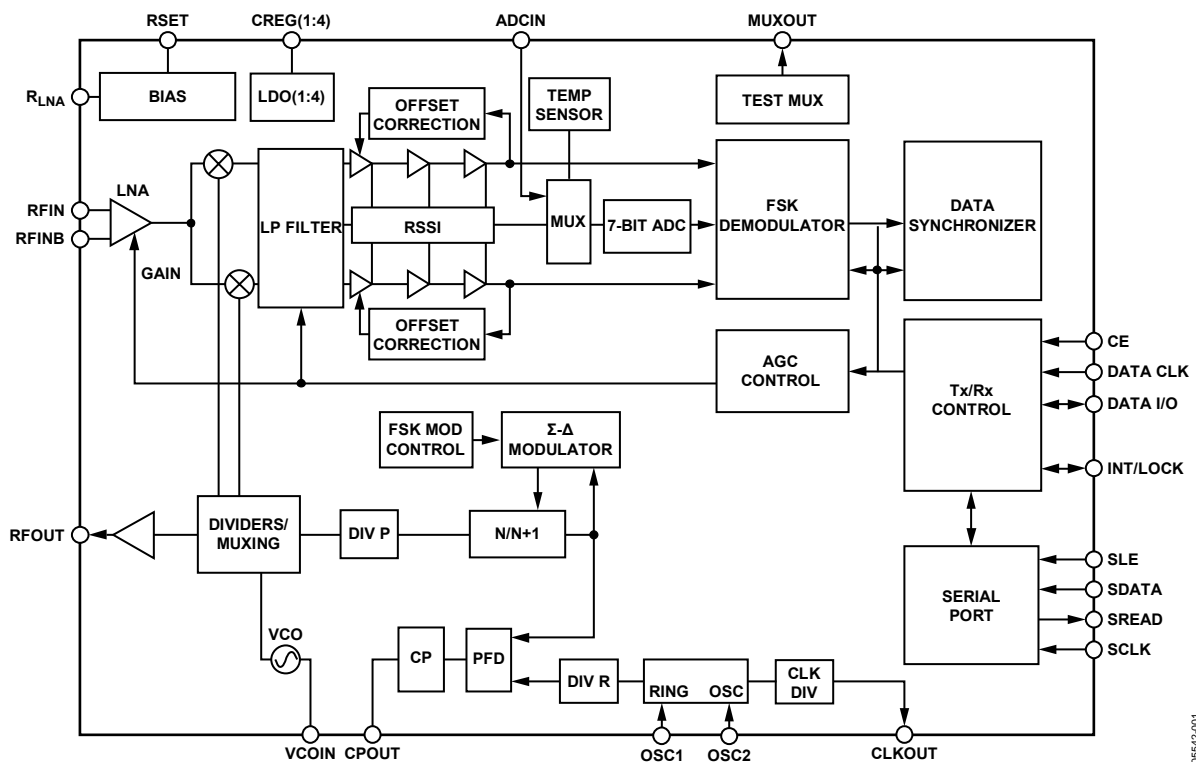Keyless entry
Home automation

FUNCTIONAL BLOCK DIAGRAM

Figure 1.

ADF7025

TABLE OF CONTENTS

REVISION HISTORY

GENERAL DESCRIPTION

The ADF7025 is a low power, highly integrated FSK transceiver. It is designed for operation in the license–free ISM bands of 433 MHz, 863 MHz to 870 MHz, and 902 MHz to 928 MHz. The ADF7025 can be used for applications operating under the European ETSI EN300-220 or the North American FCC (Part 15) regulatory standards. The ADF7025 is intended for wideband, high data rate applications with deviation frequencies from 100 kHz to 750 kHz and data rates from 9.6 kbps to 384 kbps. A complete transceiver can be built using a small number of external discrete components, making the ADF7025 very suitable for price-sensitive and area-sensitive applications.

The transmit section contains a VCO and low noise Fractional-N PLL with output resolution of <1 ppm. The VCO operates at twice the fundamental frequency to reduce spurious emissions and frequency pulling problems.

The transmitter output power is programmable in 0.3 dB steps from −16 dBm to +13 dBm. The transceiver RF frequency, channel spacing, and modulation are programmable using a simple 3-wire interface. The device operates with a power supply range of 2.3 V to 3.6 V and can be powered down when not in use.

A zero-IF architecture is used in the receiver, minimizing power consumption and the external component count, while avoiding the need for image rejection. The baseband filter (low-pass) has programmable bandwidths of ±300 kHz, ±450 kHz, and ±600 kHz. A high-pass pole at ~60 kHz eliminates the problem of dc offsets that is characteristic of zero-IF architecture.

The ADF7025 supports a wide variety of programmable features, including Rx linearity, sensitivity, and filter bandwidth, allowing the user to trade off receiver sensitivity and selectivity against current consumption, depending on the application.

An on-chip ADC provides readback of an integrated temperature sensor, an external analog input, the battery voltage, or the RSSI signal, which provides savings on an ADC in some applications. The temperature sensor is accurate to ±10°C over the full operating temperature range of −40°C to +85°C. This accuracy can be improved by doing a 1-point calibration at room temperature and storing the result in memory.

ADF7025

SPECIFICATIONS

V_{DD} = 2.3 V to 3.6 V, GND = 0 V, $T_A = T_{MIN}$ to T_{MAX}, unless otherwise noted. Typical specifications are at V_{DD} = 3 V, T_A = 25°C. All measurements are performed using the EVAL-ADF7025DB1 using PN9 data sequence, unless otherwise noted.

Table 1.

Parameter	Min	Typ	Max	Unit	Test Conditions
RF CHARACTERISTICS					
Frequency Ranges (Direct Output)	862		870	MHz	VCO adjust = 0, VCO bias = 10
	902		928		VCO adjust = 3, VCO bias = 12
Frequency Ranges (Divide-by-2 Mode)	431		464	MHz	See conditions for direct output
Phase Frequency Detector Frequency	RF/256		24	MHz	
TRANSMISSION PARAMETERS					
Data Rate					
FSK	9.6		384	kbps	
FSK Frequency Deviation	100		311.89	kHz	PFD = 10 MHz, direct output
	100		748.54	kHz	PFD = 24 MHz, direct output
	100		374.27	kHz	PFD =24MHz, divide-by-2 mode
Deviation Frequency Resolution	221			Hz	PFD = 3.625 MHz
Gaussian Filter BT		0.5			
Transmit Power[1]	−20		+13	dBm	V_{DD} = 3.0 V, T_A = 25°C
Transmit Power Variation vs. Temperature		±1		dB	From −40°C to +85°C
Transmit Power Variation vs. V_{DD}		±1		dB	From 2.3 V to 3.6 V at 915 MHz, T_A = 25°C
Transmit Power Flatness		±1		dB	From 902 MHz to 928 MHz, 3 V, T_A = 25°C
Programmable Step Size					
−20 dBm to +13 dBm		0.3125		dB	
Spurious Emissions					
Integer Boundary		−55		dBc	50 kHz loop B/W
Reference		−65		dBc	
Harmonics					
Second Harmonic		−27		dBc	Unfiltered conductive
Third Harmonic		−21		dBc	
All Other Harmonics		−35		dBc	
VCO Frequency Pulling		30		kHz rms	DR = 9.6 kbps
Optimum PA Load Impedance		39 + j61		Ω	FRF = 915 MHz
		48 + j54		Ω	FRF = 868 MHz
		54 + j94		Ω	FRF = 433 MHz
RECEIVER PARAMETERS					
FSK Input Sensitivity					At BER = 1E − 3, FRF = 915 MHz, LNA and PA matched separately[2]
Sensitivity at 38.4 kbps		−104.2		dBm	FDEV = 200 kHz, LPF B/W = ±300kHz
Sensitivity at 172.8 kbps		−100		dBm	FDEV = 200 kHz, LPF B/W = ±450kHz
Sensitivity at 384 kbps		−95.8		dBm	FDEV = 450kHz, LPF B/W = ±600kHz
Baseband Filter (Low-Pass) Bandwidths					Programmable
		±300		kHz	
		±450		kHz	
		±600		kHz	
LNA and Mixer, Input IP3					
Enhanced Linearity Mode		+6.8		dBm	Pin = −20 dBm, 2 CW interferers
Low Current Mode		−3.2		dBm	FRF = 915 MHz, f1 = FRF + 3 MHz
High Sensitivity Mode		−35		dBm	F2 = FRF + 6 MHz, maximum gain
Rx Spurious Emissions[3]			−57	dBm	<1 GHz at antenna input
			−47	dBm	>1 GHz at antenna input

Parameter	Min	Typ	Max	Unit	Test Conditions
CHANNEL FILTERING					
Adjacent Channel Rejection (Offset = ±1 × LP Filter BW Setting)		27		dB	Desired signal (38.4 kbps DR, 200 kHz FDEV, ±300 KHz LP filter B/W) 6 dB above the input sensitivity level, CW interferer power level increased until BER = 10^{-3}
Second Adjacent Channel Rejection (Offset = ±2 × LP Filter BW Setting)		40		dB	
Third Adjacent Channel Rejection (Offset = ±3 × LP Filter BW Setting)		43		dB	
Co-Channel Rejection		−2	+24	dB	Maximum rejection measured with CW interferer at center of channel
Wideband Interference Rejection		70		dB	Swept from 100 MHz to 2 GHz, measured as channel rejection
BLOCKING					Desired signal (38.4 kbps DR, 200 kHz FDEV, ±300 KHz LP filter B/W) 6 dB above the input sensitivity level, CW interferer power level increased until BER = 10^{-3}
±1 MHz		42		dB	
±2 MHz		51		dB	
±10 MHz		64		dB	
Saturation (Maximum Input Level)		12		dBm	FSK mode, BER = 10^{-3}
LNA Input Impedance		24 − j60		Ω	FRF = 915 MHz, RFIN to GND
		26 − j63		Ω	FRF = 868 MHz
		71 − j128		Ω	FRF = 433 MHz
RSSI					
Range at Input		−100 to −36		dBm	
Linearity		±2		dB	
Absolute Accuracy		±3		dB	
Response Time		150		μs	
PHASE-LOCKED LOOP					
VCO Gain		65		MHz/V	902 MHz to 928 MHz band, VCO adjust = 3, VCO_BIAS_SETTING = 12
		83		MHz/V	862 MHz to 870 MHz band, VCO adjust = 0, VCO_BIAS_SETTING = 10
Phase Noise (In-Band)		−89		dBc/Hz	PA = 0 dBm, V_{DD} = 3.0 V, PFD = 10 MHz, FRF = 868 MHz, VCO_BIAS_SETTING = 10
Phase Noise (Out-of-Band)		−110		dBc/Hz	1 MHz offset
Residual FM		128		Hz	From 200 Hz to 20 kHz, FRF = 868MHz
PLL Settling Time		40		μs	Measured for a 10 MHz frequency step to within 5 ppm accuracy, PFD = 20 MHz, LBW = 50kHz
REFERENCE INPUT					
Crystal Reference	3.625		24	MHz	
External Oscillator	3.625		24	MHz	
Load Capacitance		33		pF	
Crystal Start-Up Time		1.0		ms	Using 33 pF load capacitors
Input Level				CMOS levels	
TIMING INFORMATION					
Chip Enabled to Regulator Ready		10		μs	C_{REG} = 100 nF
Crystal Oscillator Startup Time		1		ms	With 19.2 MHz XTAL
Tx to Rx Turnaround Time		150 μs + (5 × T_{BIT})			Time to synchronized data, includes AGC settling

ADF7025

Parameter	Min	Typ	Max	Unit	Test Conditions
LOGIC INPUTS					
Input High Voltage, V_{INH}	$0.7 \times V_{DD}$			V	
Input Low Voltage, V_{INL}			$0.2 \times V_{DD}$	V	
Input Current, I_{INH}/I_{INL}			±1	µA	
Input Capacitance, C_{IN}			10	pF	
Control Clock Input			50	MHz	
LOGIC OUTPUTS					
Output High Voltage, V_{OH}	$DV_{DD} - 0.4$			V	$I_{OH} = 500$ µA
Output Low Voltage, V_{OL}			0.4	V	$I_{OL} = 500$ µA
CLK_{OUT} Rise/Fall			5	ns	
CLK_{OUT} Load			10	pF	
TEMPERATURE RANGE, T_A	−40		+85	°C	
POWER SUPPLIES					
Voltage Supply					
V_{DD}	2.3		3.6	V	All VDD pins must be tied together
Transmit Current Consumption					FRF = 915 MHz, V_{DD} = 3.0 V, PA is matched in to 50 Ω
−20 dBm		14.6		mA	
−10 dBm		15.8		mA	
0 dBm		19.3		mA	
10 dBm		28		mA	
Receive Current Consumption					
Low Current Mode		19		mA	
High Sensitivity Mode		21		mA	
Power-Down Mode					
Low Power Sleep Mode		0.1	1	µA	

[1] Measured as maximum unmodulated power. Output power varies with both supply and temperature.
[2] Sensitivity for combined matching network case is typically 2 dB less than separate matching networks.
[3] Follow the matching and layout guidelines in the LNA/PA Matching section to achieve the relevant FCC/ETSI specifications.

TIMING CHARACTERISTICS

V_{DD} = 3 V ± 10%; VGND = 0 V, T_A = 25°C, unless otherwise noted.

Table 2.

Parameter[1]	Limit at T_{MIN} to T_{MAX}	Unit	Test Conditions/Comments
t_1	<10	ns	SDATA to SCLK setup time
t_2	<10	ns	SDATA to SCLK hold time
t_3	<25	ns	SCLK high duration
t_4	<25	ns	SCLK low duration
t_5	<10	ns	SCLK to SLE setup time
t_6	<20	ns	SLE pulse width
t_8	<25	ns	SCLK to SREAD data valid, readback
t_9	<25	ns	SREAD hold time after SCLK, readback
t_{10}	<10	ns	SCLK to SLE disable time, readback

[1] Guaranteed by design, not production tested.
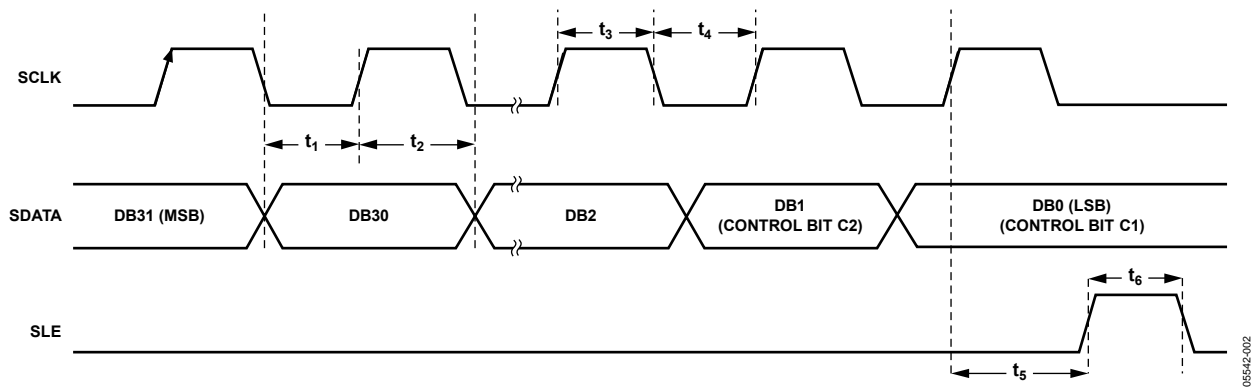
TIMING DIAGRAMS

Figure 2. Serial Interface Timing Diagram
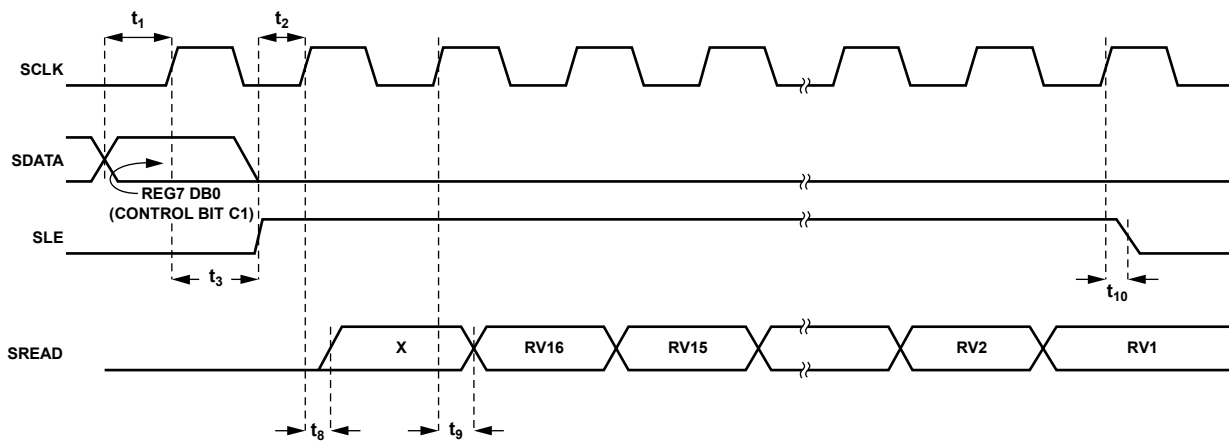
Figure 3. Readback Timing Diagram

ADF7025
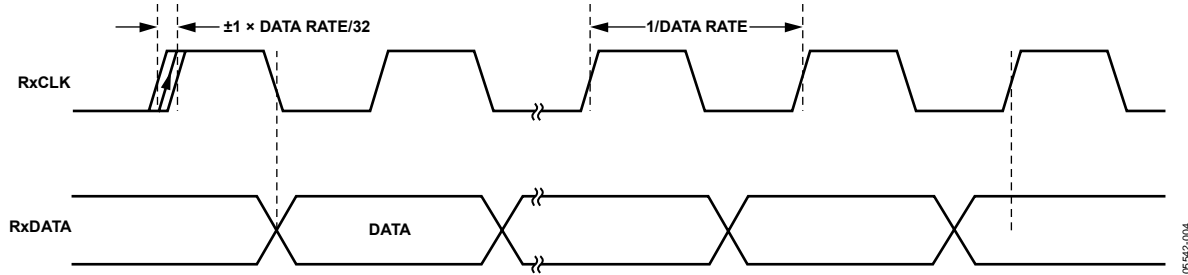
Figure 4. RxData/RxCLK Timing Diagram

ABSOLUTE MAXIMUM RATINGS

$T_A = 25°C$, unless otherwise noted.

Table 3.

Parameter	Rating
V_{DD} to GND[1]	−0.3 V to +5 V
Analog I/O Voltage to GND	−0.3 V to AV_{DD} + 0.3 V
Digital I/O Voltage to GND	−0.3 V to DV_{DD} + 0.3 V
Operating Temperature Range	
Industrial (B Version)	−40°C to +85°C
Storage Temperature Range	−65°C to +125°C
Maximum Junction Temperature	125°C
MLF θ_{JA} Thermal Impedance	26°C/W
Lead Temperature Soldering	
Vapor Phase (60 sec)	235°C
Infrared (15 sec)	240°C

[1] GND = CPGND = RFGND = DGND = AGND = 0 V.

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

This device is a high performance, RF integrated circuit with an ESD rating of <2 kV, and it is ESD sensitive. Proper precautions should be taken for handling and assembly.

ESD CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although this product features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.

PIN CONFIGURATION AND FUNCTION DESCRIPTIONS

Figure 5. Pin Configuration

Table 4. Pin Function Descriptions

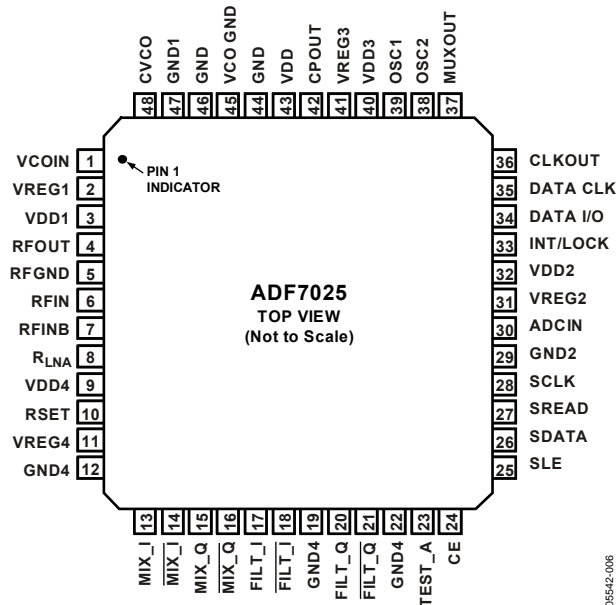| Pin No.	Mnemonic	Description
1	VCOIN	The tuning voltage on this pin determines the output frequency of the voltage-controlled oscillator (VCO). The higher the tuning voltage, the higher the output frequency.
2	VREG1	Regulator Voltage for PA Block. A 100 nF in parallel with a 5.1 pF capacitor should be placed between this pin and ground for regulator stability and noise rejection.
3	VDD1	Voltage Supply for PA Block. Decoupling capacitors of 0.1 μF and 10 pF should be placed as close as possible to this pin. All VDD pins should be tied together.
4	RFOUT	The modulated signal is available at this pin. Output power levels are from −20 dBm to +13 dBm. The output should be impedance-matched to the desired load using suitable components. See the Transmitter section.
5	RFGND	Ground for Output Stage of Transmitter.
6	RFIN	LNA Input for Receiver Section. Input matching is required between the antenna and the differential LNA input to ensure maximum power transfer. See the LNA/PA Matching section.
7	RFINB	Complementary LNA Input. See the LNA/PA Matching section.
8	R_{LNA}	External bias resistor for LNA. Optimum resistor is 1.1 kΩ with 5% tolerance.
9	VDD4	Voltage supply for LNA/MIXER Block. This pin should be decoupled to ground with a 10 nF capacitor.
10	RSET	External Resistor to Set Charge Pump Current and Some Internal Bias Currents. Use 3.6 kΩ with 5% tolerance.
11	VREG4	Regulator Voltage for LNA/MIXER Block. A 100 nF capacitor should be placed between this pin and GND for regulator stability and noise rejection.
12	GND4	Ground for LNA/MIXER Block.
13 to 18	MIX/FILT	Signal Chain Test Pins. These pins are high impedance under normal conditions and should be left unconnected.
19, 22	GND4	Ground for LNA/MIXER Block.
20, 21, 23	FILT/TEST_A	Signal Chain Test Pins. These pins are high impedance under normal conditions and should be left unconnected.
24	CE	Chip Enable. Bringing CE low puts the ADF7025 into complete power-down. Register values are lost when CE is low, and the part must be reprogrammed once CE is brought high.
25	SLE	Load Enable, CMOS Input. When LE goes high, the data stored in the shift registers is loaded into one of the four latches. A latch is selected using the control bits.
26	SDATA	Serial Data Input. The serial data is loaded MSB first with the two LSBs as the control bits. This pin is a high impedance CMOS input.
27	SREAD	Serial Data Output. This pin is used to feed readback data from the ADF7025 to the microcontroller. The SCLK input is used to clock each readback bit (ADC readback) from the SREAD pin.
28	SCLK	Serial Clock Input. This serial clock is used to clock in the serial data to the registers. The data is latched into the 24-bit shift register on the CLK rising edge. This pin is a digital CMOS input.

Pin No.	Mnemonic	Description
29	GND2	Ground for Digital Section.
30	ADCIN	Analog-to-Digital Converter Input. The internal 7-bit ADC can be accessed through this pin. Full scale is 0 V to 1.9 V. Readback is made using the SREAD pin.
31	VREG2	Regulator Voltage for Digital Block. A 100 nF in parallel with a 5.1 pF capacitor should be placed between this pin and ground for regulator stability and noise rejection.
32	VDD2	Voltage Supply for Digital Block. A decoupling capacitor of 10 nF should be placed as close as possible to this pin.
33	INT/LOCK	Bidirectional Pin. In output mode (interrupt mode), the ADF7025 asserts the INT/LOCK pin when it has found a match for the preamble sequence.
		In input mode (lock mode), the microcontroller can be used to lock the demodulator threshold when a valid preamble has been detected. Once the threshold is locked, NRZ data can be reliably received. In this mode, a demodulator lock can be asserted with minimum delay.
34	DATA I/O	Transmit Data Input/Received Data Output. This is a digital pin, and normal CMOS levels apply.
35	DATA CLK	In receive mode, the pin outputs the synchronized data clock. The positive clock edge is matched to the center of the received data.
36	CLKOUT	A Divided-Down Version of the Crystal Reference with Output Driver. The digital clock output can be used to drive several other CMOS inputs, such as a microcontroller clock. The output has a 50:50 mark-space ratio.
37	MUXOUT	This pin provides the lock_detect signal, which is used to determine if the PLL is locked to the correct frequency. Other signals include regulator_ready, which is an indicator of the status of the serial interface regulator.
38	OSC2	The reference crystal should be connected between this pin and OSC1. A TCXO reference can be used by driving this pin with CMOS levels and disabling the crystal oscillator.
39	OSC1	The reference crystal should be connected between this pin and OSC2.
40	VDD3	Voltage Supply for the Charge Pump and PLL Dividers. This pin should be decoupled to ground with a 0.01 μF capacitor.
41	VREG3	Regulator Voltage for Charge Pump and PLL Dividers. A 100 nF in parallel with a 5.1 pF capacitor should be placed between this pin and ground for regulator stability and noise rejection.
42	CPOUT	Charge Pump Output. This output generates current pulses that are integrated in the loop filter. The integrated current changes the control voltage on the input to the VCO.
43	VDD	Voltage Supply for VCO Tank Circuit. This pin should be decoupled to ground with a 0.01 μF capacitor.
44 to 47	GND	Grounds for VCO Block.
48	CVCO	A 22 nF capacitor should be placed between this pin and VREG1 to reduce VCO noise.

TYPICAL PERFORMANCE CHARACTERISTICS

CARRIER POWER 6.11dBm ATTEN 2.00dB MKR1 10.00KHz
REF −60dBc/Hz 10.00dB/ −88.46dBc/Hz
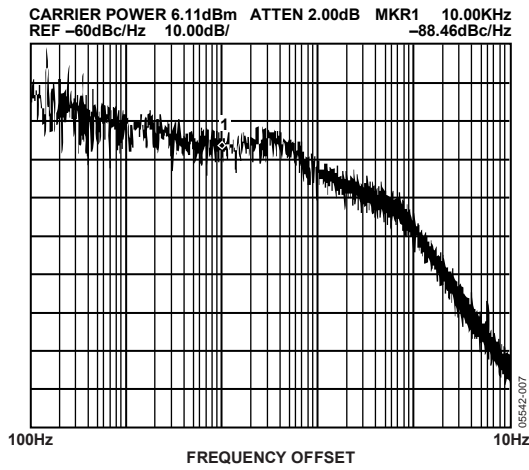
Figure 6. Phase Noise Response at 915 MHz, V_{DD} = 3.0 V, ICP = 0.867 mA

REF 10dBm MKR1 400Hz
NORM LOG 10dB/ ATTEN 20dB 0.69dB

CENTER 915.00MHz VBW 10kHz SPAN 5MHz
#RES BW 10kHz SWEEP 60.32ms (601pts)

Figure 7. Output Spectrum in FSK Modulation (915 MHz, 172.8 kbps Data Rate, 200 kHz Frequency Deviation)

Figure 8. Baseband Filter Response

MKR4 3.482GHz
REF 10dBm ATTEN 20dB SWEEP 16.52ms (601pts)

START 100MHz STOP 10.000GHz
RES BW 3MHz VBW 3MHz SWEEP 16.52ms (601pts)

Figure 9. Harmonic Response, RFOUT Matched to 50 Ω, No Filter

Δ Mkr1 1.834GHz
REF 15dBm ATTEN 30dB −62.57dB

START 800MHz STOP 5.000GHz
#RES BW 30kHz VBW 30kHz SWEEP 5.627s (601pts)

Figure 10. Harmonic Response, Murata Dielectric Filter
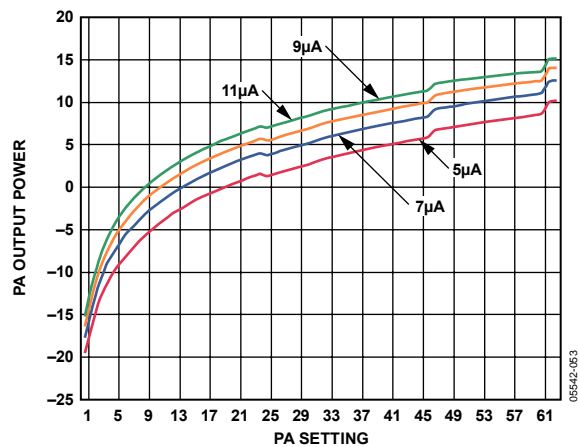
Figure 11. PA Output Power vs. Setting
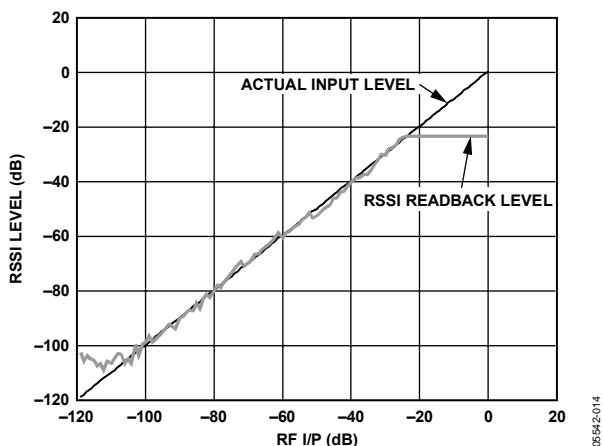
Figure 12. Digital RSSI Readback
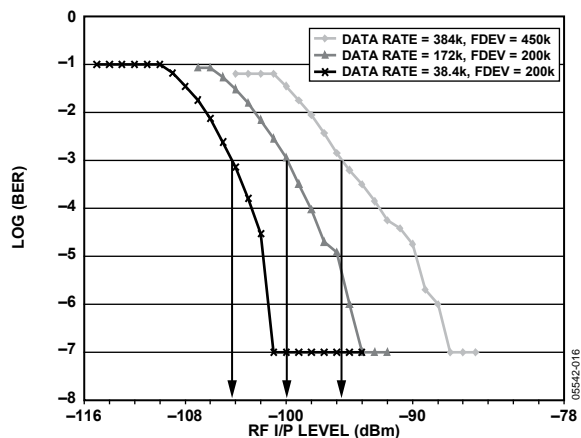
Figure 15. BER vs. Data Rate (Combined Matching Network)
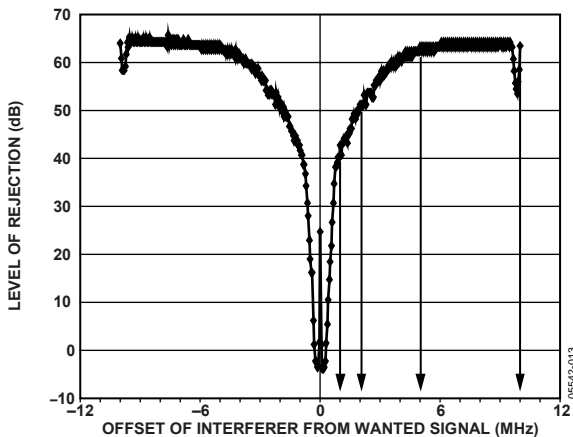
Figure 13. Wideband Interference Rejection;
Wanted Signal (901 MHz, 38.4 kbps Data Rate, 200 kHz Frequency Deviation) at 6 dB Above Sensitivity Point; Interferer = CW Jammer
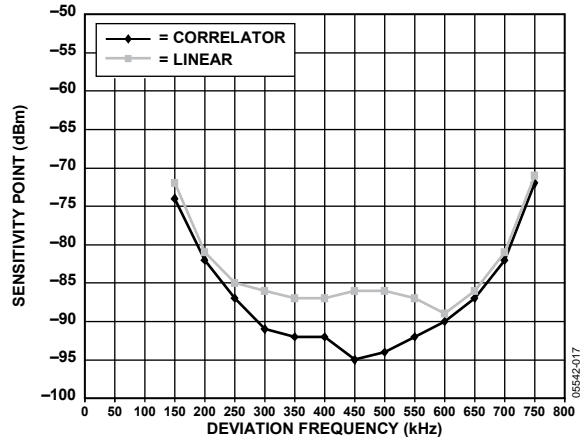
Figure 16. Sensitivity vs. Mod Index (Data Rate = 384 kbps, Baseband Filter Bandwidth = ±600 kHz), for Both Demodulator Types
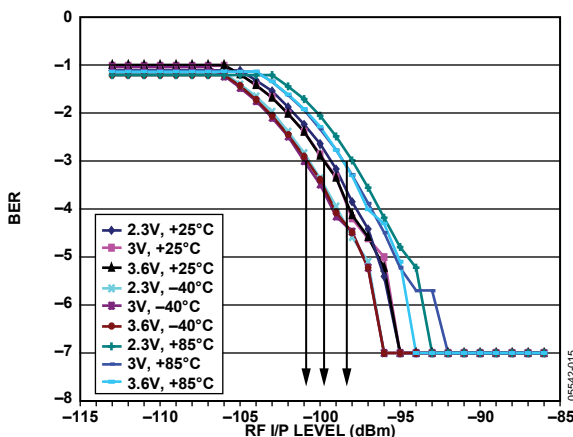
Figure 14. Sensitivity vs. V_{DD} and Temperature
(172.8 kbps Data Rate, 200 kHz Frequency Deviation, Baseband Bandwidth ±600 kHz)
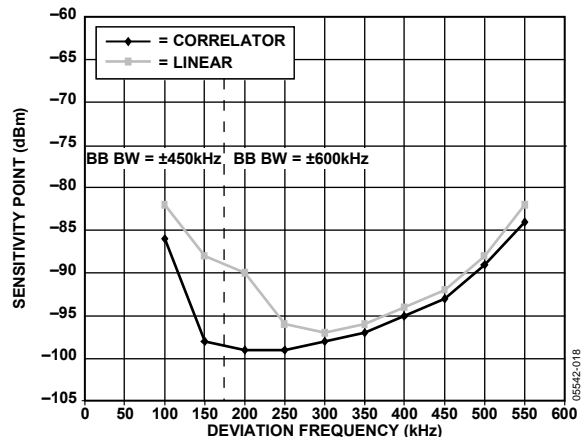
Figure 17. Sensitivity vs. Mod Index (Data Rate = 172.8 kbps), for Both Demodulator Types
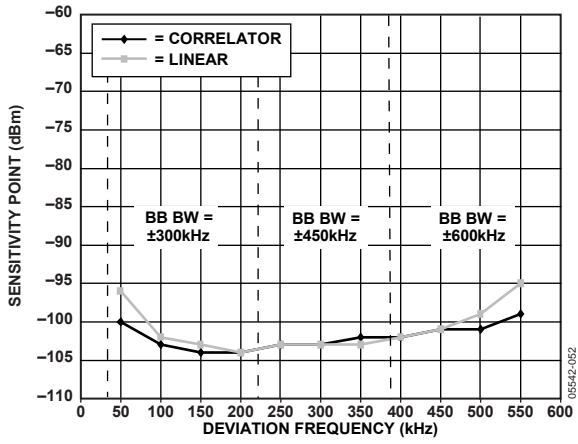
Figure 18. Sensitivity vs. Mod Index (Data Rate = 38.4 kbps),
for both Demodulator Types

FREQUENCY SYNTHESIZER

REFERENCE INPUT SECTION

The on-board crystal oscillator circuitry (see Figure 19) can use an inexpensive quartz crystal as the PLL reference. The oscillator circuit is enabled by setting R1_DB12 high. It is enabled by default on power-up and is disabled by bringing CE low. Errors in the crystal can be corrected by adjusting the Fractional-N value (see the N Counter section). A single-ended reference (TCXO, CXO) can also be used. The CMOS levels should be applied to OSC2 with R1_DB12 set low.

Figure 19. Oscillator Circuit on the ADF7025

Two parallel resonant capacitors are required for oscillation at the correct frequency; their values are dependent on the crystal specification. They should be chosen so that the series value of capacitance added to the PCB track capacitance adds up to the load capacitance of the crystal, usually 20 pF. Track capacitance values vary from 2 pF to 5 pF, depending on board layout. Where possible, choose capacitors that have a very low temperature coefficient to ensure stable frequency operation over all conditions.

CLKOUT Divider and Buffer

The CLKOUT circuit takes the reference clock signal from the oscillator section, shown in Figure 19, and supplies a divided-down 50:50 mark-space signal to the CLKOUT pin. An even divide from 2 to 30 is available. This divide number is set in R1_DB [8:11]. On power-up, the CLKOUT defaults to divide-by-8.
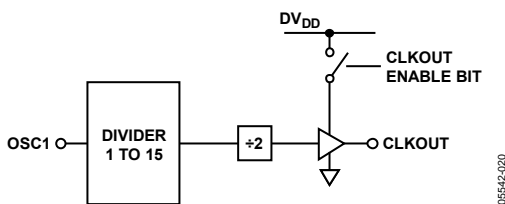
Figure 20. CLKOUT Stage

To disable CLKOUT, set the divide number to 0. The output buffer can drive up to a 20 pF load with a 10% rise time at 4.8 MHz. Faster edges can result in some spurious feedthrough to the output. A small series resistor (50 Ω) can be used to slow the clock edges to reduce these spurs at F_{CLK}.

R Counter

The 3-bit R counter divides the reference input frequency by an integer from 1 to 7. The divided-down signal is presented as the reference clock to the phase frequency detector (PFD). The divide ratio is set in Register 1. Maximizing the PFD frequency reduces the N value. This reduces the noise multiplied at a rate of 20 log(N) to the output, as well as reducing occurrences of spurious components. The R register defaults to R = 1 on power-up.

PFD [Hz] = *XTAL/R*

MUXOUT and Lock Detect

The MUXOUT pin allows the user to access various digital points in the ADF7025. The state of MUXOUT is controlled by Bits R0_DB [29:31].

Regulator Ready

Regulator ready is the default setting on MUXOUT after the transceiver has been powered up. The power-up time of the regulator is typically 50 μs. Because the serial interface is powered from the regulator, the regulator must be at its nominal voltage before the ADF7025 can be programmed. The status of the regulator can be monitored at MUXOUT. When the regulator_ready signal on MUXOUT is high, programming of the ADF7025 can begin.
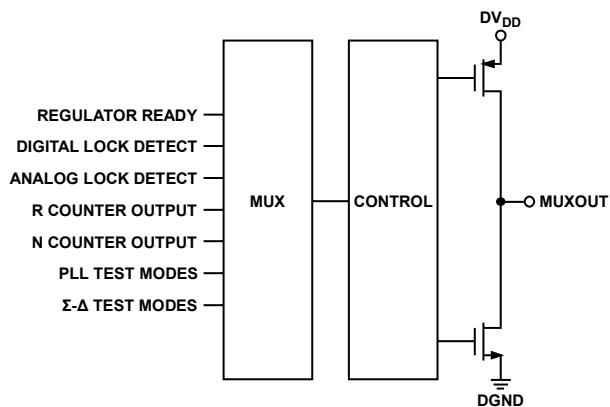
Figure 21. MUXOUT Circuit

Digital Lock Detect

Digital lock detect is active high. The lock detect circuit is located at the PFD. When the phase error on five consecutive cycles is less than 15 ns, lock detect is set high. Lock detect remains high until a 25 ns phase error is detected at the PFD. Because no external components are needed for digital lock detect, it is more widely used than analog lock detect.

ADF7025

Analog Lock Detect

This N-channel open-drain lock detect should be operated with an external pull-up resistor of 10 kΩ nominal. When a lock has been detected, this output is high with narrow low-going pulses.

Voltage Regulators

The ADF7025 contains four regulators to supply stable voltages to the part. The nominal regulator voltage is 2.3 V. Each regulator should have a 100 nF capacitor connected between VREG and GND. When CE is high, the regulators and other associated circuitry are powered on, drawing a total supply current of 2 mA. Bringing the chip-enable pin low disables the regulators, reduces the supply current to less than 1 µA, and erases all values held in the registers. The serial interface operates from a regulator supply; therefore, to write to the part, the user must have CE high and the regulator voltage must be stabilized. Regulator status (VREG4) can be monitored using the regulator ready signal from MUXOUT.

Loop Filter

The loop filter integrates the current pulses from the charge pump to form a voltage that tunes the output of the VCO to the desired frequency. It also attenuates spurious levels generated by the PLL. A typical loop filter design is shown in Figure 22.
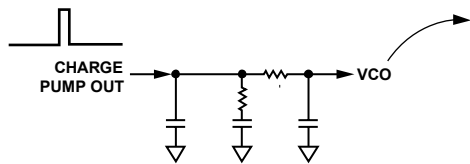
Figure 22. Typical Loop Filter Configuration

In general, a loop filter bandwidth (LBW) of between the data rate and twice the data rate is recommended. Widening the LBW excessively reduces the time spent jumping between frequencies, but it can cause insufficient spurious attenuation. Narrow-loop bandwidths can result in the loop taking long periods of time to attain lock. For the ADF7025 in receive mode, the loop filter bandwidth affects the close-in blocking performance. The narrower the bandwidth of the loop filter, the greater the close-in interference resilience of the receiver.

Careful design of the loop filter is critical to obtaining accurate FSK modulation. The free design tool ADIsimPLL can be used to design loop filters for the ADF7025.

N Counter

The feedback divider in the ADF7025 PLL consists of an 8-bit integer counter and a 14-bit Σ-Δ Fractional-N divider. The integer counter is the standard pulse-swallow type common in PLLs. This sets the minimum integer divide value to 31.

The fractional divide value gives very fine resolution at the output, where the output frequency of the PLL is calculated as

$$F_{OUT} = \frac{XTAL}{R} \times (Integer\ N + \frac{Fractional\ N}{2^{15}})$$
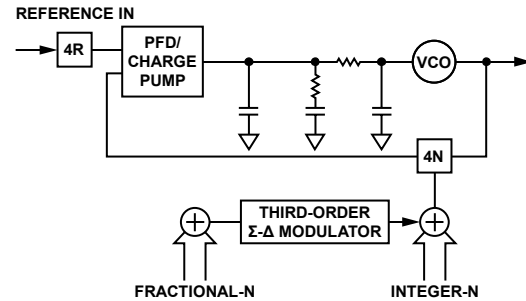
Figure 23. Fractional-N PLL

The combination of the Integer-N (maximum = 255) and the Fractional-N (maximum = 16383/16384) gives a maximum N divider of 255 + 1. Therefore, the minimum usable PFD is

PDF_{MIN} [Hz] = Maximum Required Output Frequency/(255 + 1)

For example, when operating in the European 868 MHz to 870 MHz band, PFD_{MIN} equals 3.4 MHz.

Voltage Controlled Oscillator

To minimize spurious emissions, the on-chip VCO operates from 1732 MHz to 1856 MHz. The VCO signal is then divided by 2 to give the required frequency for the transmitter and the required LO frequency for the receiver.

The VCO should be re-centered, depending on the required frequency of operation, by programming the VCO adjust bits R1_DB [20:21].

For operation in the 862 MHz to 870 MHz band, it is recommended to use a VCO bias of at least Setting 10 and to set the VCO adjust bit to Setting 0. For operation in the 902 MHz to 928 MHz band, it is recommended to use a VCO bias of at least Setting 12 and to set the VCO adjust bit to Setting 3. This is to ensure correct operation under all conditions.

The VCO is enabled as part of the PLL by the PLL-enable bit, R0_DB28.

An additional frequency divide-by-2 is included to allow operation in the lower 431 MHz to 464 MHz bands. To enable operation in these bands, R1_DB13 should be set to 1. The VCO needs an external 22 nF between the VCO and the regulator to reduce internal noise.

VCO Bias Current

VCO bias current can be adjusted using Bit R1_DB19 to Bit R1_DB16. To ensure VCO oscillation under all conditions, the minimum bias current setting is Setting 12 (0xC).

431 MHz to 464 MHz Operation

For operation in the 431 MHz to 464 MHz band, the frequency divide-by-2 has to be enabled. It is enabled by R1_DB13. Because this divide is external to the synthesizer loop, the feedback divider number (N + F) should be programmed to a value twice the desired RF output frequency.
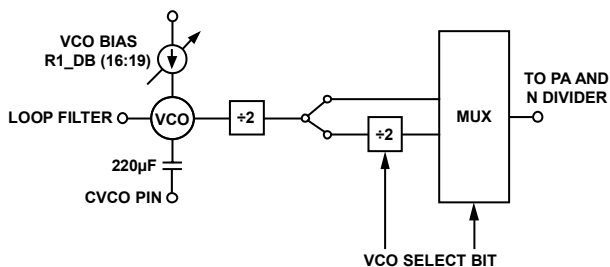
Figure 24. Voltage Controlled Oscillator

CHOOSING CHANNELS FOR BEST SYSTEM PERFORMANCE

The Fractional-N PLL allows the selection of any channel within 862 MHz to 928 MHz (and 431 MHz to 464 MHz using divide-by-2) to a resolution of <300 Hz. This also facilitates frequency-hopping systems.

Careful selection of the RF transmit channels must be made to achieve best spurious performance. The architecture of Fractional-N results in some level of the nearest integer channel moving through the loop to the RF output. These beat-note spurs are not attenuated by the loop, if the desired RF channel and the nearest integer channel are separated by a frequency of less than the LBW.

The occurrence of beat-note spurs is rare, because the integer frequencies are at multiples of the reference, which is typically >10 MHz.

Beat-note spurs can be significantly reduced in amplitude by avoiding very small or very large values in the fractional register, using the frequency doubler. By having a channel 1 MHz away from an integer frequency, a 100 kHz loop filter can reduce the level to less than −45 dBc.

TRANSMITTER

RF OUTPUT STAGE

The PA of the ADF7025 is based on a single-ended, controlled current, open-drain amplifier that has been designed to deliver up to 13 dBm into a 50 Ω load at a maximum frequency of 928 MHz.

The PA output current and, consequently, the output power are programmable over a wide range. The PA configuration is shown in Figure 25. The output power is independent of the state of the DATA I/O pin. The output power is set using Bits R2_DB [9:14].
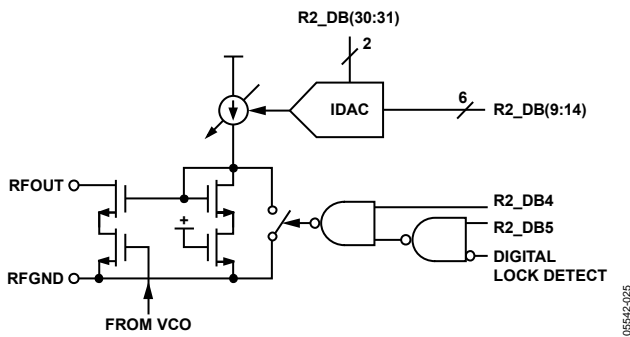
Figure 25. PA Configuration

The PA is equipped with overvoltage protection, which makes it robust in severe mismatch conditions. Depending on the application, one can design a matching network for the PA to exhibit optimum efficiency at the desired radiated output power level for a wide range of different antennas, such as loop or monopole antennas. See the LNA/PA Matching section for details.

PA Bias Currents

Control Bits R2_DB [30:31] facilitate an adjustment of the PA bias current to further extend the output power control range, if necessary. If this feature is not required, the default value of 7 μA is recommended. The output stage is powered down by resetting Bit R2_DB4.

MODULATION SCHEME

Frequency Shift Keying (FSK)

Frequency shift keying is implemented by setting the N value for the center frequency and then toggling this with the TxData line. The deviation from the center frequency is set using Bits R2_DB [15:23]. The deviation from the center frequency in Hz is

$$FSK_{DEVIATION}[\text{Hz}] = \frac{PFD \times Modulation\ Number}{2^{14}}$$

where *Modulation Number* is a number from 1 to 511 (R2_DB(15:23)).

Select FSK using Bits R2_DB [6:8].
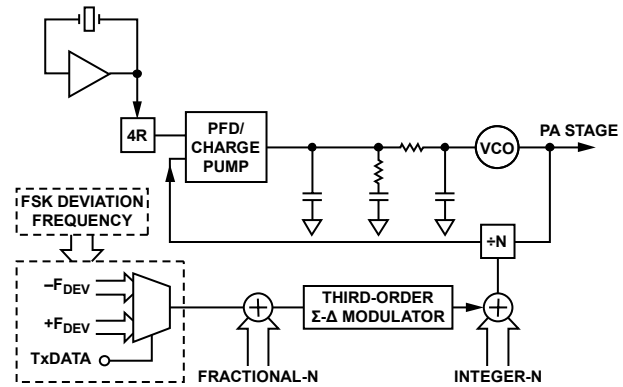
Figure 26. FSK Implementation

Modulation Index

The choice of deviation frequency for a given data rate is critical to get optimum sensitivity performance from the ADF7025. The modulation index (MI) of an FSK modulated signal is defined as

$$MI = \frac{2 \times Frequency\ Deviation\ [\text{Hz}]}{Data\ Rate\ [\text{bps}]}$$

It is recommended to use a MI > 1 for the ADF7025. The variation of receiver sensitivity with modulation index, for various data rates, can be observed in Figure 16, Figure 17, and Figure 18.

RECEIVER

RF FRONT END

The ADF7025 is based on a fully integrated, zero-IF receiver architecture. The zero-IF architecture minimizes power consumption and the external component count while avoiding the need for image rejection.

Figure 27 shows the structure of the receiver front end. The numerous programming options allow users to trade off sensitivity, linearity, and current consumption against each other in the way best suitable for their applications. To achieve a high level of resilience against spurious reception, the LNA features a differential input. Switch SW2 shorts the LNA input when transmit mode is selected (R0_DB27 = 0). This feature facilitates the design of a combined LNA/PA matching network, avoiding the need for an external Rx/Tx switch. See the LNA/PA Matching section for details on the design of the matching network.
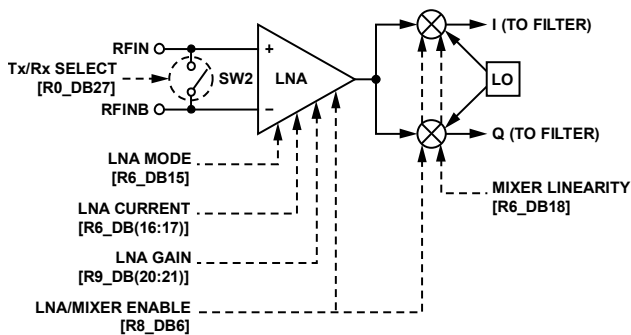
Figure 27. ADF7025 RF Front End

The LNA is followed by a quadrature downconversion mixer, which converts the RF signal direct to baseband. The output frequency of the synthesizer must be programmed to the value equal to the center frequency of the received channel.

The LNA has two basic operating modes: high gain/low noise mode and low gain/low power mode. To switch between the two modes, use the LNA_mode bit, R6_DB15. The mixer is also configurable between a low current and an enhanced linearity mode using the mixer_linearity bit, R6_DB18.

Based on the specific sensitivity and linearity requirements of the application, it is recommended to adjust control bits LNA_mode (R6_DB15) and mixer_linearity (R6_DB18).

The gain of the LNA is configured by the LNA_gain field, R9_DB [20:21] and can be set by either the user or the automatic gain control (AGC) logic.

Filter Settings/Calibration

Out-of-band interference is rejected by means of a fifth-order, low-pass filter (LPF). The bandwidth of the filter can be programmed to be ±300 kHz, ±450 kHz, or ±600 kHz by means of Control Bits R1_DB [22:23] and should be chosen as a compromise between interference rejection and attenuation of the desired signal. A high-pass filter is also included as part of the low-pass filter to prevent against dc offset problems. The bandwidth of this filter is ~60 kHz. To avoid significant loss of FSK modulated signal in the filter, the frequency deviation needs to be significantly larger than this pole (refer to the Modulation Index section). The minimum allowable frequency deviation is 100 kHz.

To compensate for manufacturing tolerances, the LPF should be calibrated once after power-up. The LPF calibration logic requires that the LPF divider in Bits R6_DB [20:28] be set depending on the crystal frequency. Once initiated by setting Bit R6_DB19, the calibration is performed automatically without any user intervention. The calibration time is 200 μs, during which the ADF7025 should not be accessed. It is important not to initiate the calibration cycle before the crystal oscillator has fully settled. If the AGC loop is disabled, the gain of LPF can be set to three levels using the filter_gain field, R9_DB [20:21]. The filter gain is adjusted automatically, if the AGC loop is enabled.

ADF7025

RSSI/AGC

The RSSI is implemented as a successive compression log amp following the baseband channel filtering. The log amp achieves ±3 dB log linearity. It also doubles as a limiter to convert the signal-to-digital levels for the FSK demodulator. Offset correction is achieved using a switched capacitor integrator in feedback around the log amp. This uses the BB offset clock divide. The RSSI level is converted for user readback and digitally controlled AGC by an 80-level (7-bit) flash ADC. This level can be converted to input power in dBm.
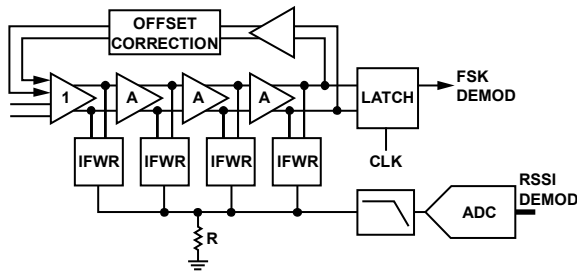
Figure 28. RSSI Block Diagram

Offset Correction Clock

In Register 3, the user should set the BB offset clock divide bits R3_DB [4:5] to give an offset clock between 1 MHz and 2 MHz, where BBOS _CLK [Hz] = XTAL/(BBOS_CLK_DIVIDE).

BBOS_CLK_DIVIDE can be set to 4, 8, or 16.

AGC Information

In Register 9, the user should select automatic gain control by selecting Auto In R9_DB18 and Auto In R9_DB19. The user should then program AGC Low Threshold R9_DB [4:10] and AGC High Threshold R9_DB [11:17]. The default values for the low and high thresholds are 30 and 70, respectively; however, these are not the optimum settings for all operating conditions. The recommended values for the low and high thresholds are 15 and 79, respectively. In the AGC 2 register (Register 10), the user should program the AGC delay to be long enough to allow the loop to settle. The default/recommended value is 10.

$$AGC\_Wait\_Time = \frac{AGC\_DELAY \times SEQ\_CLK\_DIVIDE}{XTAL}$$

AGC Settling = AGC_Wait_Time × Number of Gain Changes

Thus, in the worst case, if the AGC loop has to go through all five gain changes, AGC delay = 10, and SEQ_CLK = 200 kHz, then AGC settling = 10 × 5 μs × 5 = 250 μs. Minimum AGC_Wait_Time must be at least 25 μs.

RSSI Formula (Converting to dBm)

$$Input\_Power \text{ [dBm]} = -98 \text{ dBm} + (Readback\_Code + Gain\_Mode\_Correction) \times 0.5$$

where:

Readback_Code is given by Bit RV7 to Bit RV1 in the readback register (see the Readback Format section).

Gain_Mode_Correction is given by the values in Table 5.

LNA gain and filter gain (LG2/LG1, FG2/FG1) are also obtained from the readback register.

Table 5. Gain Mode Correction

LNA Gain (LG2, LG1)	Filter Gain (FG2, FG1)	Gain Mode Correction
H (11)	H (10)	0
M (10)	H (10)	17
M (10)	M (01)	53
M (10)	L (00)	65
L (01)	L (00)	90
EL (00)	L (00)	113

These numbers are for an unmodulated tone. For a modulated signal, the RSSI readback may have to be adjusted to get the required accuracy. An additional factor should also be introduced to account for losses in the front-end matching network/antenna.

FSK DEMODULATORS ON THE ADF7025

The two FSK demodulators on the ADF7025 are

- FSK correlator/demodulator

- Linear demodulator

Select these using the Demod Select Bits R4_DB [4:5].

FSK CORRELATOR/DEMODULATOR

The quadrature outputs of the IF filter are first limited and then fed to a pair of digital frequency correlators that perform band-pass filtering of the binary FSK frequencies at (IF + F_{DEV}) and (IF − F_{DEV}). Data is recovered by comparing the output levels from each of the two correlators. The performance of this frequency discriminator approximates that of a matched filter detector, which is known to provide optimum detection in the presence of AWGN.
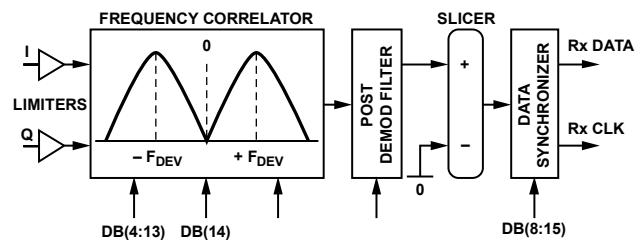
Figure 29. FSK Correlator/Demodulator Block Diagram

Postdemodulator Filter

A second-order, digital low-pass filter removes excess noise from the demodulated bit stream at the output of the discriminator. The bandwidth of this postdemodulator filter is programmable and must be optimized for the user's data rate. If the bandwidth is set too narrow, performance is degraded due to intersymbol interference (ISI). If the bandwidth is set too wide, excess noise degrades the receiver's performance. Typically, the 3 dB bandwidth of this filter is set at approximately 0.75 times the user's data rate, using Bits R4_DB [6:15].

Bit Slicer

The received data is recovered by the threshold detecting the output of the postdemodulator low-pass filter. In the correlator/demodulator, the binary output signal levels of the frequency discriminator are always centered on 0. Therefore, the slicer threshold level can be fixed at 0, and the demodulator performance is independent of the run-length constraints of the transmit data bit stream. This results in robust data recovery, which does not suffer from the classic baseline wander problems that exist in more traditional FSK demodulators.

Data Synchronizer

An oversampled digital PLL is used to resynchronize the received bit stream to a local clock. The oversampled clock rate of the PLL (CDR_CLK) must be set at 32 times the data rate. See the Register 3—Receiver Clock Register section for a definition of how to program. The clock recovery PLL can accommodate frequency errors of up to ±2%.

FSK Correlator Register Settings

To enable the FSK correlator/demodulator, Bits R4_DB [5:4] should be set to 01. To achieve best performance, the bandwidth of the FSK correlator must be optimized for the specific deviation frequency that is used by the FSK transmitter.

The discriminator BW is controlled in Register 6 by R6_DB [4:13] and is defined as

$$Discriminator\_BW = DEMOD\_CLK/(4 \times F_{DEV})$$

where:

$DEMOD\_CLK$ is as defined in the Register 3—Receiver Clock Register section.

F_{DEV} is the deviation from the carrier frequency in FSK modulation.

Postdemodulator Bandwidth Register Settings

The 3 dB bandwidth of the postdemodulator filter is controlled by Bits R4_ DB [6:15] and is given by

$$Post\_Demod\_BW\_Setting = \frac{2^{10} \times 2\pi \times F_{CUTOFF}}{DEMOD\_CLK}$$

where F_{CUTOFF} is the target 3 dB bandwidth in Hz of the post-demodulator filter. This should typically be set to 0.75 times the data rate (DR).

Some sample settings for the FSK correlator/demodulator are

$DEMOD\_CLK$ = 11.0592 MHz
DR = 200 kbps
F_{DEV} = 300 kHz

Therefore,

F_{CUTOFF} = 0.75 × 200 × 10^3 Hz
$Post\_Demod\_BW$ = 2^{11} × π × 150 × 10^3 Hz/(11.0592 MHz)
$Post\_Demod\_BW$ = Round (87.266) = 87

and

$Discriminator\_BW$ = (11.0592 MHz)/(4 × 300 × 10^3) = 9.21 = 9 (rounded to the nearest integer)

Table 6. Register Settings

Setting Name	Register Address	Value
Post_Demod_BW	R4_DB [6:15]	0x09
Discriminator BW	R6_DB [4:13]	0x58

LINEAR FSK DEMODULATOR

A block diagram of the linear FSK demodulator is shown in Figure 30.
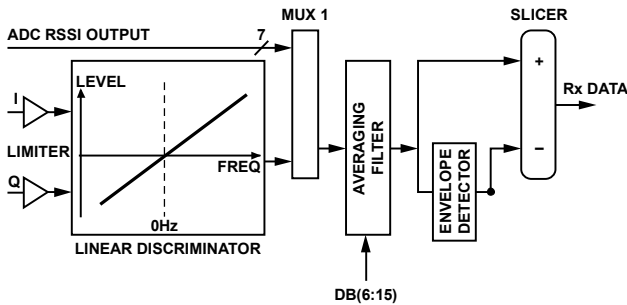
Figure 30. Block Diagram of Linear FSK Demodulator

This method of frequency demodulation is useful when very short preamble length is required.

A digital frequency discriminator provides an output signal that is linearly proportional to the frequency of the limiter outputs. The discriminator output is then filtered and averaged using a combined averaging filter and envelope detector. The demodulated FSK data is recovered by threshold-detecting the output of the averaging filter, as shown in Figure 30. In this mode, the slicer output shown in Figure 30 is routed to the data synchronizer PLL for clock synchronization. To enable the linear FSK demodulator, Bits R4_DB [4:5] are set to [00].

The 3 dB bandwidth of the postdemodulation filter is set in the same way as the FSK correlator/demodulator, which is set in R4_DB(6:15) and is defined as

$$Post\_Demod\_BW\_Setting = \frac{2^{10} \times 2\pi \times F_{CUTOFF}}{DEMOD\_CLK}$$

where:

F_{CUTOFF} is the target 3 dB bandwidth in Hz of the postdemodulator filter.
$DEMOD\_CLK$ is as defined in the Register 3—Receiver Clock Register section.

AUTOMATIC SYNC WORD RECOGNITION

The ADF7025 also supports automatic detection of the sync or ID fields. To activate this mode, the sync (or ID) word must be preprogrammed into the ADF7025. In receive mode, this preprogrammed word is compared to the received bit stream and, when a valid match is identified, the external pin INT/LOCK is asserted by the ADF7025.

This feature can be used to alert the microprocessor that a valid channel has been detected. It relaxes the computational requirements of the microprocessor and reduces the overall power consumption. The INT/LOCK is automatically de-asserted again after nine data clock cycles.

The automatic sync/ID word detection feature is enabled by selecting Demod Mode 2 or Demod Mode 3 in the demodulator setup register. Do this by setting R4_DB [25:23] = [010] or R4_DB [25:23] = [011]. Bits R5_DB [4:5] are used to set the length of the sync/ID word, which can be either 12 bits, 16 bits, 20 bits, or 24 bits long. The transmitter must transmit the MSB of the sync byte first and the LSB last to ensure proper alignment in the receiver sync byte detection hardware.

For systems using FEC, an error tolerance parameter can also be programmed that accepts a valid match when up to three bits of the word are incorrect. The error tolerance value is assigned in R5_DB [6:7].

APPLICATIONS SECTION

LNA/PA MATCHING

The ADF7025 exhibits optimum performance in terms of sensitivity, transmit power, and current consumption only if its RF input and output ports are properly matched to the antenna impedance. For cost-sensitive applications, the ADF7025 is equipped with an internal Rx/Tx switch, which facilitates the use of a simple combined passive PA/LNA matching network. Alternatively, an external Rx/Tx switch, such as the Analog Devices ADG919, can be used, which yields a slightly improved receiver sensitivity and lower transmitter power consumption.

External Rx/Tx Switch

Figure 31 shows a configuration using an external Rx/Tx switch. This configuration allows an independent optimization of the matching and filter network in the transmit and receive path, and is, therefore, more flexible and less difficult to design than the configuration using the internal Rx/Tx switch. The PA is biased through Inductor L1, while C1 blocks dc current. Both elements, L1 and C1, also form the matching network, which transforms the source impedance into the optimum PA load impedance, Z_{OPT_PA}.
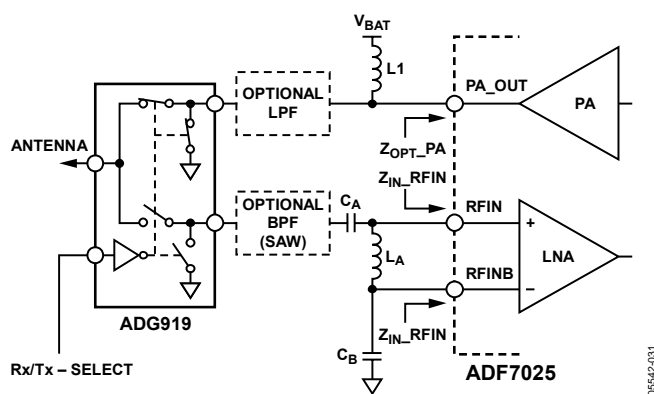
Figure 31. ADF7025 with External Rx/Tx Switch

Z_{OPT_PA} depends on various factors such as the required output power, the frequency range, the supply voltage range, and the temperature range. Selecting an appropriate Z_{OPT_PA} helps to minimize the Tx current consumption in the application. This data sheet contains a number of Z_{OPT_PA} values for representative conditions. Under certain conditions, however, it is recommended to obtain a suitable Z_{OPT_PA} value by means of a load-pull measurement.

Due to the differential LNA input, the LNA matching network must be designed to provide both a single-ended to differential conversion and a complex conjugate impedance match. The network with the lowest component count that can satisfy these requirements is the configuration shown in Figure 31, which consists of two capacitors and one inductor.

A first-order implementation of the matching network can be obtained by understanding the arrangement as two L-type matching networks in a back-to-back configuration. Due to the asymmetry of the network with respect to ground, a compromise between the input reflection coefficient and the maximum differential signal swing at the LNA input must be established. The use of appropriate CAD software is strongly recommended for this optimization.

Depending on the antenna configuration, the user might need a harmonic filter at the PA output to satisfy the spurious emission requirement of the applicable government regulations. The harmonic filter can be implemented in various ways, such as a discrete LC filter or T-stage filter. Dielectric low-pass filter components such as the LFL18924MTC1A052 (for operation in the 915 MHz band), or LFL18869MTC2A160 (for operation in the 868 MHz band), both by Murata Mfg. Co., Ltd., represent an attractive alternative to discrete designs. The immunity of the ADF7025 to strong out-of-band interference can be improved by adding a band-pass filter in the Rx path.

Internal Rx/Tx Switch

Figure 32 shows the ADF7025 in a configuration where the internal Rx/Tx switch is used with a combined LNA/PA matching network. This is the configuration used in the ADF7025DB1 Evaluation Board. For most applications, the slight performance degradation of 1 dB to 2 dB caused by the internal Rx/Tx switch is acceptable, allowing the user to take advantage of the cost-saving potential of this solution. The design of the combined matching network must compensate for the reactance presented by the networks in the Tx and the Rx paths, taking the state of the Rx/Tx switch into consideration.
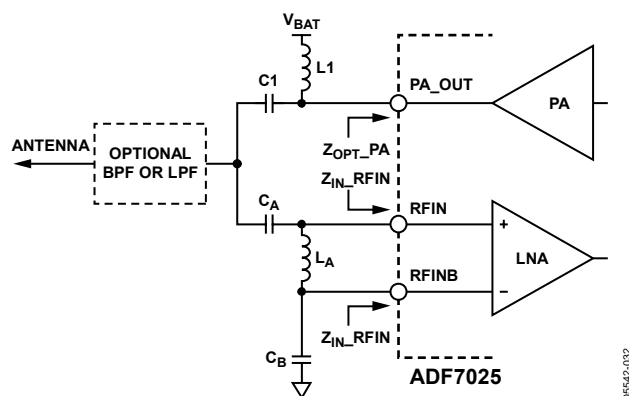
Figure 32. ADF7025 with Internal Rx/Tx Switch

The procedure typically requires several iterations until an acceptable compromise is reached. The successful implementation of a combined LNA/PA matching network for the ADF7025 is critically dependent on the availability of an accurate electrical model for the PC board. In this context, the use of a suitable CAD package is strongly recommended. To avoid this effort, however, a small form-factor reference design for the ADF7025 is provided, including matching and harmonic filter components. The design is on a 2-layer PCB to minimize cost. Gerber files are available on the www.analog.com website.

TRANSMIT PROTOCOL AND CODING CONSIDERATIONS

PREAMBLE	SYNC WORD	ID FIELD	DATA FIELD	CRC

Figure 33. Typical Format of a Transmit Protocol

A dc-free preamble pattern is recommended for FSK demodulation. The recommended preamble pattern is a dc-free pattern such as a 10101010… pattern. Preamble patterns with longer run-length constraints such as 11001100…. can also be used. However, this results in a longer synchronization time of the received bit stream in the receiver.

Manchester coding can be used for the entire transmit protocol. However, the remaining fields that follow the preamble header do not have to use dc-free coding. For these fields, the ADF7025 can accommodate coding schemes with a run-length of up to six bits without any performance degradation.

If longer run-length coding must be supported, the ADF7025 has several other features that can be activated. These involve a range of programmable options that allow the envelope detector output to be frozen after preamble acquisition.

DEVICE PROGRAMMING AFTER INITIAL POWER-UP

Table 7 lists the minimum number of writes needed to set up the ADF7025 in either Tx or Rx mode after CE is brought high. Additional registers can also be written to tailor the part to a particular application, such as setting up sync byte detection. When going from Tx to Rx or vice versa, the user needs to write only to the N register to alter the LO by 200 kHz and to toggle the Tx/Rx bit.

Table 7. Minimum Register Writes Required for Tx/Rx Setup

Mode	Registers					
Tx	0	1	2			
Rx (FSK)	0	1	2	4	6	9[1]
Tx to Rx and Rx to Tx	0					

[1] Register 9 should be programmed in receive mode in order to set the recommended AGC threshold settings (low = 15, high = 79).

Figure 36 and Figure 37 show the recommended programming sequence and associated timing for power-up from standby mode.

INTERFACING TO MICROCONTROLLER/DSP

Low level device drivers are available for interfacing to the ADF7025, the ADI ADuC84x microcontroller parts, or the Blackfin® BF53x DSPs using the hardware connections shown in Figure 34 and Figure 35.
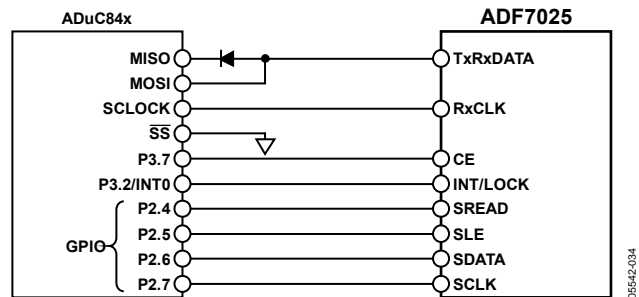
Figure 34. ADuC84X to ADF7025 Connection Diagram
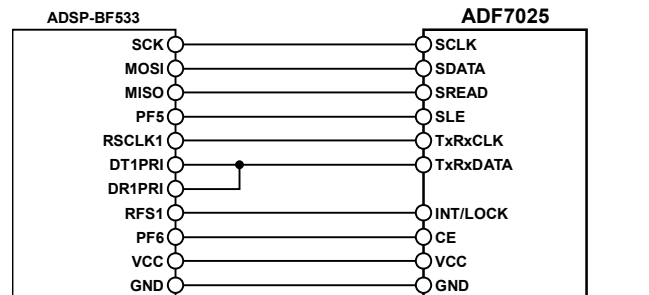
Figure 35. BF533 to ADF7025 Connection Diagram
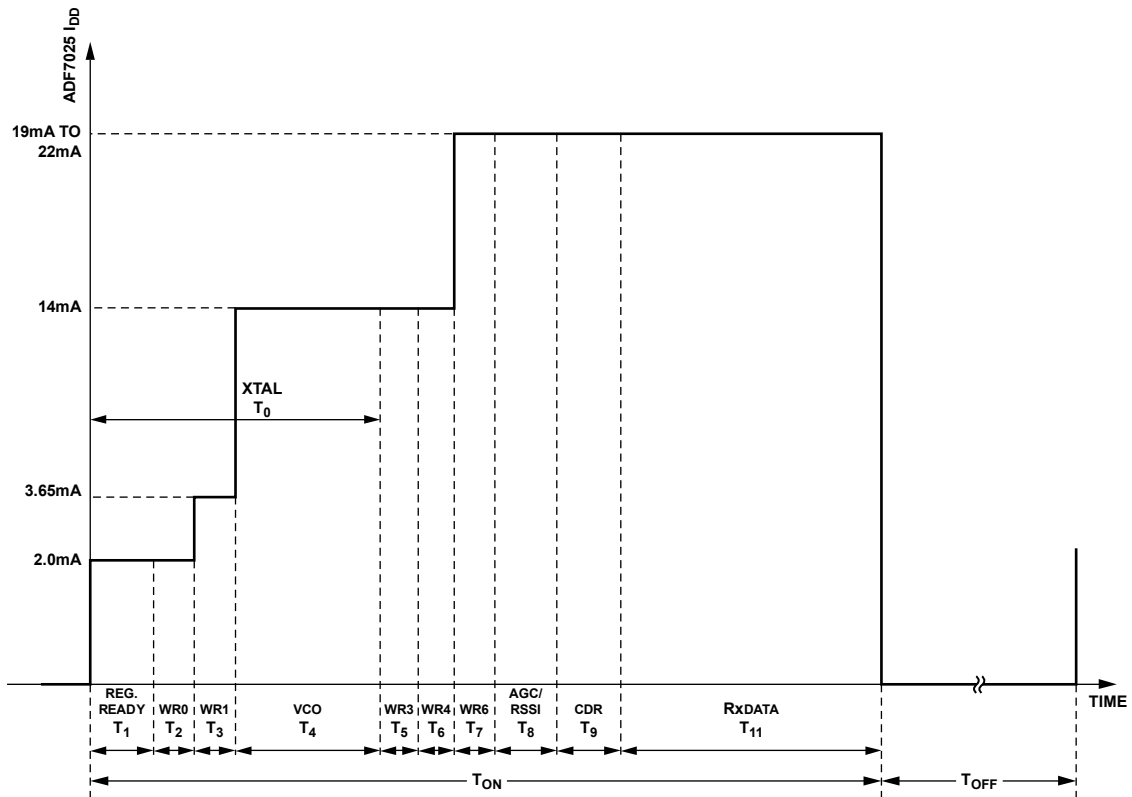
Figure 36. Rx Programming Sequence and Timing Diagram

Table 8. Power-Up Sequence Description

Parameter	Value	Description/Notes	Signal to Monitor
T_0	2 ms	XTAL starts power-up after CE is brought high. This typically depends on the XTAL type and the load capacitance specified.	CLKOUT
T_1	10 μs	Time for regulator to power up. The serial interface can be written to after this time.	MUXOUT
T_2, T_3, T_5, T_6, T_7	32 × 1/SPI_CLK	Time to write to a single register. Maximum SPI_CLK is 25 MHz.	
T_4	1 ms	The VCO can power-up in parallel with the XTAL. This depends on the CVCO capacitance value used. A value of 22 nF is recommended as a trade-off between phase noise performance and power-up time.	CVCO pin
T_8	150 μs	This depends on the number of gain changes the AGC loop needs to cycle through and AGC settings programmed. This is described in more detail in the AGC Information section.	Analog RSSI on TEST_A pin
T_9	5 × bit_period	This is the time for the clock and data recovery circuit to settle. This typically requires 5-bit transitions to acquire sync and is usually covered by the preamble.	
T_{11}	Packet length	Number of bits in payload by the bit period.	

Figure 37. Tx Programming Sequence and Timing Diagram

REGISTERS

REGISTER 0—N REGISTER

MUXOUT			PLL ENABLE	Tx/Rx	8-BIT INTEGER-N									15-BIT FRACTIONAL-N																ADDRESS BITS			
DB31	DB30	DB29	DB28	DB27	DB26	DB25	DB24	DB23	DB22	DB21	DB20	DB19	DB18	DB17	DB16	DB15	DB14	DB13	DB12	DB11	DB10	DB9	DB8	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
M3	M2	M1	PLE1	TR1	N8	N7	N6	N5	N4	N3	N2	N1	M15	M14	M13	M12	M11	M10	M9	M8	M7	M6	M5	M4	M3	M2	M1	C4 (0)	C3 (0)	C2 (0)	C1 (0)

TR1	TRANSMIT/ RECEIVE
0	TRANSMIT
1	RECEIVE

PLE1	PLL ENABLE
0	PLL OFF
1	PLL ON

M3	M2	M1	MUXOUT
0	0	0	REGULATOR READY (DEFAULT)
0	0	1	R DIVIDER OUTPUT
0	1	0	N DIVIDER OUTPUT
0	1	1	DIGITAL LOCK DETECT
1	0	0	ANALOG LOCK DETECT
1	0	1	THREE-STATE
1	1	0	PLL TEST MODES
1	1	1	Σ-Δ TEST MODES

M15	M14	M13	...	M3	M2	M1	FRACTIONAL DIVIDE RATIO
0	0	0	...	0	0	0	0
0	0	0	...	0	0	1	1
0	0	0	...	0	1	0	2
.	.	.	...	.	.	.	.
.	.	.	...	.	.	.	.
.	.	.	...	.	.	.	.
1	1	1	...	1	0	0	32764
1	1	1	...	1	0	1	32765
1	1	1	...	1	1	0	32766
1	1	1	...	1	1	1	32767

N8	N7	N6	N5	N4	N3	N2	N1	N COUNTER DIVIDE RATIO
0	0	0	1	1	1	1	1	31
0	0	1	0	0	0	0	0	32
.	.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.	.
1	1	1	1	1	1	0	1	253
1	1	1	1	1	1	1	0	254
1	1	1	1	1	1	1	1	255

Figure 39. Register 0—N Register

05542-039

Register 0—N Register Comments

- The Tx/Rx bit (R0_DB27) configures the part in Tx or Rx mode and also controls the state of the internal Tx/Rx switch.

- $$F_{OUT} = \frac{XTAL}{R} \times (Integer\ N + \frac{Fractional\ N}{2^{15}})$$

- If operating in 433 MHz band with the VCO band bit set, the desired frequency, F_{OUT}, should be programmed to be twice the desired operating frequency, due to removal of the divide-by-2 stage in feedback path.

REGISTER 1—OSCILLATOR/FILTER REGISTER

IF FILTER BW		VCO ADJUST		VCO BIAS				CP CURRENT		VCO BAND	XOSC ENABLE	CLOCKOUT DIVIDE				XTAL DOUBLER	R COUNTER			ADDRESS BITS			
DB23	DB22	DB21	DB20	DB19	DB18	DB17	DB16	DB15	DB14	DB13	DB12	DB11	DB10	DB9	DB8	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
IR2	IR1	VA2	VA1	VB4	VB3	VB2	VB1	DD2	DD1	V1	X1	CL4	CL3	CL2	CL1	D1	R3	R2	R1	C4 (0)	C3 (0)	C2 (0)	C1 (1)

VA2	VA1	FREQUENCY OF OPERATION
0	0	850–920
0	1	860–930
1	0	870–940
1	1	880–950

X1	XTAL OSC
0	OFF
1	ON

V1	VCO BAND (MHz)
0	862–956
1	431–478

R3	R2	R1	RF R COUNTER DIVIDE RATIO
0	0	1	1
0	1	0	2
.	.	.	.
.	.	.	.
.	.	.	.
1	1	1	7

VB4	VB3	VB2	VB1	VCO BIAS CURRENT
0	0	0	1	0.25mA
0	0	1	0	0.5mA
.	.	.	.	
1	1	1	1	4mA

D1	XTAL DOUBLER
0	DISABLE
1	ENABLED

IR2	IR1	FILTER BANDWIDTH
0	0	600kHz
0	1	900kHz
1	0	1200kHz
1	1	NOT USED

CP2	CP1 RSET	I_{CP}(MA) 3.6kΩ
0	0	0.3
0	1	0.9
1	0	1.5
1	1	2.1

CL4	CL3	CL2	CL1	CLK_{OUT} DIVIDE RATIO
0	0	0	0	OFF
0	0	0	1	2
0	0	1	0	4
.	.	.	.	.
.	.	.	.	.
.	.	.	.	.
1	1	1	1	30

Figure 40. Register 1—Oscillator/Filter Register

Register 1—Oscillator/Filter Register Comments

- The VCO Adjust Bits R1_DB[20:21] should be set to 0 for operation in the 862 MHz to 870 MHz band and set to 3 for operation in the 902 MHz to 928 MHz band.

- VCO bias setting should be 0xA for operation in the 862 MHz to 870 MHz band and 0xC for operation in the 902 MHz to 928 MHz band. All VCO gain numbers are specified for these settings.

REGISTER 2—TRANSMIT MODULATION REGISTER

PA BIAS		TxDATA INVERT	INDEX COUNTER		GFSK MOD CONTROL			MODULATION PARAMETER									POWER AMPLIFIER						MODULATION SCHEME			MUTE PA UNTIL LOCK	PA ENABLE	ADDRESS BITS			
DB31	DB30	DB29	DB28	DB27	DB26	DB25	DB24	DB23	DB22	DB21	DB20	DB19	DB18	DB17	DB16	DB15	DB14	DB13	DB12	DB11	DB10	DB9	DB8	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
PA2	PA1	DI1	IC2	IC1	MC3	MC2	MC1	D9	D8	D7	D6	D5	D4	D3	D2	D1	P6	P5	P4	P3	P2	P1	S3	S2	S1	MP1	PE1	C4 (0)	C3 (0)	C2 (1)	C1 (0)

IC2	IC1	MC3	MC2	MC1
X	X	X	X	X

DI1	
0	TxDATA
1	TxDATA

PA2	PA1	PA BIAS
0	0	5μA
0	1	7μA
1	0	9μA
1	1	11μA

FOR FSK MODE,

D9	....	D3	D2	D1	F DEVIATION
0	....	0	0	0	PLL MODE
0	....	0	0	1	1 × F_{STEP}
0	....	0	1	0	2 × F_{STEP}
0	....	0	1	1	3 × F_{STEP}
.	....	.	.	.	.
1	....	1	1	1	511 × F_{STEP}

PE1	POWER AMPLIFIER
0	OFF
1	ON

MP1	MUTE PA UNTIL LOCK DETECT HIGH
0	OFF
1	ON

S3	S2	S1	MODULATION SCHEME
0	0	0	FSK
X	X	X	INVALID

POWER AMPLIFIER OUTPUT LEVEL

P6	.	.	P2	P1	
0	.	.	X	X	PA OFF
0	.	.	0	0	−16.0dBm
0	.	.	0	1	−16 + 0.45dBm
0	.	.	1	0	−16 + 0.90dBm
.	.	.	.	.	.
1	1	.	1	1	13dBm

05542-041

Figure 41. Register 2—Transmit Modulation Register

Register 2—Transmit Modulation Register Comments

- $F_{STEP} = PFD/12^{14}$.

- When operating in the 431 MHz to 464 MHz band, $F_{STEP} = PFD/12^{15}$.

- PA bias default = 9 μA.

REGISTER 3—RECEIVER CLOCK REGISTER

																DEMOD CLOCK DIVIDE	BB OFFSET CLOCK DIVIDE	ADDRESS BITS			
		SEQUENCER CLOCK DIVIDE								CDR CLOCK DIVIDE											
DB23	DB22	DB21	DB20	DB19	DB18	DB17	DB16	DB15	DB14	DB13	DB12	DB11	DB10	DB9	DB8	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
SK8	SK7	SK6	SK5	SK4	SK3	SK2	SK1	FS8	FS7	FS6	FS5	FS4	FS3	FS2	FS1	OK2	OK1	BK2	BK1	C4(0)	C3(0)	C2(1)	C1(1)

SK8	SK7	...	SK3	SK2	SK1	SEQ_CLK_DIVIDE
0	0	···	0	0	1	1
0	0	···	0	1	0	2
.	.	.	.	.	.	.
1	1	···	1	1	0	254
1	1	···	1	1	1	255

BK2	BK1	BBOS_CLK_DIVIDE
0	0	4
0	1	8
1	x	16

OK2	OK1	DEMOD_CLK_DIVIDE
0	0	4
0	1	1
1	0	2
1	1	3

FS8	FS7	...	FS3	FS2	FS1	CDR_CLK_DIVIDE
0	0	...	0	0	1	1
0	0	...	0	1	0	2
.	.	...	.	.	.	.
1	1	...	1	1	0	254
1	1	...	1	1	1	255

Figure 42. Register 3—Receiver Clock Register

Register 3—Receiver Clock Register Comments

- Baseband offset clock frequency (BBOS_CLK) must be greater than 1 MHz and less than 2 MHz, where:

$$BBOS\_CLK = \frac{XTAL}{BBOS\_CLK\_DIVIDE}$$

- The demodulator clock (DEMOD_CLK) must be < 12 MHz, where:

$$DEMOD\_CLK = \frac{XTAL}{DEMOD\_CLK\_DIVIDE}$$

- Data/clock recovery frequency (CDR_CLK) should be within 2% of (32 × data rate), where:

$$CDR\_CLK = \frac{DEMOD\_CLK}{CDR\_CLK\_DIVIDE}$$

Note that this can affect the choice of XTAL, depending on the desired data rate.

- The sequencer clock (SEQ_CLK) supplies the clock to the digital receive block. It should be close to 100 kHz.

$$SEQ\_CLK = \frac{XTAL}{SEQ\_CLK\_DIVIDE}$$

ADF7025

REGISTER 4—DEMODULATOR SETUP REGISTER

						DEMOD LOCK/ SYNC WORD MATCH		DEMODULATOR LOCK SETTING								POSTDEMODULATOR BW										DEMOD SELECT		ADDRESS BITS			
DB31	DB30	DB29	DB28	DB27	DB26	DB25	DB24	DB23	DB22	DB21	DB20	DB19	DB18	DB17	DB16	DB15	DB14	DB13	DB12	DB11	DB10	DB9	DB8	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
						LM2	LM1	DL8	DL7	DL6	DL5	DL4	DL3	DL2	DL1	DW10	DW9	DW8	DW7	DW6	DW5	DW4	DW3	DW2	DW1	DS2	DS1	C4(0)	C3(1)	C2(0)	C1(0)

DS2	DS1	DEMODULATOR TYPE
0	0	LINEAR DEMODULATOR
0	1	CORRELATOR/DEMODULATOR
1	0	INVALID
1	1	INVALID

DEMOD MODE	LM2	LM1	DL8	DEMOD LOCK/SYNC WORD MATCH	INT/LOCK PIN
0	0	0	0	SERIAL PORT CONTROL – FREE RUNNING	–
1	0	0	1	SERIAL PORT CONTROL – LOCK THRESHOLD	–
2	0	1	0	SYNC WORD DETECT – FREE RUNNING	OUTPUT
3	0	1	1	SYNC WORD DETECT – LOCK THRESHOLD	OUTPUT
4	1	0	X	INTERRUPT/LOCK PIN LOCKS THRESHOLD	INPUT
5	1	1	DL8	DEMOD LOCKED AFTER DL8–DL1 BITS	–

MODE5 ONLY

DL8	DL7	...	DL3	DL2	DL1	LOCK_THRESHOLD_TIMEOUT
0	0	...	0	0	0	0
0	0	...	0	0	1	1
0	0	...	0	1	0	2
.	.	...	.	.	.	.
1	1	...	1	1	0	254
1	1	...	1	1	1	255

Figure 43. Register 4—Demodulator Setup Register

Register 4—Demodulator Setup Register Comments

- Demodulator Mode 1, Demodulator Mode 3, Demodulator Mode 4, and Demodulator Mode 5 are modes that can be activated to allow the ADF7025 to demodulate data-encoding schemes that have run-length constraints greater than 7.

- $Post\_Demod\_BW = \dfrac{2^{11} \times \pi \times F_{CUTOFF}}{DEMOD\_CLK}$, where the cutoff frequency (F_{CUTOFF}) of the postdemodulator filter should typically be 0.75 times the data rate.

- For Mode 5, the *Timeout Delay to Lock Threshold* = (*LOCK_THRESHOLD_SETTING*)/*SEQ_CLK*, where *SEQ_CLK* is defined in the Register 3—Receiver Clock Register section.

REGISTER 5—SYNC BYTE REGISTER

SYNC BYTE SEQUENCE																								MATCHING TOLERANCE		SYNC BYTE LENGTH		CONTROL BITS			
DB31	DB30	DB29	DB28	DB27	DB26	DB25	DB24	DB23	DB22	DB21	DB20	DB19	DB18	DB17	DB16	DB15	DB14	DB13	DB12	DB11	DB10	DB9	DB8	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
																								MT2	MT1	PL2	PL1	C4(0)	C3(1)	C2(0)	C1(1)

PL2	PL1	SYNC BYTE LENGTH
0	0	12 BITS
0	1	16 BITS
1	0	20 BITS
1	1	24 BITS

MT2	MT1	MATCHING TOLERANCE
0	0	0 ERRORS
0	1	1 ERROR
1	0	2 ERRORS
1	1	3 ERRORS
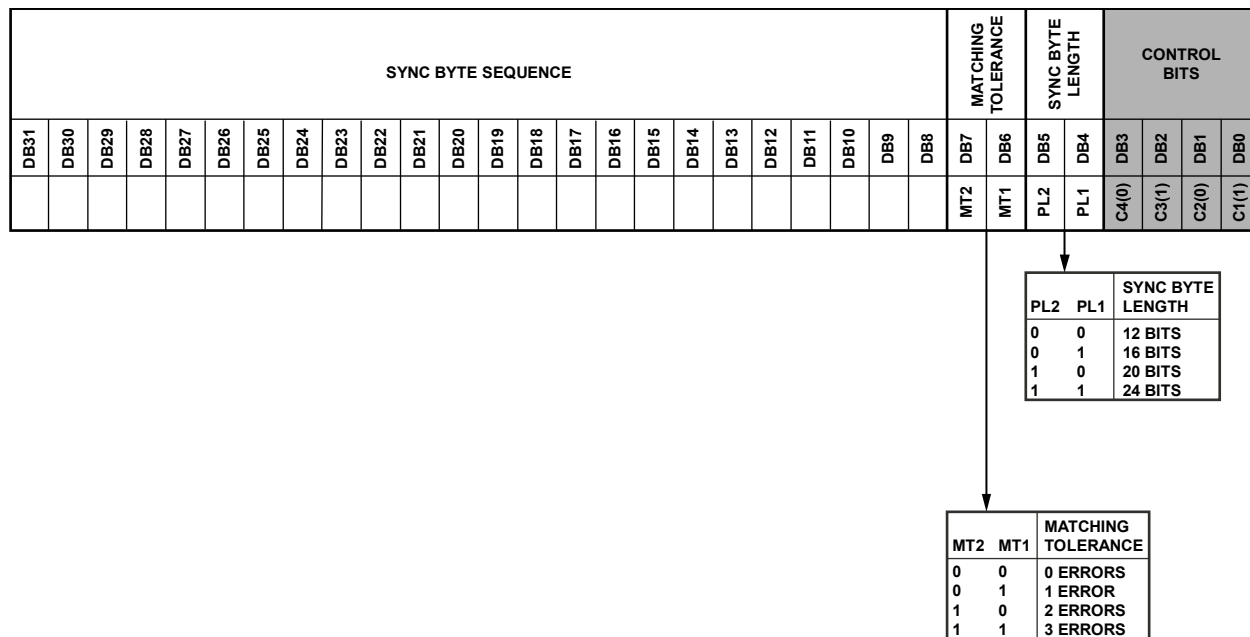
Figure 44. Register 5—Sync Byte Register

Register 5—Sync Byte Register Comments

- Sync byte detect is enabled by programming Bits R4_DB [25:23] to 010 or 011.

- This register allows a 24-bit sync byte sequence to be stored internally. If the sync byte detect mode is selected, then the INT/LOCK pin goes high when the sync byte has been detected in Rx mode. Once the sync word detect signal has gone high, it goes low again after nine data bits.

- The transmitter must transmit the MSB of the sync byte first and the LSB last to ensure proper alignment in the receiver sync byte detection hardware.

- Choose a sync byte pattern that has good autocorrelation properties.

ADF7025

REGISTER 6—CORRELATOR/DEMODULATOR REGISTER
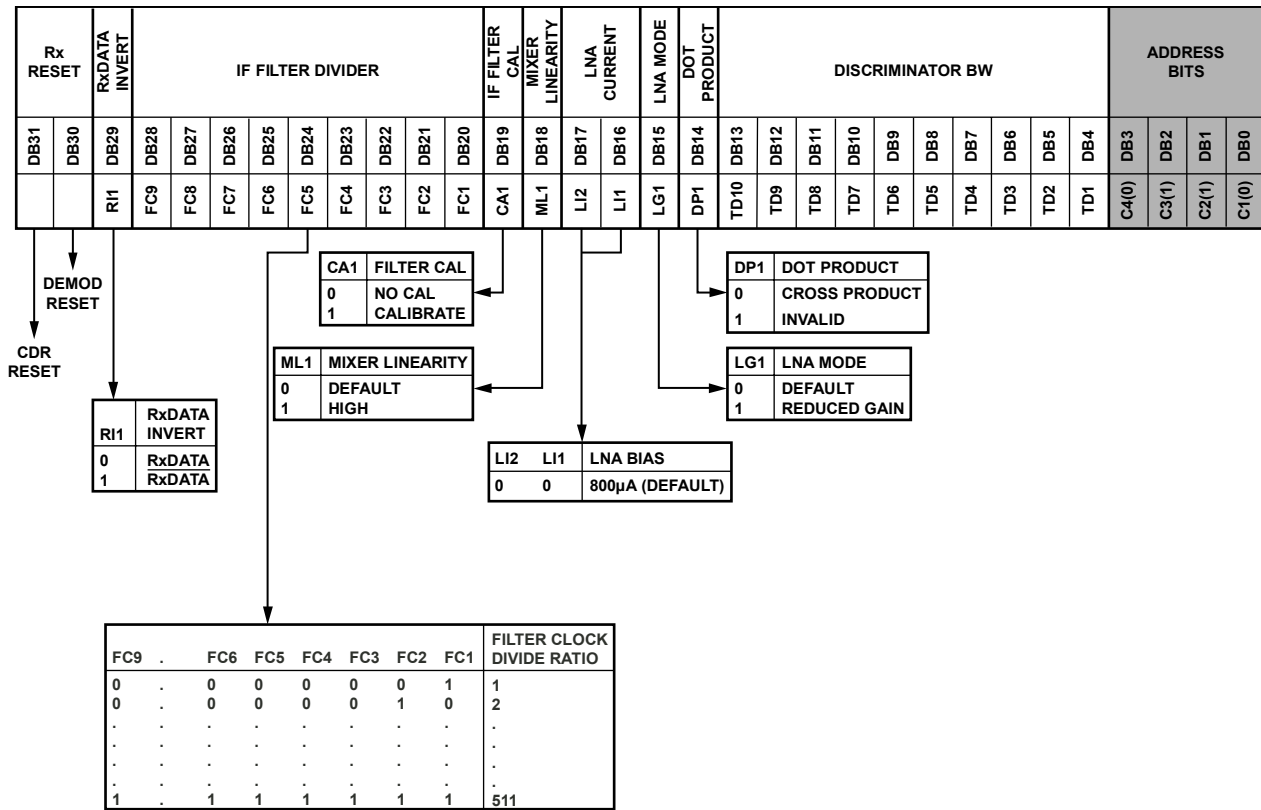
Figure 45. Register 6—Correlator/Demodulator Register

Register 6—Correlator/Demodulator Register Comments

- See the FSK Correlator/Demodulator section for an example of how to determine register settings.

- Nonadherence to correlator programming guidelines results in poor sensitivity.

- The filter clock is used to calibrate the LP filter. The filter clock divide ratio should be adjusted so that the frequency is 50 kHz. The formula is XTAL/FILTER_CLOCK_DIVIDE.

- The filter should be calibrated only when the crystal oscillator is settled. The filter calibration is initiated every time Bit R6_DB19 is set high.

- $Discriminator\_BW = DEMOD\_CLK/(4 \times DEVIATION\_Frequency)$. See the FSK Correlator/Demodulator section. Maximum value = 600.

- When LNA Mode = 1 (reduced gain mode), the Rx is prevented from selecting the highest LNA gain setting. This can be used when linearity is a concern. See the Readback Format section for details of the different Rx modes.

REGISTER 7—READBACK SETUP REGISTER

READBACK SELECT			ADC MODE		CONTROL BITS			
DB8	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
RB3	RB2	RB1	AD2	AD1	C4(0)	C3(1)	C2(1)	C1(1)

RB3	READBACK
0	DISABLED
1	ENABLED

AD2	AD1	ADC MODE
0	0	MEASURE RSSI
0	1	BATTERY VOLTAGE
1	0	TEMP SENSOR
1	1	TO EXTERNAL PIN

RB2	RB1	READBACK MODE
0	0	INVALID
0	1	ADC OUTPUT
1	0	FILTER CAL
1	1	SILICON REV

05542-046
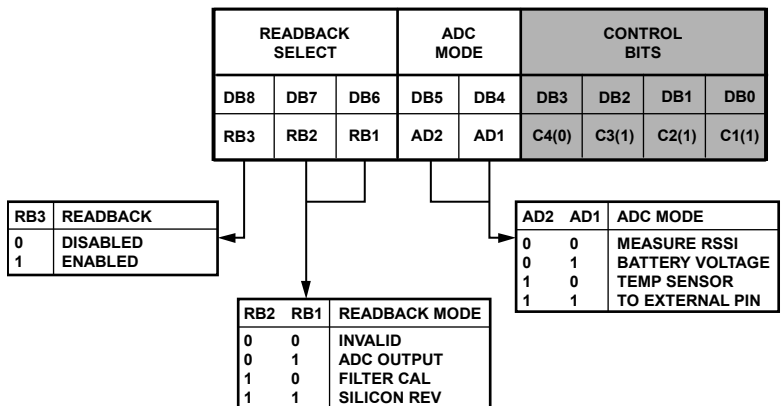
Figure 46. Register 7—Readback Setup Register

Register 7—Readback Setup Register Comments

- Readback of the measured RSSI value is valid only in Rx mode. Readback of the battery voltage, the temperature sensor, and the voltage at the external pin is not available in Rx mode if AGC is enabled.

- Readback of the ADC value is valid in Tx mode only if the log amp/RSSI has not been disabled through the Power-Down Bit R8_DB10. The log amp/RSSI section is active by default upon enabling Tx mode.

- See the Readback Format section for more information.

REGISTER 8—POWER-DOWN TEST REGISTER

DB15	DB14	PA ENABLE Rx MODE DB13	INTERNAL Tx/Rx SWITCH ENABLE DB12	LOG AMP/ RSSI DB11	DB10	DEMOD ENABLE DB9	ADC ENABLE DB8	FILTER ENABLE DB7	LNA/MIXER ENABLE DB6	VCO ENABLE DB5	SYNTH ENABLE DB4	CONTROL BITS DB3	DB2	DB1	DB0
		PD7	SW1	LR2	LR1	PD6	PD5	PD4	PD3	PD2	PD1	C4(1)	C3(0)	C2(0)	C1(0)

PD7	PA (Rx MODE)
0	PA OFF
1	PA ON

SW1	Tx/Rx SWITCH
0	DEFAULT (ON)
1	OFF

LR2	LR1	RSSI MODE
X	0	RSSI OFF
X	1	RSSI ON

PD6	DEMOD ENABLE
0	DEMOD OFF
1	DEMOD ON

PD5	ADC ENABLE
0	ADC OFF
1	ADC ON

PD4	FILTER ENABLE
0	FILTER OFF
1	FILTER ON

PD3	LNA/MIXER ENABLE
0	LNA/MIXER OFF
1	LNA/MIXER ON

PLE1 (FROM REG 0)	PD2	PD1	LOOP CONDITION
0	0	0	VCO/PLL OFF
0	0	1	PLL ON
0	1	0	VCO ON
0	1	1	PLL/VCO ON
1	X	X	PLL/VCO ON

Figure 47. Register 8—Power-Down Test Register

05542-047

Register 8—Power-Down Test Register Comments

- For a combined LNA/PA matching network, Bit R8_DB12 should always be set to 0. This is the power-up default condition.

- It is not necessary to write to this register under normal operating conditions.

REGISTER 9—AGC REGISTER

DB31	DB30	DB29	DB28	DB27	DB26	DB25	DIGITAL TEST IQ / DB24	FILTER GAIN / DB23	FILTER GAIN / DB22	LNA GAIN / DB21	LNA GAIN / DB20	GAIN CONTROL / DB19	AGC SEARCH / DB18	AGC HIGH THRESHOLD / DB17	DB16	DB15	DB14	DB13	DB12	DB11	AGC LOW THRESHOLD / DB10	DB9	DB8	DB7	DB6	DB5	DB4	ADDRESS BITS / DB3	DB2	DB1	DB0
							FI1	FG2	FG1	LG2	LG1	GC1	GS1	GH7	GH6	GH5	GH4	GH3	GH2	GH1	GL7	GL6	GL5	GL4	GL3	GL2	GL1	C4(1)	C3(0)	C2(0)	C1(1)

FI1	FILTER CURRENT
0	LOW
1	HIGH

FG2	FG1	FILTER GAIN
0	0	8
0	1	24
1	0	72
1	1	INVALID

GS1	AGC SEARCH
0	AUTO AGC
1	HOLD SETTING

GC1	GAIN CONTROL
0	AUTO
1	USER

GL7	GL6	GL5	GL4	GL3	GL2	GL1	AGC LOW THRESHOLD
0	0	0	0	0	0	1	1
0	0	0	0	0	1	0	2
0	0	0	0	0	1	1	3
0	0	0	0	1	0	0	4
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
1	1	1	1	1	0	1	61
1	1	1	1	1	1	0	62
1	1	1	1	1	1	1	63

GH7	GH6	GH5	GH4	GH3	GH2	GH1	RSSI LEVEL CODE
0	0	0	0	0	0	1	1
0	0	0	0	0	1	0	2
0	0	0	0	0	1	1	3
0	0	0	0	1	0	0	4
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
1	0	0	1	1	1	0	78
1	0	0	1	1	1	1	79
1	0	1	0	0	0	0	80

LG2	LG1	LNA GAIN
0	0	<1
0	1	3
1	0	10
1	1	30

Figure 48. Register 9—AGC Register

Register 9—AGC Register Comments

• The recommended AGC threshold settings are AGC_LOW_THRESHOLD = 15, AGC_HIGH_THRESHOLD = 79. The default settings (that is, if this register is not programmed) are AGC_LOW_THRESHOLD = 30, default AGC_HIGH_THRESHOLD = 70. See the RSSI/AGC section for details.

• AGC high and low settings must be more than 30 apart to ensure correct operation.

• LNA gain of 30 is available only if LNA mode, R6_DB15, is set to 0.

REGISTER 10—AGC 2 REGISTER

			SELECT I/Q	I/Q PHASE ADJUST				RESERVED	SELECT I/Q	UP/DOWN	I/Q GAIN ADJUST					AGC DELAY				LEAK FACTOR				PEAK RESPONSE				ADDRESS BITS			
DB31	DB30	DB29	DB28	DB27	DB26	DB25	DB24	DB23	DB22	DB21	DB20	DB19	DB18	DB17	DB16	DB15	DB14	DB13	DB12	DB11	DB10	DB9	DB8	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
			SIQ2	PH4	PH3	PH2	PH1	R1	SIQ1	UD1	GC5	GC4	GC3	GC2	GC1	DH4	DH3	DH2	DH1	GL7	GL6	GL5	GL4	PR4	PR3	PR2	PR1	C4(1)	C3(0)	C2(1)	C1(0)

SIQ2	SELECT IQ
0	PHASE TO I CHANNEL
1	PHASE TO Q CHANNEL

SIQ2	SELECT IQ
0	GAIN TO I CHANNEL
1	GAIN TO Q CHANNEL

DEFAULT = 0xA

DEFAULT = 0xA

DEFAULT = 0x2

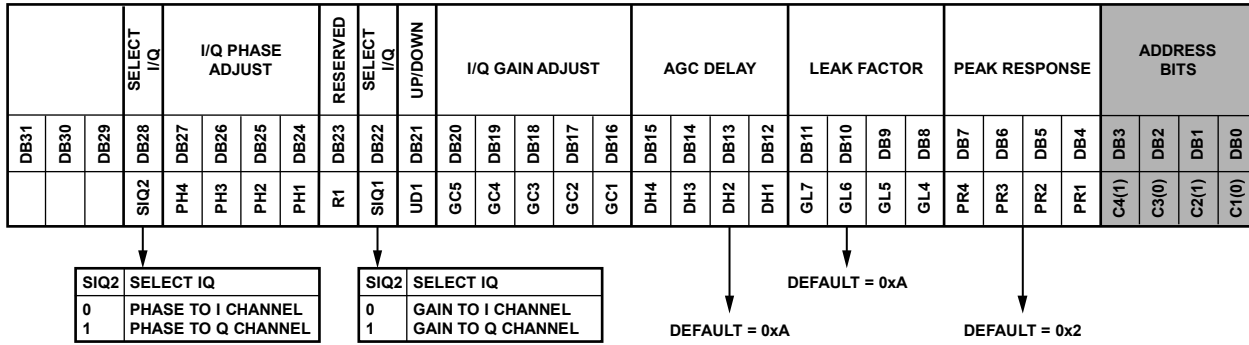*Figure 49. Register 10—AGC 2 Register*

Register 10—AGC 2 Register Comments

• Register 10 is not used under normal operating conditions.

• If adjusting AGC Delay or Leak Factor, clear Bit DB31 to Bit DB16.

REGISTER 12—TEST REGISTER

PRESCALER	ANALOG TEST MUX				FORCE LD HIGH	OSC TEST	SOURCE	IMAGE FILTER ADJUST						DIGITAL TEST MODES				COUNTER RESET	Σ-Δ TEST MODES				PLL TEST MODES					ADDRESS BITS			
DB31	DB30	DB29	DB28	DB27	DB26	DB25	DB24	DB23	DB22	DB21	DB20	DB19	DB18	DB17	DB16	DB15	DB14	DB13	DB12	DB11	DB10	DB9	DB8	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
PRE						QT1	CS1	SF6	SF5	SF4	SF3	SF2	SF1						T9	T8	T7	T6	T5	T4	T3	T2	T1	C4(1)	C3(1)	C2(0)	C1(0)

P	PRESCALER
0	4/5 (DEFAULT)
1	8/9

DEFAULT = 32. INCREASE NUMBER TO INCREASE BW IF USER CAL ON

CR1	COUNTER RESET
0	DEFAULT
1	RESET

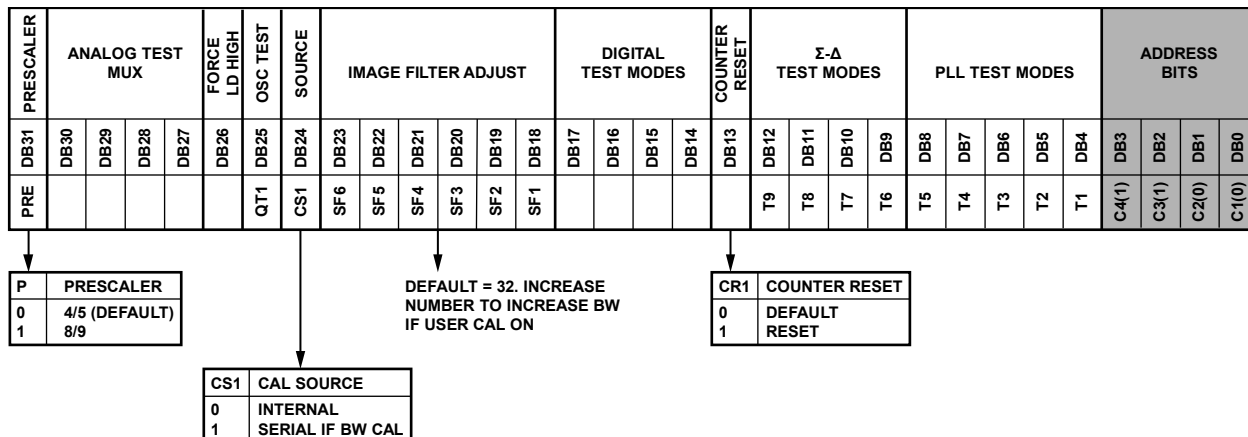| CS1	CAL SOURCE
0	INTERNAL
1	SERIAL IF BW CAL

Figure 50. Register 12—Test Register

Using the Test DAC on the ADF7025 to Implement Analog FM DEMOD and Measuring SNR

The test DAC allows the output of the postdemodulator filter for both the linear and correlator/demodulators to be viewed externally. It takes the 16-bit filter output and converts it to a high frequency, single-bit output using a second-order error feedback Σ-Δ converter. The output can be viewed on the XCLK$_{OUT}$ pin. This signal, when IF-filtered appropriately, can then be used to

- Monitor the signals at the FSK postdemodulator filter output. This allows the demodulator output SNR to be measured. Eye diagrams can also be constructed of the received bit stream to measure the received signal quality.

- Provide analog FM demodulation.

While the correlators and filters are clocked by DEMOD_CLK, CDR_CLK clocks the test DAC. Note that, although the test DAC functions in a regular user mode, the best performance is achieved when the CDR_CLK is increased up to or above the frequency of DEMOD_CLK. The CDR block does not function when this condition exists.

Programming the test register, Register 12, enables the test DAC. Both the linear and correlator/demodulator outputs can be multiplexed into the DAC.

Register 13 allows a fixed offset term to be removed from the signal in the case where there is an error in the received signal frequency. If there is a frequency error in the signal, the user should program half this value into the offset removal field. It also has a signal gain term to allow usage of the maximum dynamic range of the DAC.

Setting Up the Test DAC

- Digital test modes = 7: enables the test DAC, with no offset removal (0x0001C00C).

- Digital test modes = 10: enables the test DAC, with offset removal.

The output of the active demodulator drives the DAC; that is, if the FSK correlator/demodulator is selected, the correlator filter output drives the DAC.

REGISTER 13—OFFSET REMOVAL AND SIGNAL GAIN REGISTER

TEST DAC GAIN						TEST DAC OFFSET REMOVAL										PULSE EXTENSION				KI				KP				CONTROL BITS			
DB31	DB30	DB29	DB28	DB27	DB26	DB25	DB24	DB23	DB22	DB21	DB20	DB19	DB18	DB17	DB16	DB15	DB14	DB13	DB12	DB11	DB10	DB9	DB8	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
																PE4	PE3	PE2	PE1									C4(1)	C3(1)	C2(0)	C1(1)

PE4	PE3	PE2	PE1	PULSE EXTENSION
0	0	0	0	NORMAL PULSE WIDTH
0	0	0	1	2× PULSE WIDTH
0	0	1	0	3× PULSE WIDTH
.	.	.	.	.
.	.	.	.	.
.	.	.	.	.
1	1	1	1	16× PULSE WIDTH

*Figure 51. Register 13—Offset Removal and Signal Gain Register*

Register 13—Offset Removal and Signal Gain Register Comments

Because the linear demodulator output is proportional to frequency, it usually consists of an offset combined with a relatively low signal. The offset can be removed, up to a maximum of 1.0, and gained to use the full dynamic range of the DAC, as follows: $DAC\_Input = (2^\wedge Test\_DAC\_Gain) \times (Signal - Test\_DAC\_Offset\_Removal/4096)$.

OUTLINE DIMENSIONS
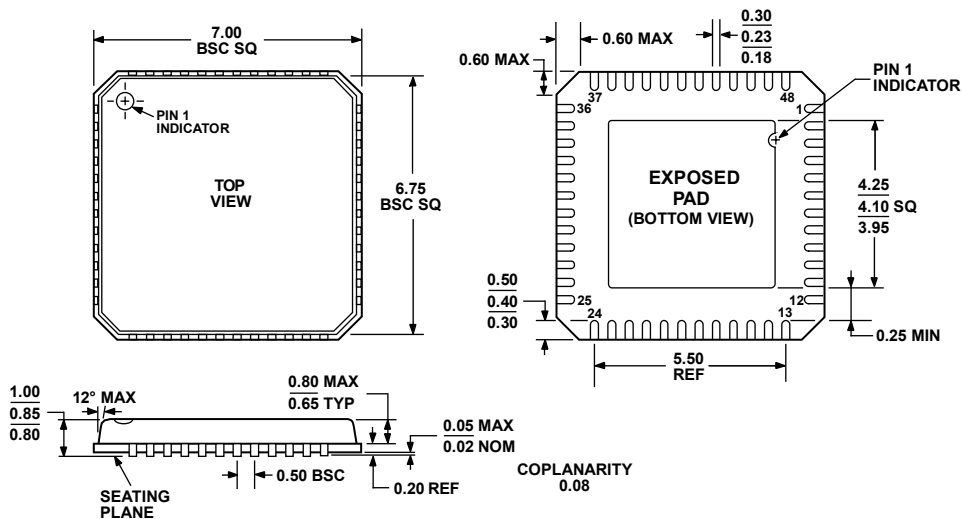
COMPLIANT TO JEDEC STANDARDS MO-220-VKKD-2

Figure 52. 48-Lead Lead Frame Chip Scale Package [LFCSP_VQ]
7 mm × 7 mm Body, Very Thin Quad
(CP-48-3)
Dimensions shown in millimeters

ORDERING GUIDE

Model	Temperature Range	Package Description	Package Option
ADF7025BCPZ[1]	−40°C to +85°C	48-Lead Lead Frame Chip Scale Package [LFCSP_VQ]	CP-48-3
ADF7025BCPZ-RL[1]	−40°C to +85°C	48-Lead Lead Frame Chip Scale Package [LFCSP_VQ]	CP-48-3
ADF7025BCPZ-RL7[1]	−40°C to +85°C	48-Lead Lead Frame Chip Scale Package [LFCSP_VQ]	CP-48-3
EVAL-ADF70XXMB		Control Mother Board	
EVAL-ADF70XXMB2		Evaluation Platform	
EVAL-ADF7025DB1		902–928 MHz Daughter Board	

[1] Z = Pb-free part.

NOTES

NOTES

NOTES

ANALOG DEVICES

www.analog.com