

# Exercise 1: Software Architecture Description of the HS07 System

Anders H Poder, Jesper Dalberg, Lars Kringelbach

Department of Computer Science, University of Aarhus  
Aabogade 34, 8200 Århus N, Denmark

Group 11 - Kilo  
19951439, 20074976, 20074842  
{ahp, jdalberg, u074842}@daimi.au.dk

2008-02-04 13:32

## Abstract

The HS07 system implements a closed-loop control of the heating in a private home. It monitors thermometers in the home, and based on measurements HS07 adjusts radiators in the home. This report gives a software architecture description of an architectural prototype of the HS07 system. The techniques used for architectural description are taken from [Christensen et al., 2004].

## 1 Introduction

Figure 1 shows a schematic overview of HS07 in a home. The home may be accessed by the home owner from the outside through the HS07 gateway. The HS07 gateway also monitors and controls the home.

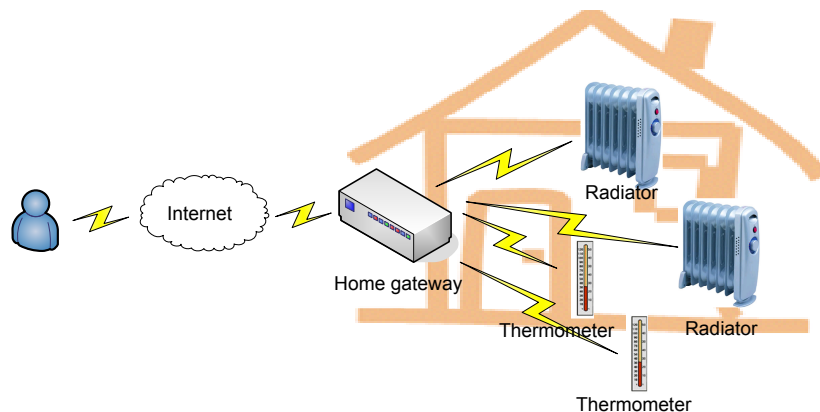


Figure 1: HS07 in a home

HS07 includes sensor and actuator hardware which runs on an embedded Java virtual machine with standard software.

## 2 Architectural Requirements

For our purposes there is one main use case for the HS07 system:

*Control Temperature:* The gateway collects measurements from thermometers and reports this to radiators that then control the temperature.

The major driving qualities attributes of the HS07 system are<sup>1</sup>:

- *Performance.* HS07 should be performant so that a large number of thermometers and radiators may be part of the system.
- *Modifiability.* It must be possible to modify HS07 to include new types of sensors and actuators.
- <<Extra quality requirement that you consider important >>

## 3 Architectural Description

### 3.1 Module Viewpoint

The module viewpoint of the HS07 system.

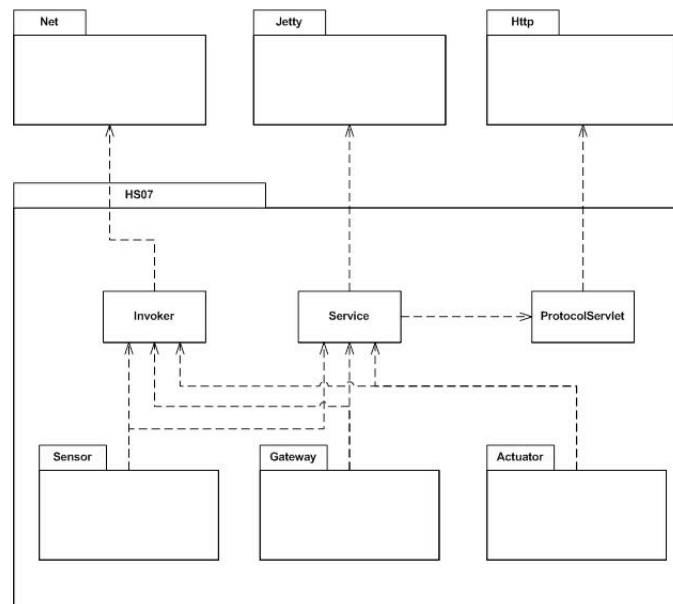


Figure 2: HS07 Package Diagram

The figure shows the packages of the HS07 system, and how they interact with java packages used.

<sup>1</sup>These qualities will be operationalized in Exercise 2

### 3.2 Component & Connector Viewpoint

The Component & Connector view consists of an Active Objects diagram and a sequence diagram. The Active Objects diagram shows the active objects of the HS07 system, and how they interact.

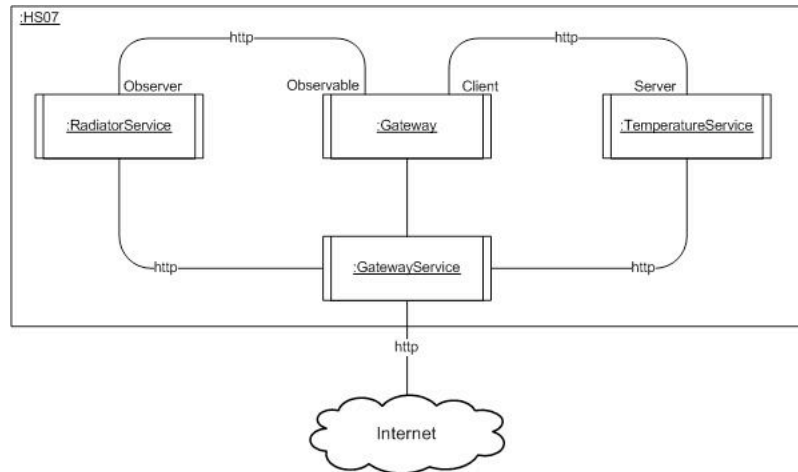


Figure 3: HS07 Active Objects

The sequence diagram illustrates the timing of the interactions.

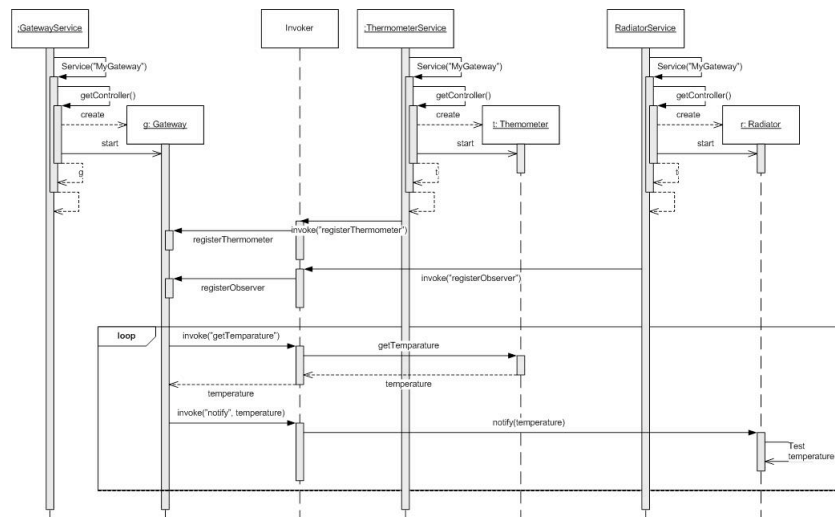


Figure 4: HS07 Sequence Diagram

### 3.3 Allocation Viewpoint

The allocation viewpoint illustrates how components are deployed in actual processes within the HS07 system.

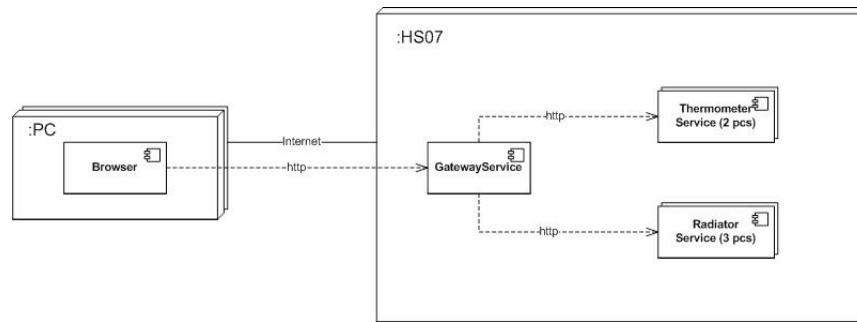


Figure 5: HS07 Allocation Diagram

## 4 Discussion

<<What are the strengths and limitations of this approach to architectural description judging from this case?>>

When performing reverse engineering to achieve an architectural description, the dangers posed seem to be finding the correct balance in the choice of detail level. It is easy to get too much information, cluttering the purpose of the AD, which in a basic sense is to clarify and present a wider understanding of the system.

If you are a systems developer, a reverse engineered AD might help you understand the code better.

Experienced architects might recognize patterns emerging from the process, and immediately see possible design flaws in the implementation of these, thus being able to help improve the next version of the system.

<<Are there aspects of the software architecture that have not been properly described?>>

<< For the architectural description above, discuss what (if anything) should be changed or added for it to comply with the requirements of the architectural description.>>

<< Consider the definition of software architecture by [Perry and Wolf, 1992]. Discuss what the 'elements' of the architecture are.>>

[Perry and Wolf, 1992] defines "elements" as three different classes, data elements, processing elements and connecting elements. In HS07 the data elements are temperatures, the processing element is the gateway and the connecting element is HTTP. The "form", as described by Perry and Wolf, is the choice of the observer pattern in HS07, and the "rationale" for doing so are defined by the Architectural Requirements described elsewhere in this document.

## 5 ...

### References

- [Christensen et al., 2004] Christensen, H., Corry, A., and Hansen, K. (2004). An approach to software architecture description using UML. Technical report, Computer Science Department, University of Aarhus.
- [Perry and Wolf, 1992] Perry, D. E. and Wolf, A. L. (1992). Foundations for the study of software architecture. Technical report, SIGSOFT Software.