




AIN CON

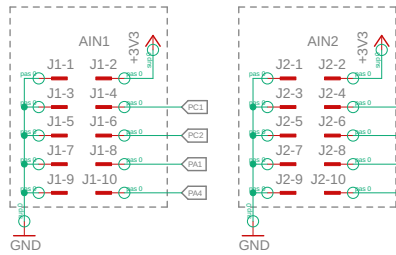



GPIO CON

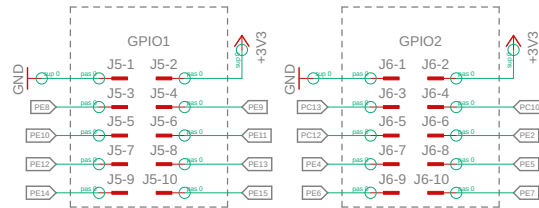

SD/ SPI 3.3V

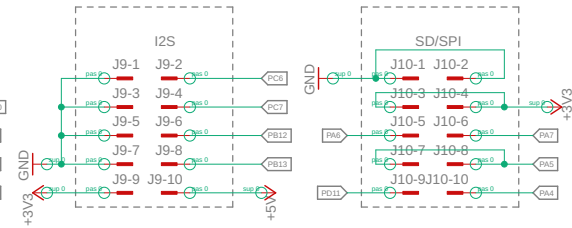


CONNECTOR

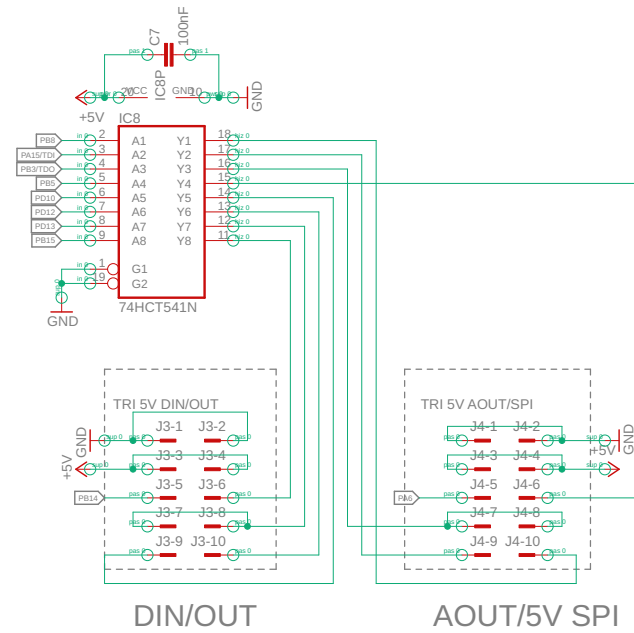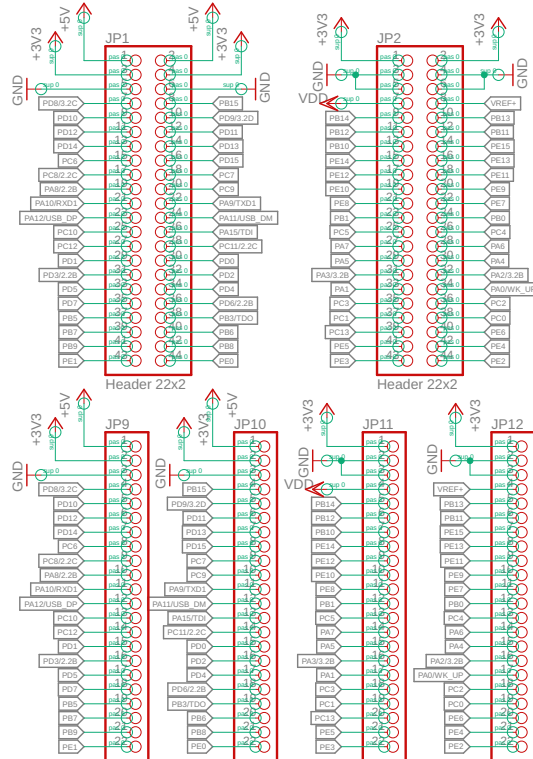


STM32F407VG BREAKOUT PIN


TRI-STATE BUFFER 541



3.5' RPI LCD



CAN

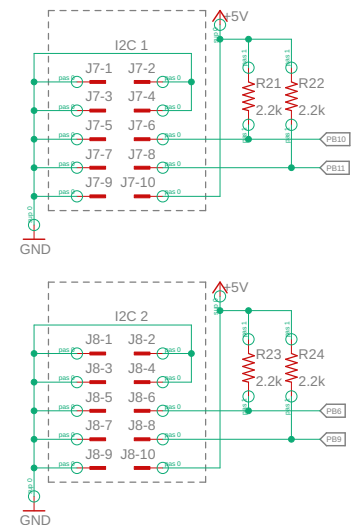

I2C CON

Main Schematic

TITLE: Synth


Document Number:

REV:


Date: 7/11/2022 7:56 PM




Sheet: 1/3

USB



POWER 5v



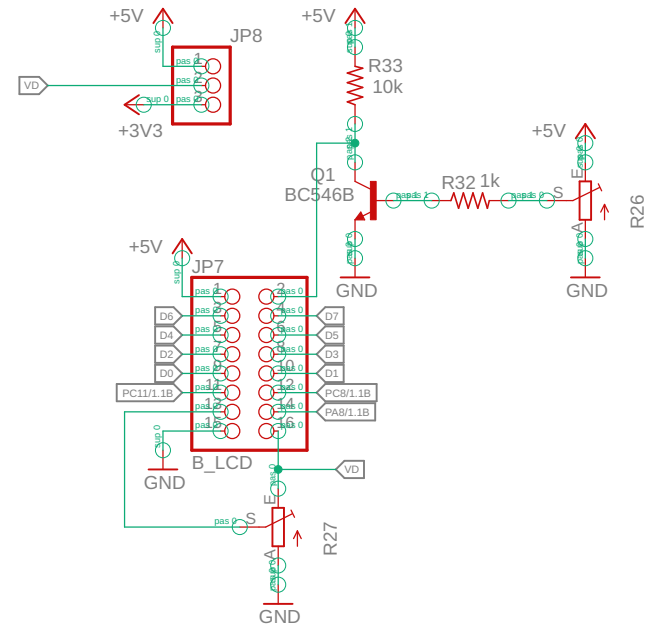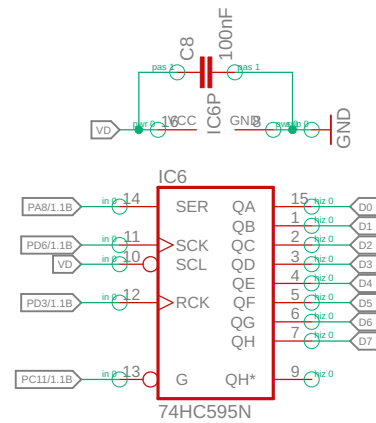

GLCD

TITLE: Synth


Document Number:

REV:


Date: 7/11/2022 7:56 PM

Sheet: 2/3


MIDI I/O 1

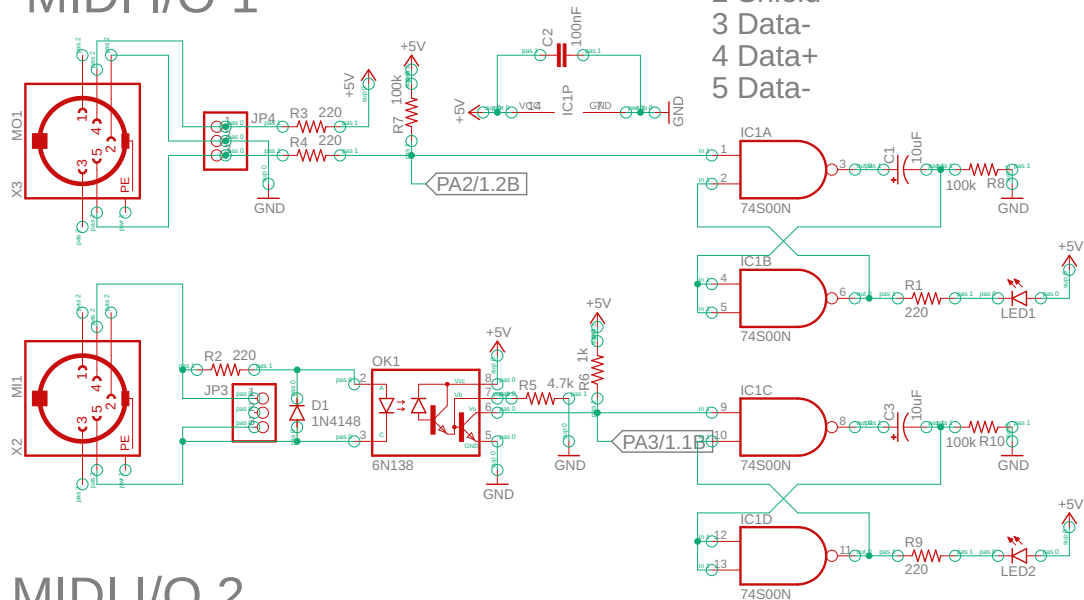

MIDI I/O 2

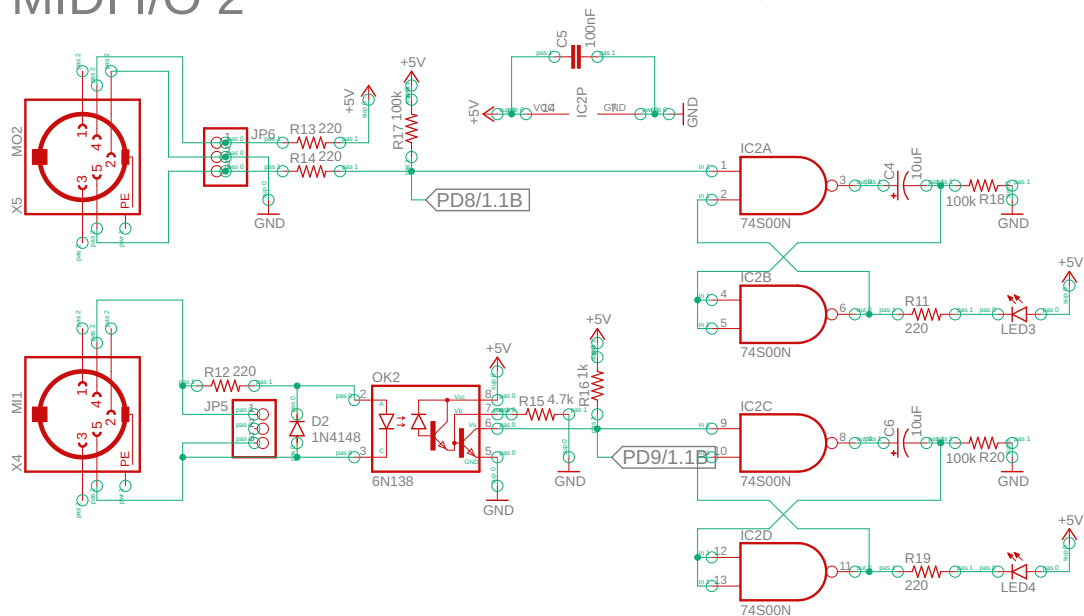

FRONT

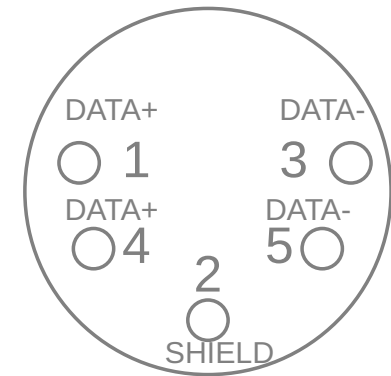

MIDI I/O

TITLE: Synth

Document Number:

REV:

Date: 7/11/2022 7:56 PM

Sheet: 3/3