
CIS Software Manual

Release b2014.11.18 (06:03 UTC)

Andrew Hundt and Alex Strickland

November 18, 2014

Contents


1	Introduction	3
1.1	PA1	3
1.2	PA2	3
1.3	PA3	4
2	Mathematical Approach	4
2.1	Distortion Correction	4
	Tradeoffs	5
2.2	Point Cloud Registration	5
2.3	Pivot Calibration	6
2.4	Finding the Closest Point on a Triangle	6
2.5	ICP	6
3	Algorithmic Approach:	7
3.1	Parsing	7
3.2	Transforms	7
3.3	Pivot Calibration	7
3.4	Distortion Calibration	7
3.5	ICP Registration	8
4	Structure of the Program	8
4.1	Important Functions and Descriptions	9
	PA1	9
	PA2	9
	PA3	10
5	Results and Discussion	10
5.1	Validation	10
5.2	Point Cloud Registration	11
5.3	Calibration	11
5.4	Finding the Closest Point on a Triangle	11
6	Status of results	11
6.1	PA 2	11
6.2	PA 3	11
6.3	Tabular Summary of PA 3 Unknown Data Results	12
6.4	Error Propagation	12

	PA 2	12
	PA 3	13
6.5	Results Metric	13
	PA 2	13
	PA 3	13
7	Additional Information	13
7.1	Features	13
7.2	People	14
	Software Development	14
7.3	Quick Start	14
	First Steps	14
	Advanced Information	18
7.4	Read the Data format	18
7.5	Getting Help	19
7.6	Reference	20
	Source Package	20
7.7	Download	20
	Source Code	20
	Documentation	20
7.8	Installation	21
	Prerequisites	21
	Configure	21
	Build	21
	Test	21
	Install	22

1 Introduction

1.1 PA1

The purpose of PA1 was to develop an algorithm for a 3D point set to 3D point set registration and a pivot calibration. The problem involved a stereotactic navigation system and an electromagnetic positional tracking device. Tracking markers were placed on objects so the optical tracking device and an electromagnetic tracking device could measure the 3D positions of objects in space relative to measuring base units. These objects were then registered so that they could be related in the same coordinate frames. Pivot calibration posts were placed in the system so pivot calibration could be performed and the 3D position of two different probes could be tracked throughout the system. The diagram below from the assignment document gives a visual description of the system.

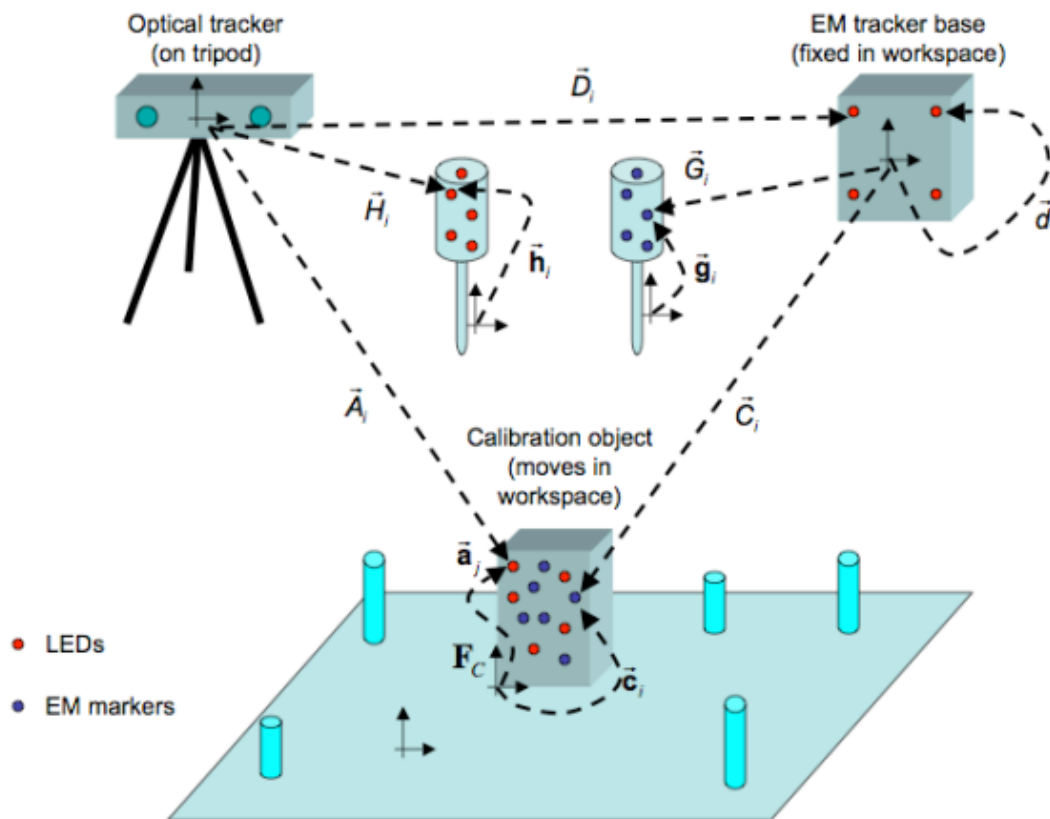


1.2 PA2

In addition to all of the steps outlined in PA1, the core purpose of PA2 was to develop an algorithm for distortion correction and to implement it for use with the stereotactic navigation system of PA1. In addition to distortion correction, we performed registration of the device coordinate frames to prior CT coordinate frames.

1.3 PA3

The purpose of PA3 was to develop an iterative-closest point (ICP) registration algorithm. The problem involved a 3D triangular surface mesh of a bone found in CT coordinates and two rigid bodies. One rigid body is rigidly attached to the bone and one to be used as a pointer. LED markers were attached to the two rigid bodies so that the coordinates could be determined in optical coordinates. An ICP registration was implemented so that a the closest point on the triangular mesh could be found to a number of points where the tip of the pointer contacted the bone. The diagram below from the assignment document gives a visual description of the system.

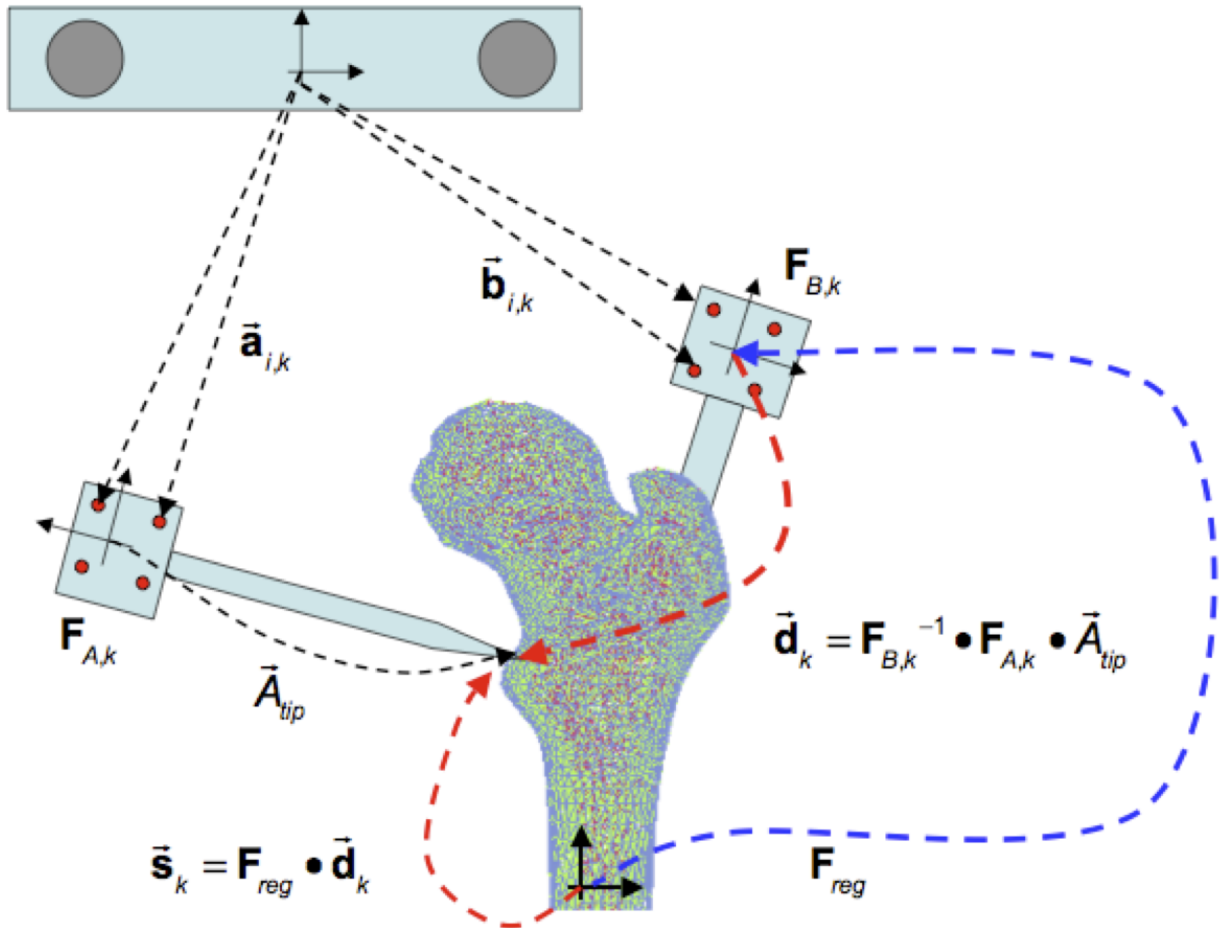

2 Mathematical Approach

2.1 Distortion Correction

A number of distortion correction methods are available to correct for inaccuracies among various sensor coordinate systems and the real physical dimensions of the world. We selected Bernstein polynomials for our implementation due to their numerical stability and accuracy for the specific electromagnetic distortion problem we encounter. The basic idea in this case is to construct a 3D polynomial representing the spatial flexing caused by distortions in measurements.

To reap the best of the numerical stability properties of the Bernstein polynomial we scale the input values to the range from 0 to 1. Therefore we scale the values to within the range [0,1] in each dimension, utilizing the minimum bounding rectangle (MBR) to determine the scale factor. Then, we construct a 5th degree Bernstein polynomial for

each point using the polynomial function outlined in slide 18 of the InterpolationReview.pdf lecture notes pictured below.

$$B_{N,k}(v) = \binom{N}{k} (1-v)^{N-k} v^k$$

We then stack the polynomials to form the F Matrix, although this polynomial can be increased for higher precision or decreased for higher performance as needed. Once we have these polynomials stacked as a large matrix we solve the least squares problem utilizing SVD against the ground truth data, as outlined on slide 43 of the lecture notes pictured below.

$$\begin{bmatrix} \vdots \\ F_{000}(\vec{u}_s) & \cdots & F_{555}(\vec{u}_s) \\ \vdots \end{bmatrix} \begin{bmatrix} c_{000}^x & c_{000}^y & c_{000}^z \\ \vdots & \vdots & \vdots \\ c_{555}^x & c_{555}^y & c_{555}^z \end{bmatrix} \cong \begin{bmatrix} \vdots \\ p_s^x & p_s^y & p_s^z \\ \vdots \end{bmatrix}$$

The output of that equation is the calibration coefficient matrix which can then be multiplied by the stacked F matrix of a distorted point set to generate the final corrected and undistorted point set. Multiplication of a stacked matrix is a more efficient alternative to the loop of sums from the slides.

Tradeoffs

One of the particular advantages of Bernstein polynomials is the ability to select the degree of the polynomial. The polynomial degree presents an interesting tradeoff, because a higher degree polynomial allows more precise representation of distortions and lower error. This benefit comes at the cost of an exponential increase in computation time for each additional polynomial degree.

2.2 Point Cloud Registration

A number of least squares methods could be used to determine a transformation matrix for a 3D point set registration. We selected Horn's method because a rotation matrix is always found and no iterative approximation is involved. The first step is to find the centroid of the point clouds in the two different coordinate systems. Then the centroid is subtracted from each point measurement of the separate point clouds so the points will be relative to the centroid. Next an H matrix is created which is the sum of the products of each corresponding point in the two frames. A real symmetric G matrix is then created from the sums and differences of the elements in the H matrix which was previously created. Next, the eigenvalues and corresponding eigenvectors of the G matrix were calculated. The eigenvector corresponding to the most positive eigenvalue represents the unit quaternion of the matrix. Once the quaternion is known, the rotation matrix can be found using Rodriguez's formula. The translation between the two coordinate systems is next found from the difference between the centroid of the known point cloud and the scaled centroid of the unknown point cloud. Finally a homogeneous transformation matrix could be made to know the frame transformation between the two point clouds.

2.3 Pivot Calibration

For the pivot calibration, singular value decomposition was used to estimate the orientation of the probe by finding the positions of the centroid of the tracked markers on the probe and the tip of the probe. First, a matrix was created which consisted of the rotation matrices calculated in each frame and the negative identity matrix found using Horn's method.[1] Next, a vector was created which consisted of the stack of the translation vectors in each frame also found using Horn's method. The singular value decomposition of the matrix was performed to split the matrix into the matrices containing the singular values, the left-singular vectors, and the right singular vectors. Once this was done, the vector between the centroid of the tracked markers on the probe and the probe tip could be approximated using the SVD matrices and the translation vectors of each frame.

- [1] Horn, Closed-form solution of absolute orientation using unit quaternions, Optical Society of America (1987)

2.4 Finding the Closest Point on a Triangle

If the vertices of a triangle are known and there is a point in space, then the closest point that lies on the triangle to the point in space can be found. This is done by using the equations (from the Point Pairs lecture slides) given below:

$$\mathbf{a} - \mathbf{p} \approx \lambda(\mathbf{q} - \mathbf{p}) + \mu(\mathbf{r} - \mathbf{p})$$

$$\mathbf{c} = \mathbf{p} + \lambda(\mathbf{q} - \mathbf{p}) + \mu(\mathbf{r} - \mathbf{p})$$

Where \mathbf{a} is the point in space, \mathbf{p} , \mathbf{q} , and \mathbf{r} are the vertices of the triangles, and \mathbf{c} is the closest point that lies on the triangle. If the following constraints (from the Point Pairs lecture slides) are true:

$$\lambda \geq 0, \mu \geq 0, \lambda + \mu \leq 1$$

Then the \mathbf{c} is the closest point and lies within the triangle's boundaries. A 2x2 linear system can then be solved using an explicit least squares approach to find λ and μ . If the closest point lies on the boundaries of the triangle, then the point must be projected onto every side of the triangle. The equations (from the Point Pairs lecture slides) below show how this is implemented:

$$\lambda = \frac{(\mathbf{c} - \mathbf{p}) \cdot (\mathbf{q} - \mathbf{p})}{(\mathbf{q} - \mathbf{p}) \cdot (\mathbf{q} - \mathbf{p})}$$

$$\lambda^* = \text{Max}(0, \text{Min}(\lambda, 1))$$

Where \mathbf{p} and \mathbf{q} are the two end points of the line segment, \mathbf{c} is the point to be projected on the line segment, \mathbf{c}^* is the projected point on the line segment, and λ^* is the ratio of normalized length from \mathbf{p} to \mathbf{c}^* . If two of the three \mathbf{c}^* projections lie on the same vertex, then the closest point on the triangle is that vertex. Otherwise, the closest point will be the \mathbf{c}^* projection on the side whose value for λ^* satisfies the conditions of being between one and zero. Then the equation (from the Point Pairs lecture slides) below is implemented to find the closest point \mathbf{c}^* :

$$\mathbf{c}^* = \mathbf{p} + \lambda^* (\mathbf{q} - \mathbf{p})$$

2.5 ICP

The ICP approach for this programming assignment was very simple. For every triangle in the mesh, the find the closest point method was implemented. Once closest point was found, the error between the two points was computed by taking the norm. Then the triangle, whose point produced the smallest error, was said to be the closest point on the mesh.

3 Algorithmic Approach:

3.1 Parsing

We developed our algorithm using C++. The Eigen library was used as a Cartesian math package for 3D points, rotations, and frame transformations. The Boost library was also used to write a parser file and develop various aspects of our algorithms. The first step was to write parser code that could interpret the given data. The parser needed to interpret which data set was being entered, the number of frames in each data set, and which markers were being tracked in the data set. The parser would store the data as Eigen matrices to be easily used for our algorithms.

3.2 Transforms

Once the data was parsed, two matrices containing marker positions in different coordinate frames was put in the function `hornRegistration` to determine the corresponding transformation matrix between the two frames. The first step of the `hornRegistration` was to find the two centroids of two 3D marker positions and subtract it from each marker position using functions in the Eigen library. The next step was to put these values in a function that would create a 3x3 H matrix. Once this was done, the H matrix could be put in a separate function that would calculate the 4x4 G matrix. The eigenvalues and the corresponding eigenvectors of the G matrix were next calculated by using functions of the Eigen library. A vector of each eigenvalue and the corresponding eigenvector was then created so that the eigenvalues could be sorted to find the most positive eigenvalue and its corresponding eigenvector which represented the unit quaternion of the rotation. Next, the 3x3 rotation matrix was created by an Eigen function that converted a unit quaternion into the corresponding rotation matrix. Finally, the translation vector between the two centroids was calculated and a 4x4 homogeneous transformation matrix was created by using another function that takes a rotation matrix and a translation vector and outputs the corresponding transformation matrix.

3.3 Pivot Calibration

Next a pivot calibration algorithm was created which used both the parser and `hornRegistration` algorithms mentioned above. First, the tracker data was parsed into separate matrices which corresponded to each frame of tracked data. Each matrix of frame data was compared to the base matrix frame using the `hornRegistration` function described above and the corresponding homogeneous transformation from the base frame to the current frame was found. The rotational component of each frame was put into an Eigen matrix and the translational component of each frame was put into an Eigen vector with the form described in the mathematical approach above. The function of `JacobiSVD` of the Eigen library was then used to solve the least squares vector between the rotational matrix and translation vectors. The least squares vector contained approximated orientation of the probe and the position of the probe tip.

3.4 Distortion Calibration

Next we create a distortion calibration algorithm, which followed the mathematical procedure outlined above. First, the data was parsed and stored in a large vector so the the maximum and minimum values could be obtained in the X, Y, and Z dimensions of the data set. Then the values of the data set were scaled to between [0 1] to create a minimum bounding box. We calculate Bernstein polynomials for each point and stack them into the F matrix. The Eigen library is utilized to calculate the SVD of $Fc=p$, where F is the F matrix of Bernstein Polynomials, c is the calibration coefficient matrix, and p is the undistorted points matrix that you compare the distorted points to. A separate set of points can be scaled according to the same distortion parameters from above and the distortion associated with their measurement can be corrected.

Once this is done, an the same Fmatrix calculated above can be calculated for this new set of points. Then the c calibration coefficient matrix was multiplied by the Fmatrix to find the undistorted points in the new coordinate system. Once the data was undistorted, we were able to run a new pivot calibration with the undistorted points to see how well our undistortion works. The next step was to use the distortion matrix to find CT fiducials in the EM frame.

The new data was scaled by the same scaling function as above and put into a new Fmatrix. In this way, a new Fmatrix could be found and the measured points could be undistorted. Then these values were used with known values of points measured in the CT frame to find a transformation matrix Freg that would take you from the EM frame to the CT frame. Finally the tip of the EM probe could be measured in the CT frame.

3.5 ICP Registration

Next an ICP Registration algorithm was created which used both the parser and hornRegistration algorithms mentioned above. First, each point of tracker data was parsed into Eigen vectors of (x,y,z) coordinates which corresponded to the position of the trackers attached to the rigid bodies, A and B, in optical coordinates. Next, another set of tracker data was parsed into Eigen vectors of (x,y,z) coordinates which corresponded to the position of the trackers attached to the rigid bodies in their body coordinates. The transformation matrix from the body frame to the optical tracker frame was then computed using the hornRegistration function described above. Then the coordinates tip of the rigid body A with respect to rigid body B was found by multiplying the vector of the tip in body A coordinates by the transformations previously found.

Next, the mesh data was parsed so the vertices of each triangle was known. Then ICP registration could be used to find the point on the mesh that was closest to the tip of rigid body A. First, the transformation from the CT mesh coordinates to the rigid body B coordinates was assumed to be the identity matrix. Once this assumption was made, sample points were found by multiply the transformation from CT mesh coordinates to the rigid body B coordinates by the tip of the pointer A in rigid body A coordinates. Now these sample points were used to which points on the CT mesh they were closest to with the given transformation. The simplest FindNearestPoint function was implemented in which the the nearest point to the sample points on the CT mesh was calculated for every triangle in the mesh. The error between the two points for each triangle was calculated by taking the norm between the points and the smallest error corresponded to the nearest point on the mesh to the pointer tip A.

A more efficient method would be to run the FindNearestPoint function on only some of the triangles that passed initial criteria instead of all of the triangles. This would be done by using a data structure such as a bounding box or some type of hierarchical data structure.

4 Structure of the Program

The software is structured as a set of header only libraries in the include folder, which are utilized by the unit tests, main, and any external libraries that choose to use these utilities.

The most important files include:

File name	Description
IterativeClosestPoint.hpp	Algorithm for finding ICP registration.
hornRegistration.hpp	Horn's method of Point Cloud to Point Cloud registration.
DistortionCalibration.hpp	Bernstein Polynomial method of distortion correction.
hornRegistration.hpp	Horn's method of Point Cloud to Point Cloud registration.
PivotCalibration.hpp	Pivot Calibration.
PA2.hpp	fiducialPointInEMFrame() and probeTipPointinCTFrame() PA2 #4,6
PA3.hpp	Implements icp solving of specific PA3 system.
cisHW1test.cpp	An extensive set of unit tests for the library relevant to PA1.
cisHW2test.cpp	An extensive set of unit tests for the library relevant to PA2.
cisHW3test.cpp	An extensive set of unit tests for the library relevant to PA3.
cisHW1-2.cpp	Main executable source, contains cmdline parsing code and produces output data.
cisHW3-4.cpp	Main executable source, contains cmdline parsing code and produces output data.
parseCSV...	File parsing functions are in parseCSV_CIS_pointCloud.hpp .

4.1 Important Functions and Descriptions

Each function includes substantial doxygen documentation explaining its purpose and usage. This documentation can be viewed inline with the source code, or via a generated html sphinx + doxygen website generated using CMake. Here is a list of the most important functions used in the program is a brief description of each of them.

PA1

EigenMatrix()

Computes the eigenvalues and corresponding eigenvectors from a given G matrix. It outputs a rotation matrix corresponding to the unit quaternion of the largest positive eigenvalue

homogeneousmatrix()

Creates a 4x4 homogeneous matrix from a derived rotational matrix and translational vector

hornRegistration()

Computes the homogeneous transformation matrix F given a set of two cloud points. It is comprised of the various functions listed above

homogeneousInverse()

Computes the inverse of a given homogeneous matrix

registrationToFirstCloud()

Parses the data and runs the hornRegistration function for pivot calibration

transformToRandMinusIandPMatrices()

Creates the A and b components of the form $Ax=b$ for singular value decomposition. A is of the form $[R|I]$ while b is of the form $[-p]$ where R is the stack of rotational matrices of the F transformation matrices, I is stack of 3x3 identity matrices, and p is the stack of the translational vectors of the F transformation matrices.

SVDSolve()

Computes the x of the least squares problem $Ax=b$ using singular value decomposition when the stack of matrices is given

Hmatrix()

Computes a sum of the products H matrix given a set of two cloud points

Gmatrix()

Computes a sum of the differences of the given H matrix

pivotCalibration()

Computes the pivot point position from tracking data using the SVDSolve(), registrationToFirstCloud(), and transformToRandMinusIandPMatrices() functions

PA2

CorrectDistortion()

Correct distortions in one point cloud by utilizing distorted and undistorted versions of a second point cloud. Bernstein Polynomials are utilized to perform the correction.

BernsteinPolynomial()

Find the solution to the Bernstein polynomial when at varying degrees and points depending on the input.

Fmatrix()

Multiplies the Bernstein polynomial into a matrix so that a function of every degree of i, j, and k are found and a distortion calibration can be done using the matrix.

ScaleToUnitBox()

Calculates maximum and minimum values in the X,Y, and z coordinates of a point cloud and then normalizes the value of every single opint.

probeTipPointinCTF()

Uses measured positions of EM tracker points on the EM probe in the EM frame when the tip is in a CT fiducial and returns the point of the fiducial dimple (solves problem 5).

fiducialPointInEMFrame()

Uses measured positions of EM tracker points on the EM probe in the EM frame when the tip is in a CT fiducial and returns points of the CT fiducial locations in EM frame.

PA3

icpPointMeshRegistration()

Primary function implementing the math specific to the system specified in PA3.

FindClosestPoint()

Finds the closest point on the triangle to a point in space. If the closest point lies with in triangle, then the function finds the nearest point internally. Else if the closest point lies on an edge or vertice, the function OutsideOfTriangle() is called to find the nearest point.

OutsideOfTriangle()

Finds the closest point on the triangle to a point in space if the closest point lies on an edge or vertice

ProjectOnSegment()

Finds the nearest point on a line segment to a point in space. Called by the function OutsideOfTriangle() to determine where the nearest point is to each side of the triangle.

PointEqualityCheck()

Determines if two points are equal. Used by the function OutsideOfTriangle to determine if the nearest point on the triangle lies on a vertice

5 Results and Discussion

5.1 Validation

We took several approaches to the validation of our software. These include manual and automatic execution of the supplied test data, the implementation of unit tests to verify the data, and initial integration of continuous integration software to catch errors early. We implemented a battery of unit tests to verify the basic functions and ensure they are running correctly.

5.2 Point Cloud Registration

We have been able to ensure that point cloud to point cloud registration is working correctly by finding the transformation of one point cloud to another and then the opposite. Multiplying these two transformation matrices together resulted in an identity matrix which would be expected. We tested the input data set as well, ensuring that we were within the given tolerance range. This shows the strength of Horn's method and since it requires no special case exceptions for a solution, we concluded it was the best method of the one's taught in class.

5.3 Calibration

The position of the tip of the probe when calibrate by EM also gave us results well within our tolerance levels. Our results were less accurate when error was introduced, but not to an unreasonable degree.

5.4 Finding the Closest Point on a Triangle

We have also been able to ensure that finding the closest point on a triangle algorithm is working correctly by assigning vertices to an arbitrary triangle and then testing points in space where we knew what the closest point on the triangle was. We tested the different special cases of the problem as the closest point lying within the boundaries of the triangle, on one of the sides of the triangle, and on one of the vertices of the triangle. Our algorithm was able to return the nearest point for every case.

6 Status of results

6.1 PA 2

We have encountered errors in our software that we have narrowed down to points after the EM distortion calibration steps, because we have been able to verify our Bernstein functions using unit tests and debug data. However, a bug remains in either the steps for calculating Freg or finding each of the CT fiducial. Since the underlying components are largely well tested, we expect the bug to be in the transform or data flow steps of the generateOutputFile() function in cisHW1-2.cpp or the function definitions in PA2.hpp.

6.2 PA 3

Our initial algorithm passed our unit tests and gave us similar errors to the output data files. We concluded that our we were able to successfully implement the first iteration of an ICP registration. Although the simplest linear method was implemented, our program was able to run the program of all debug and unknown data sets in less than thirty seconds even in debug mode. Adding threads and running in release mode made our program run even faster. A data structure was not needed for this assignment because we concluded that there was no problem with the speed of the program. For PA 4, we will reevaluate this conclusion as the ICP will need to iterate multiple times, greatly increasing our runtime.

6.3 Tabular Summary of PA 3 Unknown Data Results

Point Number	Error in G Data	Error in H Data	Error in I Data
1	0.14811	0.77494	2.84084
2	0.60432	0.96266	0.46215
3	2.24293	0.67760	4.43498
4	0.76945	0.24216	1.77055
5	1.45001	0.51152	0.40509
6	0.80641	1.54260	0.10251
7	0.86017	0.24527	0.30031
8	2.61080	0.72909	0.79210
9	2.10517	0.48146	2.54912
10	0.96220	0.30248	2.07283
11	0.00198	1.43465	5.54007
12	2.45932	0.01729	1.06041
13	1.47099	1.38414	2.93195
14	1.34390	0.42595	1.44610
15	0.41964	2.43422	1.83156
16	1.44879	0.13935	0.57452
17	0.01526	0.29749	0.47596
18	1.96765	0.88617	0.87031
19	1.30039	0.65453	3.82845
20	1.02220	0.18214	1.17058
Average Error	1.20048	0.71629	1.77302
Max Error	2.61080	2.43422	5.54007

The error in debug data sets is consistent with the error in the output files. On the unknown output, the overall error bounds seem reasonable when compared to the debug data sets. We expect our algorithms are not the most substantial source of error in these results and instead are attributed to noise or other sources of error.

6.4 Error Propagation

Barring errors due to software bugs, error propagation can occur based on several sources. If there is systemic biased measurement in a single direction, this can offset error and cause it to propagate along transform chains and even amplify error.

PA 2

Error sources and propagation can come from a variety of sources, including EM distortion, EM Noise, and OT jiggle. We were able to account for the EM distortion through our distortion calibration functions. It is expected that some amount of EM Noise, distortion, and jiggle will be propagated throughout the system that we are unable to account for.

One example of how error can propagate is if both the optical tracker and EM tracker are off with a common distortion component, it is possible for this information to cause the Bernstein curve to misestimate the actual curve, and consequently cause the registration between the CT scan and the other sensors to have a higher error. In this way errors can propagate through the whole system. This particular example can be mitigated through the use of fixed physical structures that are known in advance that can be used to estimate and account for such systemic errors.

Additionally, inaccurate sensors due to large random variation are an example of error which cannot be removed through distortion calibration.

PA 3

Possible error sources and propagation were due to simulated noise. The early debug sets had the least amount of simulated noise corresponding to very low error while the later debug sets and unknown sets had a greater simulated noise corresponding to a slightly larger error. The simulated noise could have been attributed to a number of sources including Optical distortion, Optical Noise, Optical jiggle, CT distortion, or CT Noise.

6.5 Results Metric

PA 2

We know that our distortion is correct and we can measure its accuracy because we can compare the old values of EM pivot to the newly undistorted values that we encounter. By comparing to prior ground truth values we can assess the accuracy of our calibration.

Our metric for error is the distance difference between our calculations and the debug outputs. This can be measured as an average, or with other statistical tools. We can also detect certain sources of error by specifying our own test functions. We also utilize the **BOOST_VERIFY** macro and the `checkWithinTolerances()` function to verify that functions are being called and returning values that are correct to within certain tolerances, considering the limits of the particular algorithms we are using.

PA 3

Our metric for error is the norm between the sample points and the nearest points on the CT mesh. The norm was small in most cases so we concluded that our implementation of ICP registration was successful. In PA 4, we will expand on our current ICP by iterating and setting an error bound to obtain more accurate results.

Andrew and Alex spent approximately equal time on the assignment, with significant amounts of time spent pair programming. Both contributed equally to the implementation and debugging of functions.

7 Additional Information

7.1 Features

Horn Registration

- Point cloud to point cloud transformations .

Pivot calibrations

- Pivot calibrations allow a coordinate system to be established with respect to existing data and the world frame.

Distortion Correction

- Bernstein Polynomial based distortion correction.

Iterative Closest Point

- Solver for finding the closest matching set of points to a mesh.

7.2 People

Software Development

- Andrew Hundt
- Alex Strickland

7.3 Quick Start

First Steps

The following steps will show you how to

- download and install CIS on your system.
- use the installation to create an example.
- build and test the example project.

You need to have a Unix-like operating system such as Linux or Mac OS X installed on your machine in order to follow these steps. At the moment, there is no separate tutorial available for Windows users, but you can install CygWin as an alternative. Note, however, that CIS can also be installed and used on Windows.

Install CIS

Get a copy of the source code Clone the [Git](#) repository from [GitHub](#) as follows:

```
mkdir -p ~/local/src
cd ~/local/src
git clone https://github.com/ahundt/cis
cd cis
```

or [Download](#) a pre-packaged `.tar.gz` of the latest release and unpack it using the following command:

```
mkdir -p ~/local/src
cd ~/local/src
tar xzf /path/to/downloaded/cis-$version.tar.gz
cd cis-$version
```

Configure the build Configure the build system using CMake 3.0.0 or a more recent version:

```
mkdir build && cd build
cmake ..
```

- Press `c` to configure the project.
- Change `CMAKE_INSTALL_PREFIX` to `~/local`.
- Set option `BUILD_EXAMPLE` to `ON`.
- Make sure that option `BUILD_PROJECT_TOOL` is enabled.
- Press `g` to generate the Makefiles.

Note that if you do not have the **BASIS** dependency, an error will appear. Simply running the CMake steps a second time will cause BASIS to automatically download and install.

Build and install CIS CMake has generated Makefiles for GNU Make. The build is thus triggered by the make command:

```
make
```

To install CIS after the successful build, run the following command:

```
make install
```

As a result, CMake copies the built files into the installation tree as specified by the CMAKE_INSTALL_PREFIX variable.

Set up the environment For the following tutorial steps, set up your environment as follows. In general, however, only the change of the PATH environment variable is recommended. The other environment variables are only needed for the tutorial sessions.

Using the C or TC shell (csh/tcsh):

```
setenv PATH "~/local/bin:${PATH}"
setenv CIS_EXAMPLE_DIR "~/local/share/cis/example"
```

Using the Bourne Again SHell (bash):

```
export PATH="~/local/bin:${PATH}"
export CIS_EXAMPLE_DIR="~/local/share/basis/example"
```

Test the Example The following is an example of how to run the main cisHW1-2 executable, cisHW3-4 is similar.

```
./cisHW1-2 --dataFilenamePrefix pal-debug-a --dataFolderPath /path/to/cis/data/PA1-2/
```

PivotCalibration result **for** pal-debug-a-empivot.txt:

```
197.115
192.677
192.437
197.113
192.677
192.434
```

Command Line Format The command line format follows standard conventions, plus the ability to store a response file, typically named *.rsp*, which saves additional command line parameters for future use and convenience. The available command line parameters and descriptions for the primary ****cisHW1-2*** executable file are below.

```
./cisHW1-2
```

General Options:

--responseFile arg	File containing additional command line parameters
--help	produce help message
--debug	enable debug output
--debugParser	display debug information for data file parser

Algorithm Options:

--threads	run each source data file in a separate thread
-----------	---

Data Options:

```
--pa1          set automatic programming assignment 1
                source data parameters, overrides
                DataFilenamePrefix, exclusive of pa1
--pa2          set automatic programming assignment 2
                source data parameters, overrides
                DataFilenamePrefix, exclusive of pa2
--dataFolderPath arg (=/Users/athundt/source/cis/build/bin)
                folder containing data files, defaults
                to current working directory
--outputDataFolderPath arg (=/Users/athundt/source/cis/build/bin)
                folder for output data files, defaults
                to current working directory
--dataFilenamePrefix arg
                constant prefix of data filename path.
                Specify this multiple times to run on
                many data sources at once
--dataFileNameSuffix_calbody arg (==calbody.txt)
                suffix of data filename path
--dataFileNameSuffix_calreadings arg (==calreadings.txt)
                suffix of data filename path
--dataFileNameSuffix_empivot arg (==empivot.txt)
                suffix of data filename path
--dataFileNameSuffix_optpivot arg (==optpivot.txt)
                suffix of data filename path
--dataFileNameSuffix_output1 arg (==output1.txt)
                suffix of data filename path
--dataFileNameSuffix_ct_fiducials arg (==ct-fiducials.txt)
                suffix of data filename path
--dataFileNameSuffix_em_fiducials arg (==em-fiducialss.txt)
                suffix of data filename path
--dataFileNameSuffix_em_nav arg (==EM-nav.txt)
                suffix of data filename path
--dataFileNameSuffix_output2 arg (==output2.txt)
                suffix of data filename path
--calbodyPath arg
                full path to data txt file, optional
                alternative to prefix+suffix name
                combination
--calreadingsPath arg
                full path to data txt file, optional
                alternative to prefix+suffix name
                combination
--empivotPath arg
                full path to data txt file, optional
                alternative to prefix+suffix name
                combination
--optpivotPath arg
                full path to data txt file, optional
                alternative to prefix+suffix name
                combination
--output1Path arg
                full path to data txt file, optional
                alternative to prefix+suffix name
                combination
--ct_fiducialsPath arg
                full path to data txt file, optional
                alternative to prefix+suffix name
                combination
--em_fiducialsPath arg
                full path to data txt file, optional
                alternative to prefix+suffix name
                combination
--em_navPath arg
                full path to data txt file, optional
                alternative to prefix+suffix name
                combination
```


<code>--output2Path arg</code>	full path to data txt file, optional alternative to prefix+suffix name combination
--------------------------------	--

The available command line parameters and descriptions for the primary **cisHW3-4** executable file are below.

`./cisHW3-4`

General Options:

<code>--responseFile arg</code>	File containing additional <code>command</code> line parameters
<code>--help</code>	produce <code>help</code> message
<code>--debug</code>	<code>enable</code> debug output
<code>--debugParser</code>	display debug information for data file parser

Algorithm Options:

<code>--threads</code>	run each <code>source</code> data file in a separate thread
------------------------	--

Data Options:

<code>--pa3</code>	<code>set</code> automatic programming assignment 3 <code>source</code> data parameters, overrides DataFilenamePrefix, exclusive of pa4
<code>--pa4</code>	<code>set</code> automatic programming assignment 4 <code>source</code> data parameters, overrides DataFilenamePrefix, exclusive of pa3
<code>--dataFolderPath arg</code> (<code>=/Users/athundt/source/cis/build/bin</code>)	folder containing data files, defaults to current working directory
<code>--outputDataFolderPath arg</code> (<code>=/Users/athundt/source/cis/build/bin</code>)	folder for output data files, defaults to current working directory
<code>--dataFilenamePrefix arg</code>	constant prefix of data filename path. Specify this multiple <code>times</code> to run on many data sources at once
<code>--dataFilenameProblemPrefix arg</code> (<code>=Problem3</code>)	constant prefix of data typically starting with <code>"Problem"</code> filename path. Specify this multiple <code>times</code> to run on many data sources at once
<code>--suffixAnswer arg</code> (<code>--Answer.txt</code>)	suffix of data filename path
<code>--suffixOutput arg</code> (<code>--Output.txt</code>)	suffix of data filename path
<code>--suffixSample arg</code> (<code>--SampleReadingsTest.txt</code>)	suffix of data filename path
<code>--suffixMesh arg</code> (<code>=Mesh.sur</code>)	suffix of data filename path
<code>--suffixBodyA arg</code> (<code>--BodyA.txt</code>)	suffix of data filename path
<code>--suffixBodyB arg</code> (<code>--BodyB.txt</code>)	suffix of data filename path
<code>--AnswerPath arg</code>	full path to data txt file, optional alternative to prefix+suffix name combination
<code>--OutputPath arg</code>	full path to data txt file, optional alternative to prefix+suffix name combination
<code>--SamplePath arg</code>	full path to data txt file, optional alternative to prefix+suffix name combination
<code>--MeshPath arg</code>	full path to data txt file, optional alternative to prefix+suffix name

<code>--BodyAPath arg</code>	combination full path to data txt file, optional alternative to prefix+suffix name combination
<code>--BodyBPath arg</code>	full path to data txt file, optional alternative to prefix+suffix name combination
<code>--em_fiducialsPath arg</code>	full path to data txt file, optional alternative to prefix+suffix name combination
<code>--em_navPath arg</code>	full path to data txt file, optional alternative to prefix+suffix name combination
<code>--output2Path arg</code>	full path to data txt file, optional alternative to prefix+suffix name combination

Unit Test The easiest way to run the unit test is to build the software, then symlink the data folder “PA1-2” from “data/PA1-2” into the same directory as the unit tests. In other words, the unit tests expect the directory “PA1-2” to be in the same directory as the unit test executable when it is run. The same should be done for the OUTPUT folder to PA1-2-OUTPUT for comparison of debug output files for identifying problems in the system.

```
ln -s /path/to/cis/data/PA1-2
ln -s /path/to/cis/OUTPUT PA1-2-OUTPUT
./cisHWltest
```

Next Steps

Congratulations! You just finished your first CIS tutorial.

Now check out the [Advanced Information](#) for more details regarding each of the above steps and in-depth information about the used commands if you like, or move on to the various [How-to Guides](#).

Advanced Information


For advanced documentation, please see the doxygen API documentation, unit tests, and software manual. If you cannot view these files and documents, they are visible as inline source code documentation and and restructured text files found in the /doc folder.

For a less comprehensive tutorial-like introduction, please refer to the [First Steps](#) above.

7.4 Read the Data format

The following image illustrates the basics of the input testing data format.

Point Cloud File Format

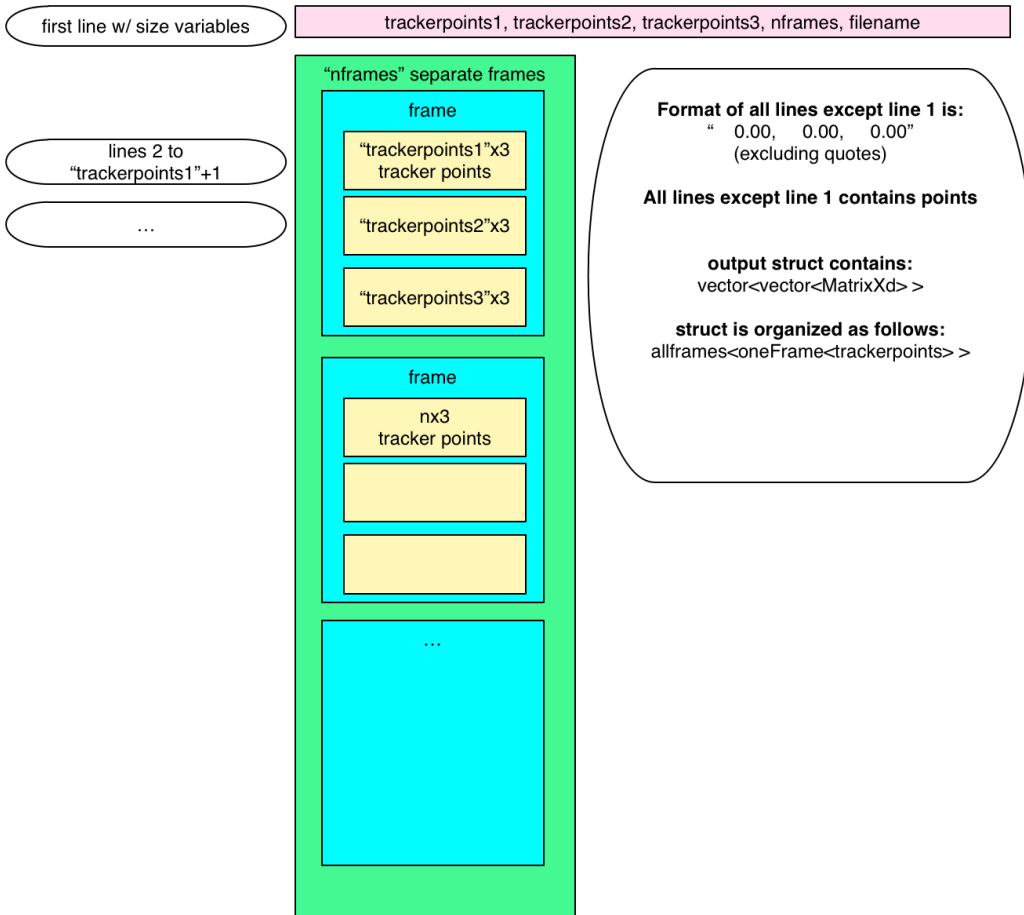

7.5 Getting Help

Please report any issues with CIS, including bug reports, feature requests, or support questions, on [GitHub](#).

7.6 Reference

Source Package

config/	Package configuration files.
data/	Data files required by the software.
doc/	Documentation source files.
example/	Example files for users to try out the software.
include/	Header files of the public API of libraries.
lib/	Module files for scripting languages.
modules/	Project modules (i.e., subprojects).
src/	Source code files.
test/	Implementations of unit and regression tests.
AUTHORS.md	A list of the people who contributed to this software.
BasisProject.cmake	Sets basic project information and lists external dependencies.
CMakeLists.txt	Root CMake configuration file.
COPYING.txt	The copyright and license notices.
INSTALL.md	Build and installation instructions.
README.md	Basic summary and references to the documentation.

7.7 Download

Source Code

The source code of the CMake BASIS package is hosted on [GitHub](#) from which all releases and latest development versions can be downloaded. See the [changelog](#) for a summary of changes in each release.

Either clone the Git repository:

```
git clone https://github.com/schuhschuh/cis.git
```

or download a pre-packaged `.tar.gz` of the latest BASIS release:

- [Download CIS v1.0.0 as .tar.gz](#)
- [Download CIS v1.0.0 as .zip](#)

See also:

The [Quick Start Guide](#) can help you get up and running.

System Requirements

Operating System: Linux, Mac OS X, Microsoft Windows

Software License

Copyright (c) 2014 Andrew Hundt and Alex Strickland All rights reserved.

See COPYING file for license information.

Documentation

[BASIS Manual](#): Online version of this manual

7.8 Installation

See the [BASIS guide on software installation](#) for a complete list of build tools and detailed installation instructions.

Prerequisites

Dependency	Version	Description
BASIS	3.1.0	Utility to automate and standardize creating, documenting, and sharing software.
Boost	1.56.0+	C++ Library collection for general use
CMake	3.0.0	Build Tools.
Eigen	3.2.0	Linear Algebra Library.

Configure

1. Extract source files:

```
tar -xzf cis-1.0.0-source.tar.gz
```

2. Create build directory:

```
mkdir cis-1.0.0-build
```

3. Change to build directory:

```
cd cis-1.0.0-build
```

4. Run [CMake](#) to configure the build tree:

```
ccmake -DBASIS_DIR:PATH=/path/to/basis ../cis-1.0.0-source
```

- Press `c` to configure the build system and `e` to ignore warnings.
- Set `CMAKE_INSTALL_PREFIX` and other CMake variables and options.
- Continue pressing `c` until the option `g` is available.
- Then press `g` to generate the [GNU Make](#) configuration files.

Build

After the configuration of the build tree, the software can be build using [GNU Make](#):

```
make
```

Test

After the build of the software, optionally run the tests using the command:

```
make test
```

In case of failing tests, re-run the tests, but this time by executing [CTest](#) directly with the `-V` option to enable verbose output and redirect the output to a text file:

```
ctest -V >& cis-test.log
```

and attach the file `cis-test.log` to the issue report.

Install

The final installation copies the built files and additional data and documentation files to the installation directory specified using the `CMAKE_INSTALL_PREFIX` option during the configuration of the build tree:

```
make install
```

After the successful installation, the build directory can be removed again.