

Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

TIM2 Mode and Configuration

Mode

Slave Mode

Disable

Trigger Source

Disable

Clock Source

Internal Clock

Channel1

PWM Generation CH1

Channel2

Disable

Channel3

Disable

Channel4

Disable

Configuration

Reset Configuration

NVIC Settings

DMA Settings

GPIO Settings

Parameter Settings

User Constants

Configure the below parameters :

Search (Ctrl+F)

Counter Settings

Prescaler (PSC - 16 bits value)

71

Counter Mode

Up

Counter Period (AutoReload Regist...

999

Internal Clock Division (CKD)

No Division

auto-reload preload

Disable

Trigger Output (TRGO) Parameters

Master/Slave Mode (MSM bit)

Disable (Trigger input effect not delayed)

Pinout view

System view

VDD

VSS

PB9

PB8

BOOT0

PB7

PB6

PB5

PB4

PB3

PA15

PA14

VBAT

PC13-...

PC14-...

PC15-...

PD0-...

PD1-...

NRST

VSSA

VDDA

PA0-...

PA1

PA2

PA3

PA4

PA5

PA6

PA7

PB0

PB1

PB2

PB10

PB11

VSS

VDD

GPIO_Input

I2C2_SCL

I2C2_SDA

STM32F103C8Tx

LQFP48

RCC_OSC_IN

RCC_OSC_OUT

TIM2_CH1

GPIO_Input

GPIO_Input

RCC_MCO

Software Packs

Pinout

NVIC Mode and Configuration

Configuration

NVIC Code generation


Priority Group ☐ Sort by Preemption Priority and Sub Priority ☐ Sort by interrupts nameSearch Show available interrupts ☒ Force DMA channels

NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
Non maskable interrupt	☒	0	0
Hard fault interrupt	☒	0	0
Memory management fault	☒	0	0
Prefetch fault, memory access fault	☒	0	0
Undefined instruction or illegal state	☒	0	0
System service call via SWI instruction	☒	0	0
Debug monitor	☒	0	0
Pendable request for system service	☒	0	0
Time base: System tick timer	☒	15	0
PVD interrupt through EXTI line 16	☐	0	0
Flash global interrupt	☐	0	0
RCC global interrupt	☐	0	0
TIM2 global interrupt	☒	0	0
TIM3 global interrupt	☒	0	0
I2C2 event interrupt	☐	0	0
I2C2 error interrupt	☐	0	0

☐ Enabled Preemption Priority Sub Priority

Pinout view

System view

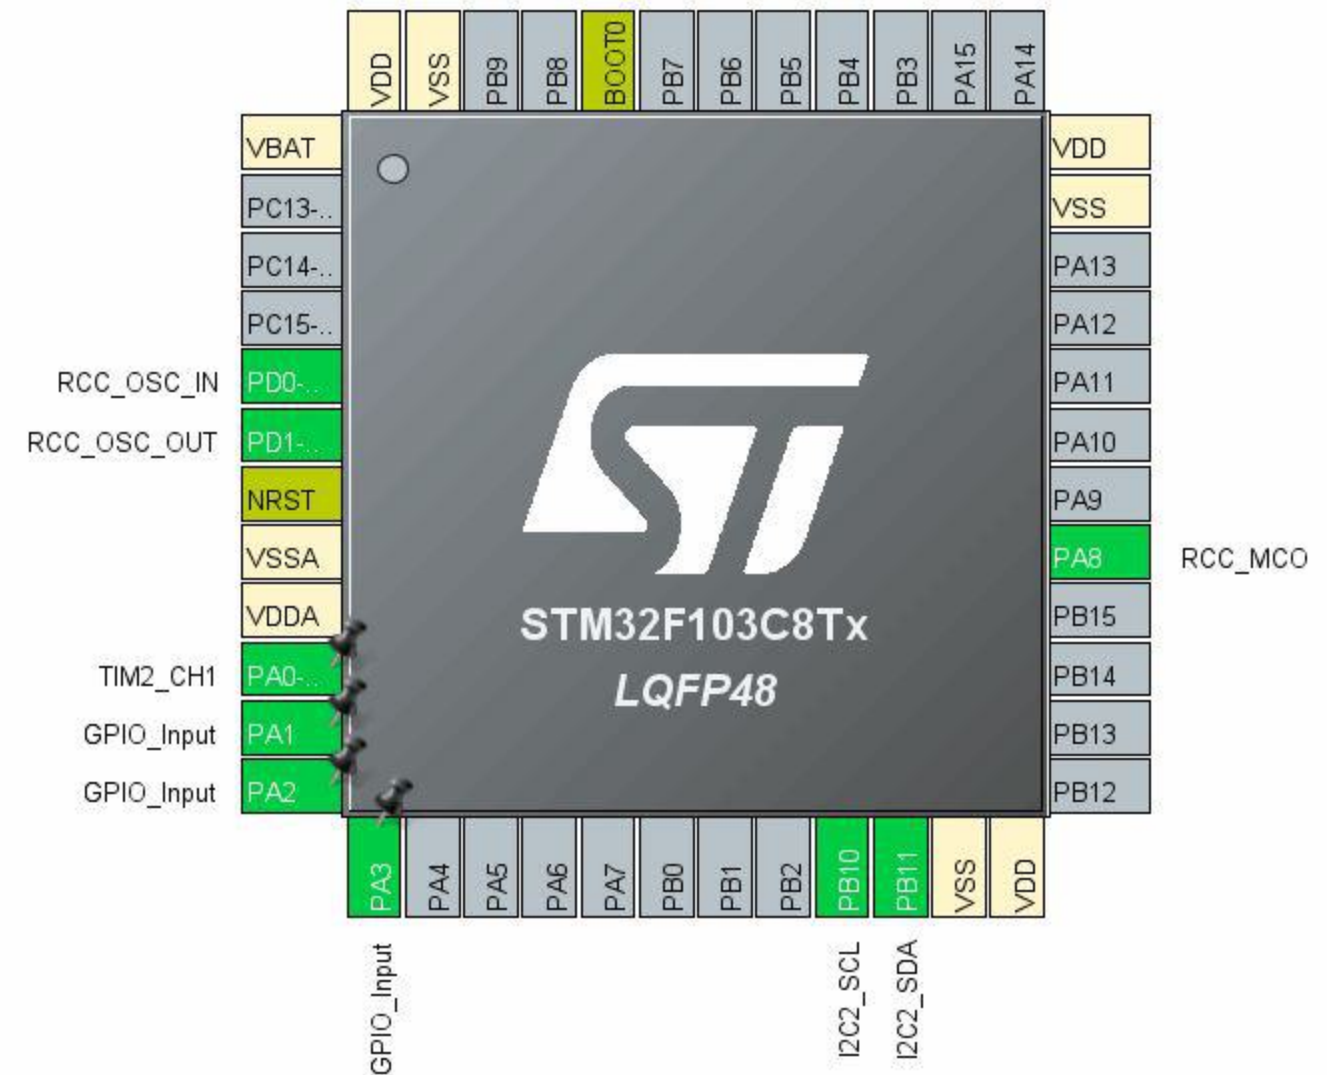

TIM3 Mode and Configuration

Mode

Slave Mode

Disable

Trigger Source

Disable

☒ Internal Clock

Channel1

Disable

Channel2

Disable

Channel3

Disable

Channel4

Disable

Configuration

Reset Configuration

☒ Parameter Settings

☒ User Constants

☒ NVIC Settings

☒ DMA Settings

NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
TIM3 global interrupt	☒	0	0

Pinout view

System view

VDD

VSS

PB9

PB8

BOOT0

PB7

PB6

PB5

PB4

PB3

PA15

PA14

VBAT

PC13-...

PC14-...

PC15-...

PD0-...

PD1-...

NRST

VSSA

VDDA

PA0-...

PA1

PA2

PA3

PA4

PA5

PA6

PA7

PB0

PB1

PB2

PB10

PB11

VSS

VDD

PA13

PA12

PA11

PA10

PA9

PA8

PB15

PB14

PB13

PB12

STM32F103C8Tx

LQFP48

RCC_OSC_IN

RCC_OSC_OUT

GPIO_Output

GPIO_Input

GPIO_Input

RCC_MCO

_Input

_SCL

_SDA

Mode

Channel4	Disable
----------	---------

DMA Settings

Trigger Event Selection Reset (UG bit from TIMx_EGR)

RCC MCO

2C2_SDA

TIM3 Mode and Configuration

Mode

Slave Mode

Disable

Trigger Source

Disable

☒ Internal Clock

Channel1

Disable

Channel2

Disable

Channel3

Disable

Channel4

Disable

Configuration

Reset Configuration

☒ Parameter Settings

☒ User Constants

☒ NVIC Settings

☒ DMA Settings

NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
TIM3 global interrupt	☒	0	0

Pinout view

System view

VDD

VSS

PB9

PB8

BOOT0

PB7

PB6

PB5

PB4

PB3

PA15

PA14

VBAT

PC13-..

PC14-..

PC15-..

RCC_OSC_IN

RCC_OSC_OUT

NRST

VSSA

VDDA

TIM2_CH1

GPIO_Input

GPIO_Input

PA3

PA4

PA5

PA6

PA7

PB0

PB1

PB2

PB10

PB11

VSS

VDD

GPIO_Input

I2C2_SCL

I2C2_SDA

VDD

VSS

PA13

PA12

PA11

PA10

PA9

PA8

PB15

PB14

PB13

PB12

RCC_MCO

STM32F103C8Tx

LQFP48

+

□

−

📄

📄

📏

📏

🔍