EXP_C38ED2D0 · PRE-REGISTERED DESIGN BRIEF

· SEALED 2026-06-09T05:35:04.009579+00:00 · DURATION

# exp_c38ed2d0

AT A GLANCE

**Primary metric is ; decision is binary against the pre-registered rules below.**

---

SAMPLE REQUIRED (PER ARM)

**0**

*to detect a relative effect at a = 0.05, power = 0.80*

BASELINE

**0.0%**

TOTAL SAMPLE

**0**

DURATION

FEASIBILITY

**VIABLE**

MECHANISM

## Why we think this works

METRICS


## is the verdict-driving metric.

*Primary is ; secondaries inform interpretation but do not influence the verdict. Guardrails block ship if their CI crosses the pre-registered non-inferiority margin in the adverse direction.*

| | |
|---|---|
| PRIMARY | Proportion · baseline 0.0% · MDE · direction higher is better |

POWER

## Detecting smaller effects requires much more sample.

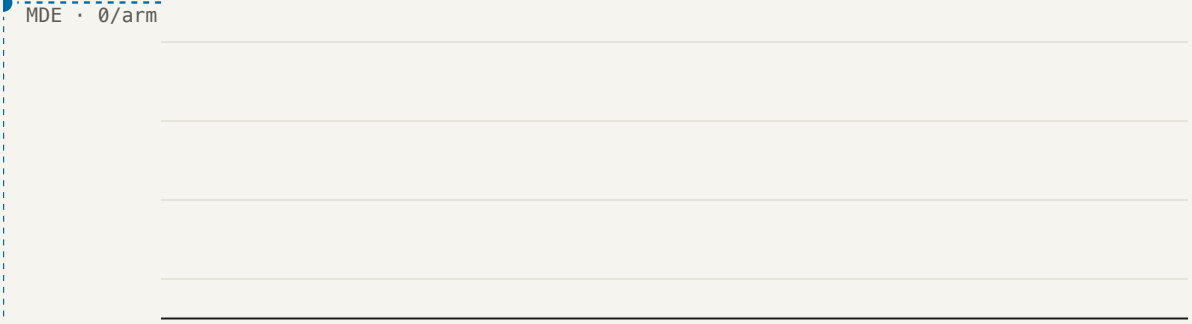


*Smaller effects require disproportionately more sample. Our design point is feasible inside the available user_id surface.*

DECISION RULES

## Pre-registered. The analyze verb walks the same tree against the same metrics.

| | |
|---|---|
| SHIP | Primary 95% CI excludes zero on benefit side · no guardrail breach · novelty late-ratio ≥ 0.7 |
| LIFT WITH CAVEAT | Real lift but below MDE/2 — surface the caveat in the readout but still consider rolling out |
| NO-SHIP · GUARDRAIL | Any guardrail's 90% CI lies past its harm threshold |
| NO-LIFT | Well-powered, primary CI straddles zero with half-width > 2 × MDE |
| INCONCLUSIVE | Underpowered (n < required) AND primary CI straddles zero |
| INVALID | SRM $\chi^2$ p < 0.0005 and no override resolved — investigate assignment |