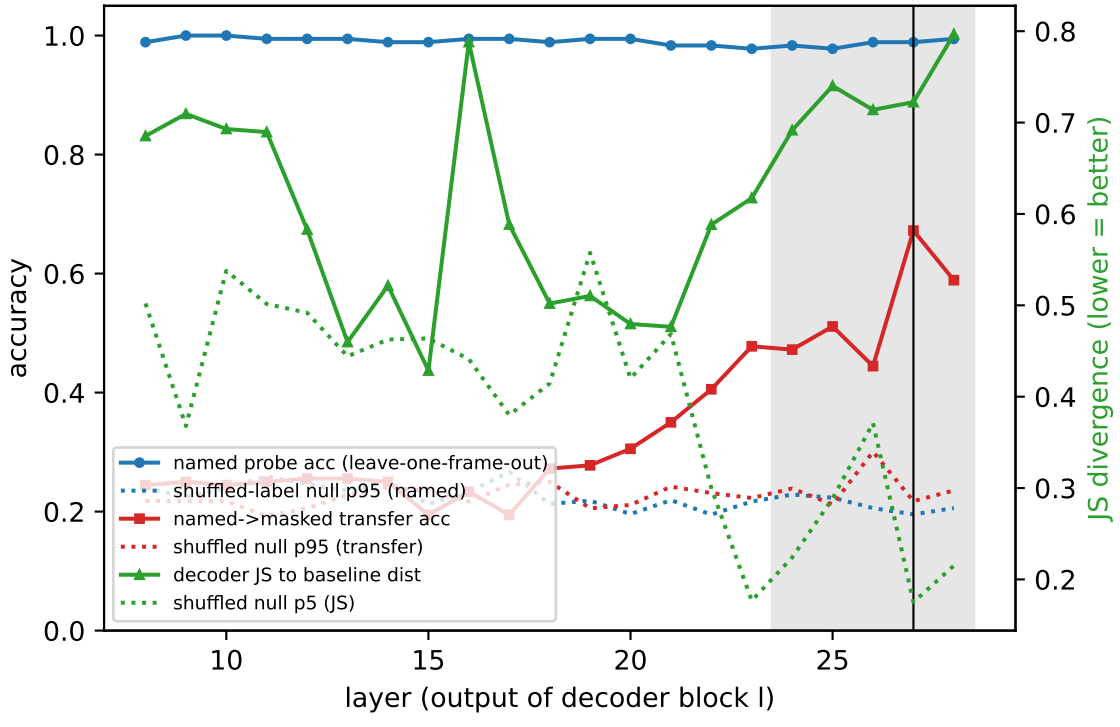
t1: R-position probe gate (l*=27, pass=False)
accuracy
JS divergence (lower = better)
layer (output of decoder block l)
named probe acc (leave-one-frame-out)
shuffled-label null p95 (named)
named->masked transfer acc
shuffled null p95 (transfer)
decoder JS to baseline dist
shuffled null p5 (JS)

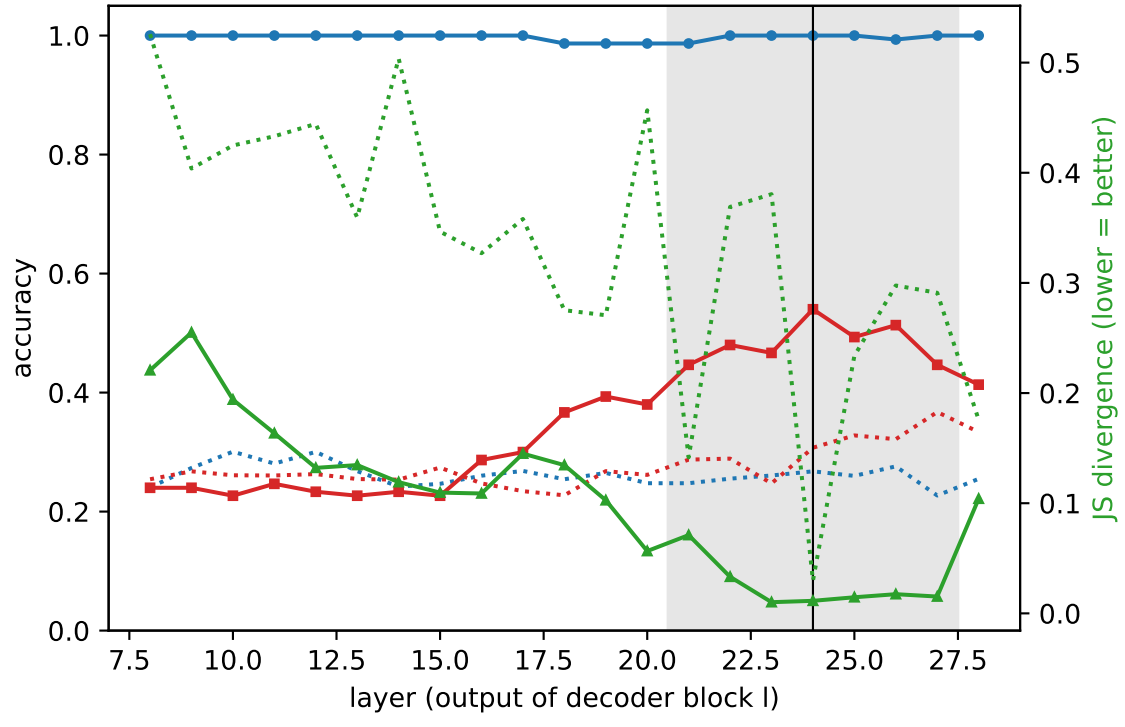
t2: R-position probe gate (l*=24, pass=True)
accuracy
JS divergence (lower = better)
layer (output of decoder block l)