




EXP6 held-out: retained-label permutation
(obs LR = 57.6; $p = 0.0010$)

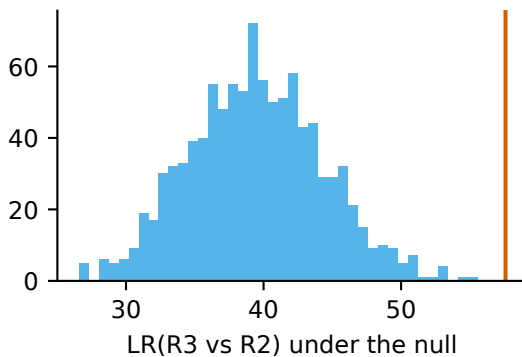


EXP6 held-out: degree-preserving rewiring
(obs LR = 57.6; $p = 0.0020$)

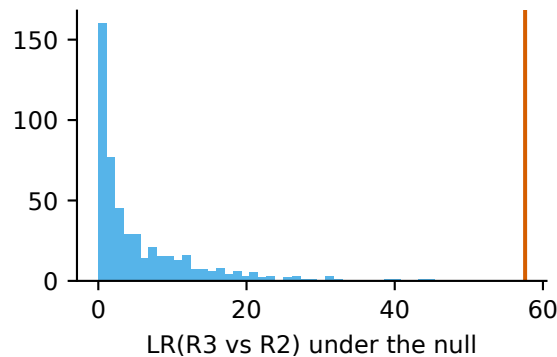


EXP6 held-out: node-label permutation
(obs LR = 57.6; $p = 0.0010$)

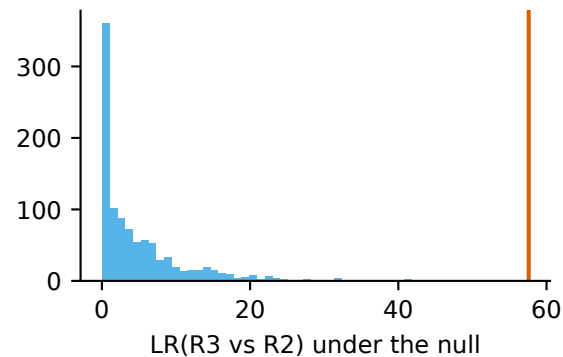


DEV: retained-label permutation
(obs LR = 365.6; $p = 0.0010$)

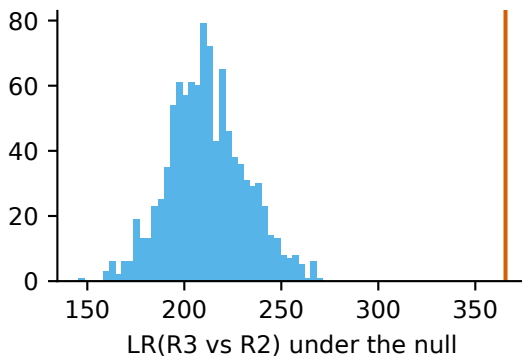


DEV: degree-preserving rewiring
(obs LR = 365.6; $p = 0.0020$)

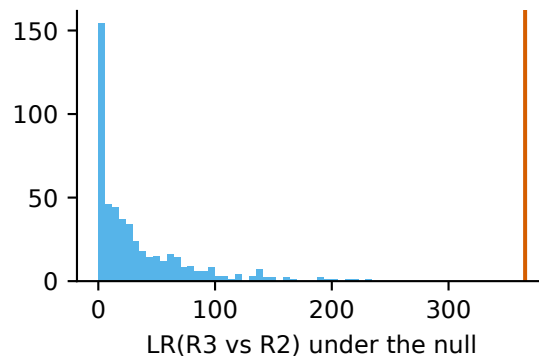


DEV: node-label permutation
(obs LR = 365.6; $p = 0.0010$)

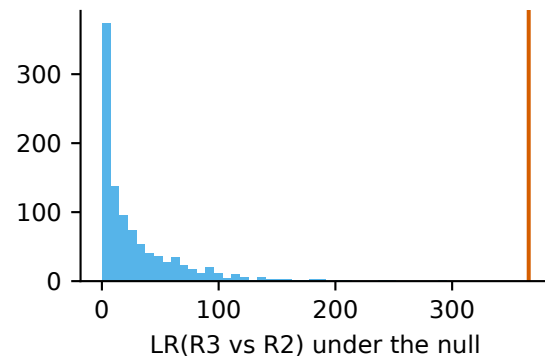

held-out pooled-4: retained-label permutation
(obs LR = 325.8; $p = 0.0010$)

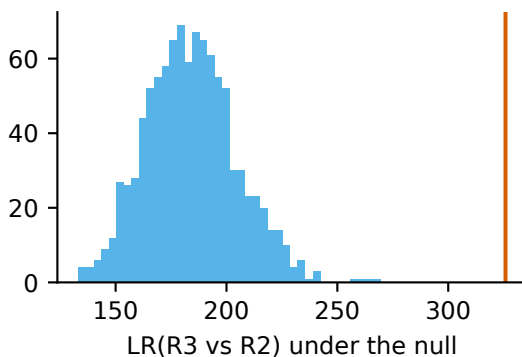

held-out pooled-4: degree-preserving rewiring
(obs LR = 325.8; $p = 0.0040$)

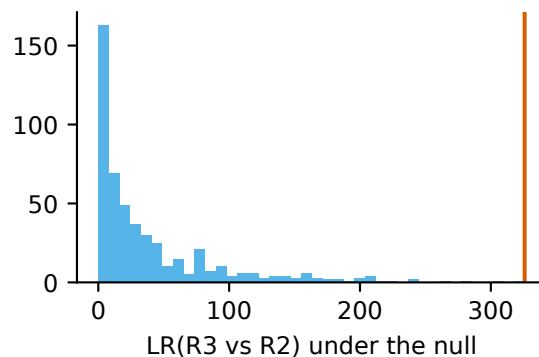

held-out pooled-4: node-label permutation
(obs LR = 325.8; $p = 0.0030$)

