



# MediaTek LinkIt™ Development Platform for RTOS Get Started Guide

Version: 4.2

Release date: 13 January 2017

---

© 2015 - 2017 MediaTek Inc.

This document contains information that is proprietary to MediaTek Inc. ("MediaTek") and/or its licensor(s). MediaTek cannot grant you permission for any material that is owned by third parties. You may only use or reproduce this document if you have agreed to and been bound by the applicable license agreement with MediaTek ("License Agreement") and been granted explicit permission within the License Agreement ("Permitted User"). If you are not a Permitted User, please cease any access or use of this document immediately. Any unauthorized use, reproduction or disclosure of this document in whole or in part is strictly prohibited. THIS DOCUMENT IS PROVIDED ON AN "AS-IS" BASIS ONLY. MEDIATEK EXPRESSLY DISCLAIMS ANY AND ALL WARRANTIES OF ANY KIND AND SHALL IN NO EVENT BE LIABLE FOR ANY CLAIMS RELATING TO OR ARISING OUT OF THIS DOCUMENT OR ANY USE OR INABILITY TO USE THEREOF. Specifications contained herein are subject to change without notice.

## Document Revision History

---

Revision	Date	Description
1.0	24 March 2016	Initial release
2.0	17 May 2016	<ul style="list-style-type: none"><li>Flash tool and building the project content is moved to the corresponding documents.</li><li>Added the support for Keil IDE.</li></ul>
3.0	30 June 2016	<ul style="list-style-type: none"><li>Added the support of IAR embedded workbench IDE.</li><li>More details on the SDK features and usage is included.</li></ul>
4.0	2 September 2016	<ul style="list-style-type: none"><li>Updated Section 2 to describe how to use serial emulator software, such as TeraTerm with LinkIt 7687 HDK and LinkIt 2523 HDK.</li></ul>
4.1	4 November 2016	<ul style="list-style-type: none"><li>Updated Section 2.4, building the project using the SDK.</li></ul>
4.2	13 January 2017	<ul style="list-style-type: none"><li>Added information about 2533D</li><li>Added note for GCC/KEIL/IAR debugging limitation in sleep mode.</li><li>Updated file system additional descriptions.</li><li>Added support for MT76x7 Flash Tool in Linux.</li></ul>

## Table of contents

---

<b>1.</b>	<b>Overview .....</b>	<b>1</b>
1.1.	Architecture of the platform .....	1
1.2.	Supported key components .....	5
1.2.1.	Wi-Fi.....	5
1.2.2.	Network .....	6
1.2.3.	Bluetooth/Bluetooth Low Energy .....	6
1.2.4.	Sensor subsystem .....	7
1.2.5.	GNSS .....	7
1.2.6.	FOTA .....	8
1.2.7.	Peripheral drivers .....	8
1.2.8.	Battery management.....	10
1.2.9.	Advanced features and components.....	10
1.3.	Folder structure .....	11
1.4.	Project source structure .....	13
<b>2.</b>	<b>Getting Started Using GCC.....</b>	<b>14</b>
2.1.	Environment .....	14
2.2.	Developing on LinkIt 7687 HDK .....	14
2.2.1.	Configuring the LinkIt 7687 HDK.....	14
2.2.2.	Installing the LinkIt 7687 HDK drivers on Microsoft Windows .....	16
2.2.3.	Installing MT76x7 Flash Tool for LinkIt 7687 HDK .....	17
2.2.4.	Flashing the image to LinkIt 7687 HDK .....	19
2.2.5.	Running the project on LinkIt 7687 HDK.....	21
2.2.6.	Debugging with the LinkIt 7687 HDK from Microsoft Windows.....	23
2.3.	Developing on LinkIt 2523 HDK .....	26
2.3.1.	Configuring the LinkIt 2523 HDK.....	26
2.3.2.	Installing MT2523 Flash Tool for LinkIt 2523 HDK .....	26
2.3.3.	Installing the LinkIt 2523 HDK drivers on Microsoft Windows .....	26
2.3.4.	Flashing the image to LinkIt 2523 HDK .....	33
2.3.5.	Running the project on LinkIt 2523 HDK.....	35
2.3.6.	Debugging with the LinkIt 2523 HDK from Microsoft Windows.....	37
2.4.	Building the project using the SDK .....	40
2.4.1.	Installing the SDK build environment on Linux.....	40
2.4.2.	Installing the SDK build environment on Microsoft Windows.....	41
2.4.3.	Methods to build a project .....	46
2.5.	Create your own project.....	49
2.5.1.	Using an existing project.....	49
2.5.2.	Removing a module .....	50
2.5.3.	Add the source and header files .....	50
<b>3.</b>	<b>Getting Started Using Keil µVision IDE .....</b>	<b>52</b>
3.1.	Environment .....	52
3.2.	Installing the Microsoft Windows version of Keil .....	52
3.2.1.	Installing the µVision IDE .....	52
3.2.2.	Installing the Keil package for the SDK .....	52
3.3.	Build the project .....	53
3.4.	Download and run the project .....	55
3.4.1.	Downloading the project binary using the Keil µVision IDE .....	55
3.4.2.	Downloading the project binary using Flash Tool or using HDK as a removable storage device.....	59
3.4.3.	Running the project .....	60

3.5.	Debug configuration .....	61
<b>4.</b>	<b>Getting Started Using IAR.....</b>	<b>65</b>
4.1.	Environment .....	65
4.2.	Supported features on LinkIt HDK .....	65
4.3.	Installing the Microsoft Windows version of IAR .....	65
4.4.	Build the project .....	65
4.5.	Download and run the project .....	67
4.5.1.	Download the project.....	67
4.5.2.	Running the project .....	75
4.6.	Debug configuration .....	76
<b>5.</b>	<b>Appendix A: Acronyms and Abbreviations .....</b>	<b>78</b>

## Lists of tables and figures

---

Table 1. HAL features on different chipsets.....	3
Table 2. Middleware features on different chipsets.....	4
Table 3. Wi-Fi station features .....	5
Table 4. Wi-Fi AP features.....	5
Table 5. Supported network protocols .....	6
Table 6. Bluetooth/Bluetooth Low Energy features .....	7
Table 7. Sensor subsystem features.....	7
Table 8. GNSS features.....	8
Table 9. FOTA features.....	8
Table 10. Supported peripheral drivers .....	8
Table 11. Battery management features .....	10
Table 12. Advanced features and components .....	10
Table 13. Recommended build environment.....	40
Table 14. Acronyms and Abbreviations .....	78
Figure 1. Architecture layout of the platform.....	1
Figure 2. Folder structure.....	11
Figure 3. Project folder structure.....	13
Figure 4. Top view of the LinkIt 7687 HDK.....	15
Figure 5. COM port associated with the LinkIt 7687 HDK.	17
Figure 6. Executable file in the MT76x7 Flash Tool's destination folder .....	18
Figure 7. Setup the COM port and baud rate.....	19
Figure 8. Download an image to the device storage .....	19
Figure 9. Downloading the image is successfully complete.....	20
Figure 10. New removable storage detected.....	21
Figure 11. Serial port setting configuration .....	22
Figure 12. Connect to mbed Serial Port .....	23
Figure 13. USB connectors on the LinkIt 2523 development board .....	26
Figure 14. Unknown device on Windows 8 or later.....	27
Figure 15. Browse my computer for driver software.....	28
Figure 16. MTK USB Port on Windows 8 or later .....	29
Figure 17. Debug and modem ports for MTK USB port .....	30
Figure 18. MTK USB driver version in MTK USB Debug Port Properties .....	31
Figure 19. mbed Serial Port.....	33
Figure 20. Download the firmware to a target device using USB connection .....	34
Figure 21. LinkIt 2523 HDK connected as removable disk storage .....	35
Figure 22. Serial port setup.....	36
Figure 23. Connect to mbed Serial Port .....	37
Figure 24. MinGW Installation Manager Setup Tool.....	41
Figure 25. Keep default installation preferences .....	42
Figure 26. Download and set up MinGW Installation Manager.....	43

Figure 27. Basic setup on MinGW Installation Manager.....	43
Figure 28. A basic MinGW installation .....	44
Figure 29. Schedule of pending actions .....	44
Figure 30. Applying scheduled changes .....	44
Figure 31. MinGW folder structure.....	45
Figure 32. tools\gcc folder structure.....	46
Figure 33. Modify the Makefile under the GCC folder of my_project.....	49
Figure 34. Project source and header files under the project folder .....	51
Figure 35. Installing LinkIt SDK with Keil IDE .....	53
Figure 36. Importing the preconfigured project .....	53
Figure 37. Project file for Keil.....	54
Figure 38. Building the project.....	54
Figure 39. Project build result.....	55
Figure 40. Set download configuration on µVision IDE.....	56
Figure 41. Select configuration file .....	56
Figure 42. Select flash initialization file (flash.ini).....	57
Figure 43. Select the CMSIS-DAP Debugger interface.....	57
Figure 44. Select device flash programming algorithm.....	58
Figure 45. Add device flash programming algorithm.....	58
Figure 46. Setup the parameters for downloading the project on LinkIt 2523 HDK.....	59
Figure 47. Download the project binary .....	59
Figure 48. User defined configurations.....	60
Figure 49. Configure the debug settings .....	61
Figure 50. Setting the debug parameters on LinkIt 7687 HDK.....	62
Figure 51. Setting the debug parameters on LinkIt 2523 HDK.....	63
Figure 52. Debugging a project on Keil IDE .....	64
Figure 53. Importing the preconfigured project .....	66
Figure 54. Adding an existing project.....	66
Figure 55. Rebuild the project.....	67
Figure 56. Project build result on IAR Embedded Workbench IDE .....	67
Figure 57. Set download configuration on IAR IDE .....	68
Figure 58. Select debug driver and ddf file .....	69
Figure 59. Open the MT2523.ddf file.....	70
Figure 60. Configure the download settings .....	71
Figure 61. Select the board file .....	72
Figure 62. Set extra download Image .....	73
Figure 63. JTAG/SWD settings.....	74
Figure 64. Download the project binary .....	75
Figure 65. Debugging the project without downloading .....	76
Figure 66. Debugging a project on IAR.....	77

## 1. Overview

MediaTek LinkIt™ software development kit (SDK) v4 provides the software and tools for your application development on LinkIt 7687/7697/2523 HDKs. The SDK includes drivers for hardware abstraction layer, peripherals, connectivity, such as Wi-Fi, Bluetooth/Bluetooth Low Energy, GNSS, sensor subsystem, lightweight IP (lwIP) and other third party features. It also provides battery management, Firmware update Over-The-Air (FOTA) and FreeRTOS.

This get started guide provides quick steps on how to use the SDK and its supported features on three different environments; default GCC, Keil µvision IDE and IAR embedded workbench IDE.

### 1.1. Architecture of the platform

The three-layer architecture of the platform including **BSP**, **Middleware** and **Application** with underlying components is shown in Figure 1.

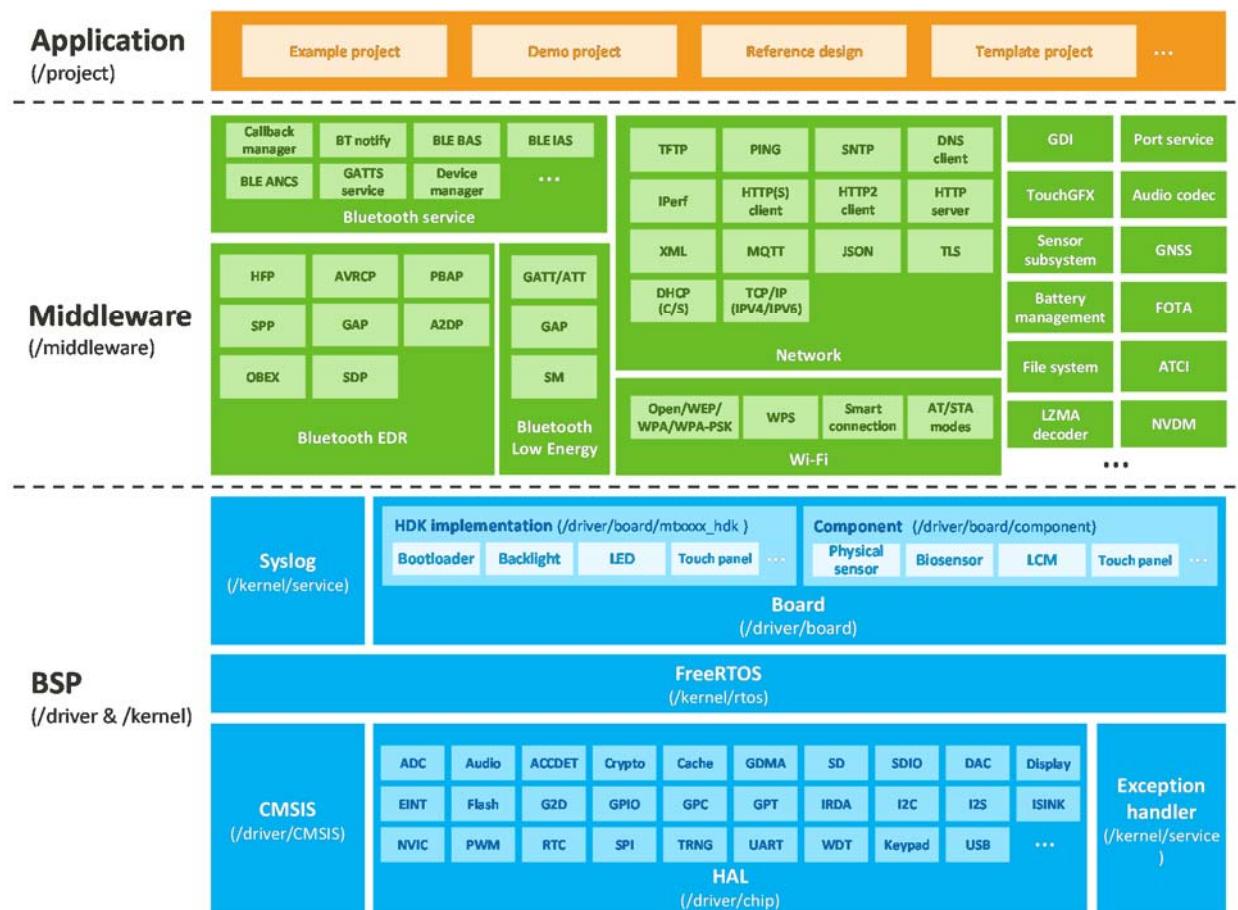


Figure 1. Architecture layout of the platform

A brief description of the layers is provided below:

- **BSP**
  - Hardware drivers. Provide peripheral drivers for the platform, such as ADC, I2S, I2C, SPI, RTC, GPIO, UART, Flash, Security Engine, TRNG, GDMA, PWM, WDT and IRDA TX/RX.

- Hardware Abstraction Layer (HAL). Provides the driver Application Programming Interface (API) encapsulating the low-level functions of peripheral drivers for the operating system (OS), **Middleware** features and **Application**.
  - The hardware components located at <sdk\_root>\driver\board\component are used by the HDK (<sdk\_root>\driver\board\mtxxxx\_hdk). For example, the LCM drivers SH1107 and ST7789H2 located under <sdk\_root>\driver\board\component\lcm folder will be available when you select the ST7789H2 LCM on Linkit 2523 HDK but the GPIO pins need to be configured at <sdk\_root>\driver\board\mt2523\_hdk\lcm and also the source files should be included under the component folder.
  - [FreeRTOS](#). An OS with the open source software for **Middleware** components and **Application**.
  - Syslog. This module implements system logging for development and debugging.
- **Middleware**
    - Wi-Fi. Provides OS dependent function calls, including Wi-Fi APIs that control the bridge supplicant and network processor messages.
    - Network. Provides OS dependent features, such as IPv4, Hyper-Text Transfer Protocol (HTTP) client and the Simple Network Time Protocol (SNTP).
    - Bluetooth/Bluetooth Low Energy. Provides stack and protocol-layer access profiles for data transferring and management control, such as Generic Access Profile (GAP), Serial Port Profile (SPP), Generic Attribute Profile (GATT) and Security Manager (SM).
    - Sensor subsystem. Software framework to interact with sensor drivers and fusion algorithms, including buffer and flow control.
    - FOTA. Provides a mechanism to update the firmware.
    - GNSS. Provides APIs to control the onboard GNSS system.
    - Battery management. Provides the charging flow control and precise information on battery.
    - File system. Provides APIs to control data storage and retrieval in a file system.
    - Other features. Non-Volatile Data Management (NVDM), Extensible Markup Language (XML), JavaScript Object Notation (JSON) and other features that are dependent on **HAL** and **FreeRTOS**. The LinkIt SDK also supports AT command interface (ATCI) as an advanced feature.
  - **Application**
    - Pre-configured projects using **Middleware** components, such as Wi-Fi station and smart connection.

The application layer enables running the projects that are based on **Middleware**, **FreeRTOS** and **HAL** layers.

These layers provide rich features for application development, such as **Middleware** provides the network features, Wi-Fi features, and the OS provides the underlying real-time operating system.

The supported HAL features on different chipsets are listed in Table 1.

To use the HAL features, enable the compile options of the corresponding modules.

- 1) Open the header file hal\_feature\_config.h, located under inc folder of each example project.
- 2) Edit and define the compile options as needed.
- 3) Include the corresponding module header files, located at <sdk\_root>\driver\chip\inc, in the project source files.

**Table 1. HAL features on different chipsets**

Feature	MT7687 F	MT7697/ MT7697D	MT2523D/ MT2523G	MT2533D	Compile option
ADC	✓	✓	✓	✓	HAL_ADC_MODULE_ENABLED
ACCDET			✓	✓	HAL_ACCDET_MODULE_EANBLED
AUDIO			✓	✓	HAL_AUDIO_MODULE_ENABLED
Cache	✓	✓	✓	✓	HAL_CACHE_MODULE_ENABLED
Crypto	✓	✓	✓	✓	HAL_AES_MODULE_ENABLED HAL_DES_MODULE_ENABLED HAL_MD5_MODULE_ENABLED HAL_SHA_MODULE_ENABLED
Clock			✓	✓	HAL_CLOCK_MODULE_ENABLED
DAC			✓	✓	HAL_DAC_MODULE_ENABLED
DVFS			✓	✓	HAL_DVFS_MODULE_ENABLED
EINT	✓	✓	✓	✓	HAL_EINT_MODULE_ENABLED
Flash	✓	✓	✓	✓	HAL_FLASH_MODULE_ENABLED
GDMA	✓	✓	✓	✓	HAL_GDMA_MODULE_ENABLED
GPC	✓	✓	✓	✓	HAL_GPC_MODULE_ENABLED
GPIO	✓	✓	✓	✓	HAL_GPIO_MODULE_ENABLED
GPT	✓	✓	✓	✓	HAL_GPT_MODULE_ENABLED
I2C Master	✓	✓	✓	✓	HAL_I2C_MASTER_MODULE_ENABLED
I2S	✓	✓	✓	✓	HAL_I2S_MODULE_ENABLED
ISINK			✓	✓	HAL_ISINK_MODULE_ENABLED
IRDA	✓	✓			HAL_IRRX_MODULE_ENABLED HAL_IRTX_MODULE_ENABLED
Keypad	✓	✓		✓	HAL_KEYPAD_MODULE_ENABLED
DISPLAY_COLO R			✓	✓	HAL_DISPLAY_COLOR_MODULE_ENABLE D
DISPLAY_DSI			✓	✓	HAL_DISPLAY_DSI_MODULE_ENABLED
DISPLAY_LCD			✓	✓	HAL_DISPLAY_LCD_MODULE_ENABLED
DISPLAY_PWM			✓	✓	HAL_DISPLAY_PWM_MODULE_ENABLED
MPU			✓	✓	HAL_MPU_MODULE_ENABLED
NVIC	✓	✓	✓	✓	HAL_NVIC_MODULE_ENABLED
PWM	✓	✓	✓	✓	HAL_PWM_MODULE_ENABLED
RTC	✓	✓	✓	✓	HAL_RTC_MODULE_ENABLED
SPI Master	✓	✓	✓	✓	HAL_SPI_MASTER_MODULE_ENABLED
SPI Slave			✓	✓	HAL_SPI_SLAVE_MODULE_ENABLED
SD			✓	✓	HAL_SD_MODULE_ENABLED
SDIO			✓	✓	HAL_SDIO_MODULE_ENABLED

Feature	MT7687F	MT7697/ MT7697D	MT2523D/ MT2523G	MT2533D	Compile option
Sleep Manager			✓	✓	HAL_SLEEP_MANAGER_MODULE_ENABLED
TRNG	✓	✓	✓	✓	HAL_TRNG_MODULE_ENABLED
UART	✓	✓	✓	✓	HAL_UART_MODULE_ENABLED
USB			✓	✓	HAL_USB_MODULE_ENABLED
WDT	✓	✓	✓	✓	HAL_WDT_MODULE_ENABLED

The supported middleware features on different chipsets are listed in Table 2. There is a `readme.txt` under the root directory of each middleware module. It contains the information about the module dependency, feature options, notes and brief introduction. To learn more about the usage of the middleware modules, refer to the `readme.txt` file under each module path.

**Table 2. Middleware features on different chipsets**

Feature	MT7687F	MT7697/ MT7697D	MT2523D/ MT2523G	MT2533D	Module path
Bluetooth stack			✓	✓	middleware\MTK\bluetooth
Bluetooth profile			✓	✓	middleware\MTK\bluetooth
Bluetooth Low Energy stack		✓	✓	✓	middleware\MTK\bluetooth
Bluetooth Low Energy profile		✓	✓	✓	middleware\MTK\bluetooth
Wi-Fi	✓	✓			middleware\MTK\minisupp driver\board\mt76x7_hdk\wifi
lwIP	✓	✓			middleware\third_party\lwip
HTTP server	✓	✓			middleware\third_party\httpd
HTTP(S) client	✓	✓			middleware\third_party\httpclient
HTTP2 client	✓	✓			middleware\third_party\nghttp2
IPerf	✓	✓			middleware\third_party\iperf3
MQTT	✓	✓			middleware\third_party\mqtt
JSON	✓	✓			middleware\third_party\ cJSON
Xml	✓	✓			middleware\third_party\xml
TLS	✓	✓			middleware\third_party\mbedtls
DHCP client\server	✓	✓			middleware\third_party\dhcpd
DNS client	✓	✓			middleware\third_party\lwip
SNTP	✓	✓			middleware\third_party\sntp
PING	✓	✓			middleware\third_party\ping

Feature	MT7687F	MT7697/ MT7697D	MT2523D/ MT2523G	MT2533D	Module path
TFTP	✓	✓			middleware\MTK\tftp
GNSS			✓		middleware\MTK\gnss
NVDM	✓	✓	✓	✓	middleware\MTK\nvdm
ATCI			✓	✓	middleware\MTK\atci
File system	✓	✓	✓	✓	middleware\third_party\fatfs
Battery management			✓	✓	middleware\MTK\battery_management
FOTA	✓	✓	✓	✓	middleware\MTK\fota
Sensor subsystem			✓		middleware\MTK\sensor_subsys

 Note, the file system does not work without SD/eMMC.

## 1.2. Supported key components

The platform offers rich connectivity options, such as Wi-Fi, network, Bluetooth, GNSS, peripheral drivers and other advanced components. This section introduces each of these components.

### 1.2.1. Wi-Fi

Wi-Fi is a key feature included in the platform. It supports both station and access point (AP) modes. More information on the Wi-Fi APIs can be found in 7687/7697 SDK API reference manual and Wi-Fi developer's guide under <sdk\_root>\doc. More details about the module can be found in <sdk\_root>\middleware\MTK\minisupp\readme.txt.

The detailed feature list of the station mode can be found in Table 3, where the items are released as a library.

**Table 3. Wi-Fi station features**

Item	Features
Standard	802.11 b/g/n Station (STA)
Channel	Channel 1 to 13
Personal Security	Open, WEP-Open, WPA, WPA2
Enterprise Security	N/A
WPS	Enrollee (PBC/PIN)
Advanced	AMPDU, RX-Filter, DTIM

The detailed feature list of the AP mode can be found in Table 4, where the items are released as a library.

**Table 4. Wi-Fi AP features**

Item	Features
Standard	802.11 b/g/n Soft AP
Channel	Channels 1 to 13
Personal Security	Open, WEP-Open, WPA, WPA2
Support Clients	9 STAs (AP only mode)

Item	Features
WPS	Registrar (PBC/PIN) , Enrollee (PIN)
Enterprise Security	N/A

### 1.2.2. Network

The internet middleware APIs can be found in the Internet Middleware API Reference Manual and LinkIt for RTOS Open Source Components Guide under `<sdk_root>\doc`. Supported network features of the platform are listed in Table 5. Learn how to include each supported protocol module from `<sdk_root>\middleware\third_party\xxx\readme.txt`.

**Table 5. Supported network protocols**

Item	Features
IP Stack	<ul style="list-style-type: none"> <li>• IPv4 (LWIP)</li> <li>• TCP, UDP</li> <li>• ICMP</li> <li>• DHCP Client/Server</li> <li>• DNS Client</li> <li>• NETCONN</li> <li>• SOCKET</li> </ul>
SNTP	<ul style="list-style-type: none"> <li>• Simple Network Time Protocol</li> <li>• RFC4330</li> <li>• Support SNTP receive timeout</li> <li>• Support SNTP update delay</li> <li>• Support SNTP max server</li> </ul>
HTTP	<ul style="list-style-type: none"> <li>• HTTP 1.1</li> <li>• Client (POST/GET)</li> </ul>
HTTPS	<ul style="list-style-type: none"> <li>• HTTP 1.1</li> <li>• Client (POST/GET)</li> </ul>
SSL/TLS	<ul style="list-style-type: none"> <li>• mbed TLS</li> <li>• Client, Server (not tested)</li> <li>• SSL3.0, TLS1.0, 1.1, 1.2</li> <li>• AES, 3DES, DES, ARC4</li> <li>• MD5, SHA-1, SHA-256</li> <li>• RSA/PKCS#1 v1.5</li> </ul>

### 1.2.3. Bluetooth/Bluetooth Low Energy

Bluetooth with Enhanced Data Rate (EDR) and Bluetooth Low Energy (LE) are key features in the LinkIt SDK for RTOS. The details are listed in Table 6. The SDK API and module introduction can be found in the API reference guide and Bluetooth developer's guides for LinkIt 2523 HDK and LinkIt 7697 HDK at `<sdk_root>\doc`. In addition, find more details on how to include the Bluetooth module in `<sdk_root>\middleware\MTK\bluetooth\readme.txt`.

**Table 6. Bluetooth/Bluetooth Low Energy features**

Item	Features
EDR-A2DP	Advanced Audio Distribution Profile
EDR-AVRCP	Audio/Video Remote Control Profile (CT:v1.3/TG:v1.0)
EDR-HFP/HSP	Hands-Free Profile v1.7 or Headset Profile
EDR-PBAP	<ul style="list-style-type: none"> <li>• The Phone Book Access Profile (PBAP)</li> <li>• Defines the procedures and protocols to exchange Phonebook objects between devices.</li> </ul>
EDR-SPP	Serial Port Profile
EDR-GAP	Generic Access Profile
BLE-GAP	Generic Access Profile
BLE-GATT/ATT	Generic Attribute Profile
BLE-SMP	Low Energy Security Manager Protocol
Multipoint Support	<ul style="list-style-type: none"> <li>• Supports multipoint Bluetooth access in EDR.           <ul style="list-style-type: none"> <li>◦ Two HFP(HF)</li> <li>◦ Two A2DP(Sink)</li> <li>◦ Two AVRCP(CT)</li> <li>◦ Two SPP server/client</li> </ul> </li> <li>• Supports multipoint Bluetooth access in Bluetooth Low Energy.           <ul style="list-style-type: none"> <li>◦ Four Bluetooth Low Energy links.</li> </ul> </li> </ul>

#### 1.2.4. Sensor subsystem

Supported sensor subsystem features of the LinkIt SDK are listed in Table 7. More information on the sensor subsystem SDK APIs can be found in sensor subsystem section of the 2523 API Reference Manual under <sdk\_root>\doc. In addition, find more details on how to include the sensor subsystem module in <sdk\_root>\middleware\MTK\sensor\_subsys\readme.txt.

**Table 7. Sensor subsystem features**

Item	Features
Physical sensor	<ul style="list-style-type: none"> <li>• Accelerometer</li> <li>• Biosensors (PPG, EKG)</li> </ul>
Sensor fusion	<ul style="list-style-type: none"> <li>• Heart rate</li> <li>• Blood pressure</li> </ul>

#### 1.2.5. GNSS

The detailed list of GNSS features is provided in Table 8. The API and module introduction can be found in API reference Manual and LinkIt for RTOS GNSS Developer's Guide under <sdk\_root>\doc. In addition, find more details on how to use this module in <sdk\_root>\middleware\MTK\gnss\readme.txt.

**Table 8. GNSS features**

Item	Features
GNSS	<ul style="list-style-type: none"> <li>● GPS / BeiDou / GLONASS</li> <li>● Low Power Mode</li> <li>● Periodic mode</li> <li>● GLP mode</li> <li>● Time Aiding / Location Aiding</li> </ul>
Extended Prediction Orbit (EPO)	<ul style="list-style-type: none"> <li>● EPO host aiding</li> <li>● EPO download using Bluetooth</li> </ul>

### 1.2.6. FOTA

The detailed list of FOTA features is provided in Table 9. The API and module introduction can be found in LinkIt SDK API Reference Manual and in LinkIt for RTOS Firmware Update Developer's Guide under <sdk\_root>\doc. In addition, find more information on how to include this module in <sdk\_root>\middleware\MTK\fota\readme.txt.

**Table 9. FOTA features**

Item	Features
FOTA	<ul style="list-style-type: none"> <li>● Full binary update mechanism</li> <li>● Package data compression</li> <li>● Integrity check</li> <li>● Power loss protection</li> <li>● FOTA packaging tool</li> </ul>

### 1.2.7. Peripheral drivers

The detailed list of peripheral drivers is provided in Table 10. The APIs for the drivers can be found in the LinkIt SDK API Reference Manual under <sdk\_root>\doc. To include HAL module, include <sdk\_root>\driver\chip\mt2523\module.mk in project makefile for LinkIt 2523 HDK, or include <sdk\_root>\driver\chip\mt7687\module.mk in project makefile for LinkIt 7687 HDK.

**Table 10. Supported peripheral drivers**

Item	Features
ACCDET	<ul style="list-style-type: none"> <li>● Accessory Detector.</li> <li>● Detects plug-in/out of earphone based on the suggested circuit.</li> </ul>
ADC(MT2523x)	<ul style="list-style-type: none"> <li>● ADC module.</li> <li>● DAC module.</li> </ul>
CACHE	<ul style="list-style-type: none"> <li>● The maximum size of the cache is 32kB.</li> </ul>
EINT	<ul style="list-style-type: none"> <li>● External interrupt controller.</li> <li>● Processes the interrupt request from an external source or a peripheral device.</li> </ul>
Flash	<ul style="list-style-type: none"> <li>● Supports execute in place (XIP) and programming flash by software.</li> </ul>

Item	Features
	<ul style="list-style-type: none"> <li>• Default 2MB system in package (SiP) flash on LinkIt 7687 HDK</li> <li>• Default 4MB system in package (SiP) flash on LinkIt 2523 HDK.</li> <li>• Supports external flash up to 16MB on LinkIt</li> </ul>
GPIO	<ul style="list-style-type: none"> <li>• GPIO mode (in or out)</li> <li>• Set Pull Up/Down for GPIO IN mode</li> </ul>
GPT	<ul style="list-style-type: none"> <li>• General Purpose Timer.</li> <li>• Supports 32kHz and 1MHz clock sources, repeat and one-shot modes for timing events and delays in µs or ms.</li> </ul>
PWM	<ul style="list-style-type: none"> <li>• Range is 256 duty cycles</li> <li>• 32kHz, 2MHz, XTAL clock for PWM frequency reference</li> </ul>
UART	<ul style="list-style-type: none"> <li>• Two full set (TX/RX) UART support on LinkIt 7687 HDK</li> <li>• Four UART ports, two of them featuring hardware flow control on LinkIt 2523 HDK</li> <li>• Baud rate of up to 921600</li> </ul>
I2C Master	<ul style="list-style-type: none"> <li>• Two I2C interfaces</li> <li>• Supports 50/100/200/400kHz transmission rate</li> </ul>
I2S Master	<ul style="list-style-type: none"> <li>• I2S master is capable of servicing an external codec component.</li> <li>• Supports 8/11.025/12/16/22.05/24/32/44.1/48 kHz audio sampling rates in stereo mode.</li> </ul>
ISINK	<ul style="list-style-type: none"> <li>• Current sink</li> <li>• Adjustable backlight current.</li> </ul>
MPU	<ul style="list-style-type: none"> <li>• Memory Protection Unit</li> </ul>
IrDA	<ul style="list-style-type: none"> <li>• TX (NEC, RC5, RC6, pulse width)</li> <li>• RX (RC5, pulse width)</li> </ul>
GPC	<ul style="list-style-type: none"> <li>• General Purpose Counter</li> <li>• Supports 1MHz pulse detection</li> </ul>
WDT	<ul style="list-style-type: none"> <li>• Supports hardware, software watchdog</li> <li>• Supports system reset</li> </ul>
I2S-Slave	<ul style="list-style-type: none"> <li>• Supports sample rate: 8/12/16/24/32/48kbits</li> <li>• Supports mono and stereo mode</li> </ul>
SPI-Master	<ul style="list-style-type: none"> <li>• Serial Peripheral Interface</li> </ul>
RTC	<ul style="list-style-type: none"> <li>• Real-Time Clock</li> </ul>
GDMA	<ul style="list-style-type: none"> <li>• General Purpose DMA</li> </ul>
Security	<ul style="list-style-type: none"> <li>• SHA1, SHA2 (256, 384, 512), MD5, AES, 3DES</li> </ul>

Item	Features
TRNG	<ul style="list-style-type: none"> <li>• Truly Random Number Generator</li> <li>• Generates 32bit random number</li> </ul>
Charger	<ul style="list-style-type: none"> <li>• Supports single-cell Li-Ion battery charging.</li> </ul>
Keypad	<ul style="list-style-type: none"> <li>• Keypad scanner</li> <li>• Supports 3x3 single/double key mode</li> </ul>

### 1.2.8. Battery management

The battery management features are listed in Table 11. The battery management APIs are found in 2523 API Reference Manual under <sdk\_root>\doc. Find more information on how to include this module in <sdk\_root>\middleware\MTK\battery\_management\readme.txt.

*Table 11. Battery management features*

Item	Features
Battery management	<ul style="list-style-type: none"> <li>• Charging flow control mechanism.</li> <li>• Algorithm for battery capacity measurement.</li> <li>• Precise information on the battery, such as temperature and battery level.</li> </ul>

### 1.2.9. Advanced features and components

The advanced features and components included in the platform are listed in Table 12.


*Table 12. Advanced features and components*

Item	Features
XML	<ul style="list-style-type: none"> <li>• Mini-XML</li> <li>• Supports <ul style="list-style-type: none"> <li>◦ Entity</li> <li>◦ GET/SET</li> <li>◦ Index</li> <li>◦ Search</li> </ul> </li> </ul>
JSON	<ul style="list-style-type: none"> <li>• cJSON</li> <li>• JSON string parser</li> </ul>
Smart Connection	<ul style="list-style-type: none"> <li>• MediaTek LinkIt™ Smart Connection</li> </ul>
CLI command	<ul style="list-style-type: none"> <li>• CLI command parser</li> </ul>
ATCI	<ul style="list-style-type: none"> <li>• AT command parser</li> </ul>
File system	<ul style="list-style-type: none"> <li>• Windows compatible</li> <li>• Platform independent</li> <li>• Very small footprint for code and work area</li> <li>• Multiple volumes</li> <li>• Multiple ANSI/OEM code pages including DBCS</li> <li>• Long file name support in ANSI/OEM or Unicode</li> </ul>

Item	Features
	<ul style="list-style-type: none"> <li>• FreeRTOS support for multitasking</li> <li>• Multiple sector size support up to 4kB</li> <li>• Read-only, minimized API, I/O buffer and more</li> </ul>

### 1.3. Folder structure

The SDK is delivered as a single package organized in a folder structure, as shown in Figure 2.

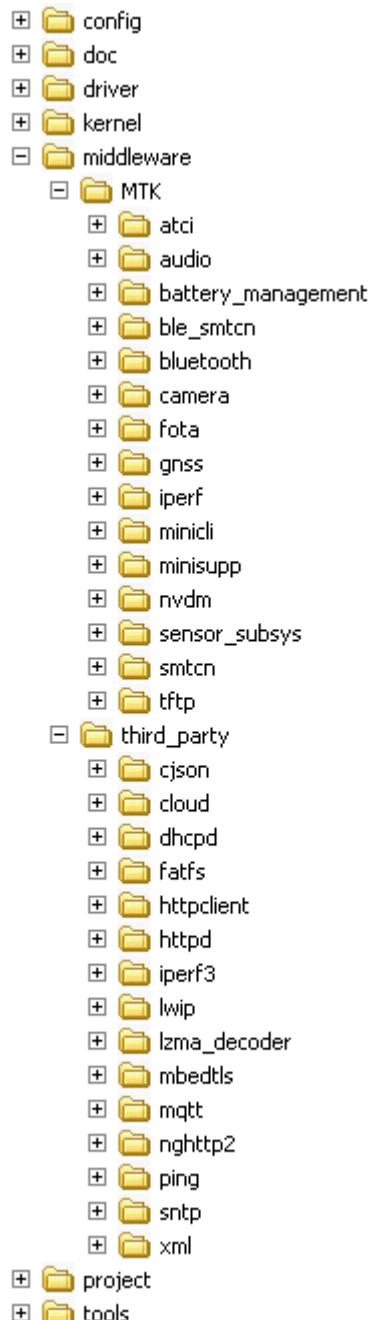

**Figure 2. Folder structure**

This package contains the source and library files of the major components, build configuration, related tools and documentation. A brief description on the layout of these files is provided below:

- **config.** Includes make and compile configuration files for compiling a binary project.
- **doc.** Includes SDK related documentation, such as developer and SDK API reference guides.
- **driver.** Includes common driver files, such as board drivers, peripheral and CMSIS-CORE interface drivers.
- **kernel.** Includes the underlying RTOS and system services for exception handling and error logging.
- **middleware.** Includes software features for HAL and OS, such as network and advanced features.
- **project.** Includes pre-configured example and demo projects using Wi-Fi, HTTP, HAL, etc.
- **tools.** Includes tools to compile, download and debug projects using the SDK.

The main components that belong to middleware are in the **middleware** folder:

- **MTK**
  - **minicli.** A Command Line Interface (CLI) that provides a framework for the upper layer to register a function executed by an input command. The input command and output message streaming is communicated through the UART.
  - **minisupp.** A supplicant is an entity at one end of a point-to-point LAN segment that seeks to be authenticated by an authenticator attached to the other end of that link. Mini-suppliant library supports this with minimum memory usage.
  - **nvdm.** NVDM is a type of memory mechanism that retains its contents when the system power is turned off.
  - **atci.** Provides the interface for a target communication using AT commands though UART.
  - **battery\_management.** Includes battery monitor, charging flow control and battery capacity algorithms.
  - **bluetooth.** Bluetooth/Bluetooth Low Energy provides three profiles (GAP, GATT, SM) to discover and connect Bluetooth devices and to transfer and control data securely through a Bluetooth connection.
  - **fota.** FOTA provides firmware update functionality.
  - **gnss.** Provides APIs to receive GNSS data and control the on-board GNSS module.
  - **sensor\_subsys.** Provides sensor drivers and fusion algorithms.
- **third\_party**
  - **cjson.** JSON is an open standard format that uses human-readable text to transmit data objects consisting of attribute–value pairs. cJSON is a single file implementation in C.
  - **dhcpd.** DHCP daemon (DHCPD) is a program that operates as a daemon on a server to provide Dynamic Host Configuration Protocol (DHCP) service to a network. Devices in a network with a DHCP server can retrieve network parameter configuration from the server.
  - **httpclient.** The HTTP client is the client implementation for requesting data from HTTP servers.
  - **lwip.** A widely used open source TCP/IP stack designed for embedded systems. The focus of the lwIP TCP/IP implementation is to reduce resource usage while still having a full-scale TCP.
  - **mbedtls.** Transport Layer Security (TLS) and Secure Sockets Layer (SSL) are cryptographic protocols designed to provide communications security over a computer network. mbedtls is an open source


implementation for developers to include cryptographic and SSL/TLS capabilities in embedded products with a minimal coding footprint.

- **sntp.** SNTP is a networking protocol for clock synchronization between computer systems over packet-switched, variable-latency data networks.
- **xml.** XML is a markup language defined by the W3C's XML 1.0 Specification that defines a set of rules for encoding documents in a human-readable and machine-readable format.
- **fatfs.** [FatFs](#) is generic FAT file system for small embedded systems. It is used to control data storage and retrieval in a file system.

## 1.4. Project source structure

The SDK provides a set of reference applications. For example, projects with a single function showing how to use drivers or other module features and others with complex functionality demonstrating how to use the middleware components.

Example applications are located in the `<sdk_root>\project\<hdk>\apps` and `<sdk_root>\project\<hdk>\hal_examples` folder and they all have the same folder structure, as shown in Figure 3.



*Figure 3. Project folder structure*

- 1) **EWARM.** IAR related project configuration files.
- 2) **GCC.** GCC related project configuration files, such as a makefile.
- 3) **inc.** Project header files.
- 4) **MDK-ARM.** Keil related project configuration files.
- 5) **src.** Project source files.
- 6) **Readme.txt.** A brief introduction about project behavior and the required environment.

You can apply the relevant reference applications to further your development.

## 2. Getting Started Using GCC

---

This section provides a guide to getting started with the LinkIt development platform for RTOS and covers the following items:

- Supported environments for development.
- Configuring the LinkIt HDK.
- Building the project using the SDK.
- Downloading and running the project from Microsoft Windows.
- Debugging the project from Microsoft Windows.
- Creating your own project.

### 2.1. Environment

The SDK can be used on any edition of Microsoft Windows XP, Vista, 7 and 8, and on Linux. A GCC compiler is required to build the project.

- Download and extract the content of the SDK package on your local PC.
- Follow the instructions in the `readme.txt` file to download and extract the SDK toolchain package.
  - Copy the GCC compiler (“gcc” folder) to `<sdk_root>\tools\`. The compiler settings are in the `<sdk_root>\.config` configuration file.

The default GCC toolchain is supported for the following versions of the Linux 32 or 64 bit hosts.

- Ubuntu 8.x or later (tarball).
- Ubuntu LTS 10.04 or later (PPA).
- RHEL 4/5/6 (tarball).

### 2.2. Developing on LinkIt 7687 HDK

#### 2.2.1. Configuring the LinkIt 7687 HDK

LinkIt 7687 HDK includes a main board and a MT7687F stamp module. The MT7687F stamp module is mounted on the main board. The top view of the main board is shown in Figure 4.

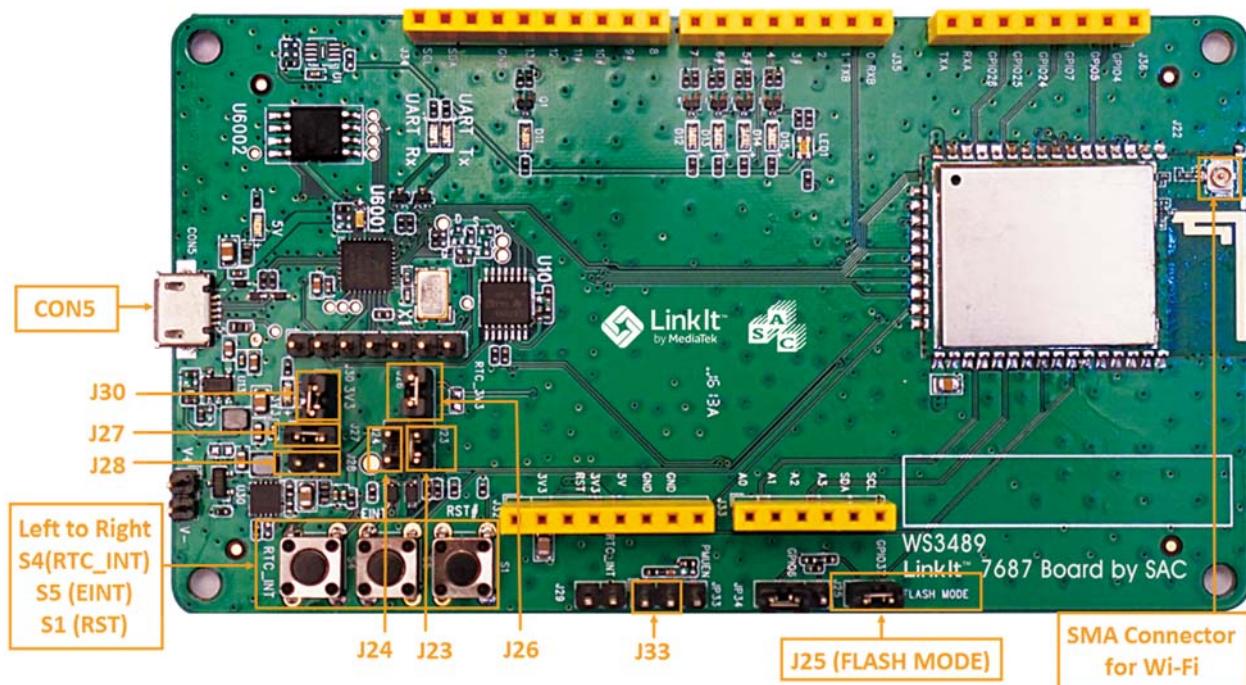


Figure 4. Top view of the LinkIt 7687 HDK

The description of pins and their functionality is provided below.

- **CON5** is a USB connector to debug through UART, transmit and receive a signal and supply power from the PC. The USB connectivity with the PC is supported by the on-board [MK20DX128VFM5](#).
- Set the jumpers **J23**, **J26**, **J27** and **J30** on, if the board is powered up using the USB connector.
- Press **S4** to wake up the system from the RTC mode.
- Press **S1** to reset the system.
- **J25** sets the flash mode.
  - Remove the jumper **J25** to switch to **FLASH Normal** mode. In this mode, if the power is on, the board will load firmware from the flash and reboot.
  - Set the jumper **J25** on to switch to **FLASH Recovery** mode. In this mode, if the power is on, the board will load ROM code and wait for the MT76x7 Flash Tool to initiate firmware download process.
- **Wi-Fi Antenna** is a PCB antenna. MT7687F stamp module is by default connected to the PCB antenna to transmit and receive RF signals.

The default configuration of the LinkIt 7687 HDK support the following functionality:

- Power supply — attach a micro-USB connector to the **CON5**.
- Flash mode — **Recovery** mode.
- Support RTC interrupt.
- Clock source — 32.768kHz source crystal clock for the RTC mode or external clock operating on 32.768kHz.

- XTAL — 40MHz.
- RTC mode — supported.

The hardware settings of the stamp module are shown below:

- XTAL — 40MHz.
- Clock source — 32.768kHz source crystal clock for the RTC mode or external clock operating on 32.768kHz.
- RTC mode — supported.
- Flash mode — **Normal** mode.

### 2.2.2. Installing the LinkIt 7687 HDK drivers on Microsoft Windows

To configure the LinkIt 7687 HDK:

- Connect the HDK to the computer using a micro-USB cable.
- Download and install mbed Windows serial port driver from [here](#). Open Windows **Control Panel** then click **System** and:
  - On Windows 7 and 8, click **Device Manager**.
  - On Windows XP, click the **Hardware** tab and then **Device Manager**.
- In **Device Manager**, navigate to **Ports (COM & LPT)** (see Figure 5).
- A new **COM** device should appear under **Ports (COM & LPT) in Device Manager**, as shown in Figure 5. Note the **COMx** port number of the serial communication port, this information is needed to send command and receive logs from the COM port.

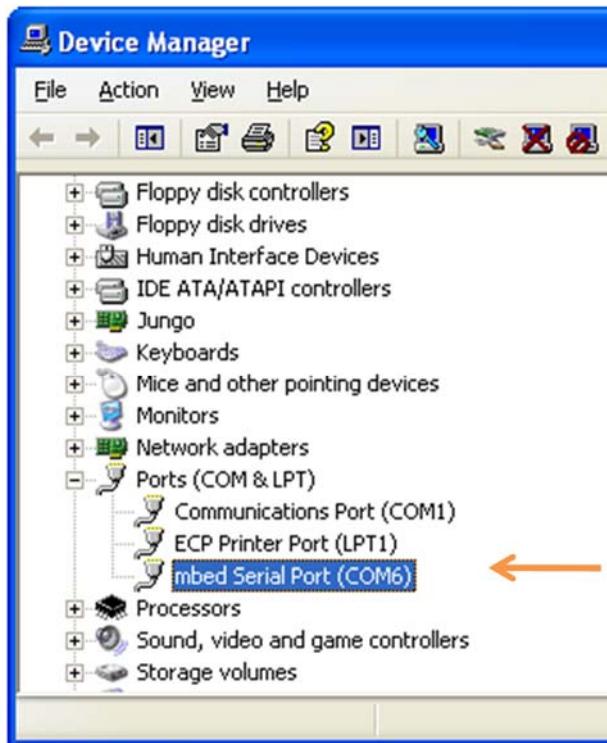


Figure 5. COM port associated with the LinkIt 7687 HDK

### 2.2.3. Installing MT76x7 Flash Tool for LinkIt 7687 HDK

The MT76x7 Flash Tool can be used on Microsoft Windows XP, Vista, 7, 8 and 10 with 32-bit and 64-bit operating systems. It's available for Linux with 32-bit and 64-bit operating system (Ubuntu 14.04 or higher).

To install the tool:

- 1) Download the LinkIt SDK v4 package from [here](#).

On Linux OS environment:

- 1) Extract the content of the SDK and navigate to the MT76x7 Flash Tool's folder (./linux32bit or ./linux64bit). The tool is a setup free package.
- 2) Run the following command to establish the library environment and launch the Flash Tool:

```
source env-setup.sh  
./mt76x7-flash-tool.exe
```

On Microsoft Windows OS environment:

- 1) Extract the content of the SDK and navigate to the MT76x7 Flash Tool's folder (./win). The tool is a setup free package.
- 2) Execute the mt76x7-flash-tool.exe to launch the Flash Tool (see Figure 6).


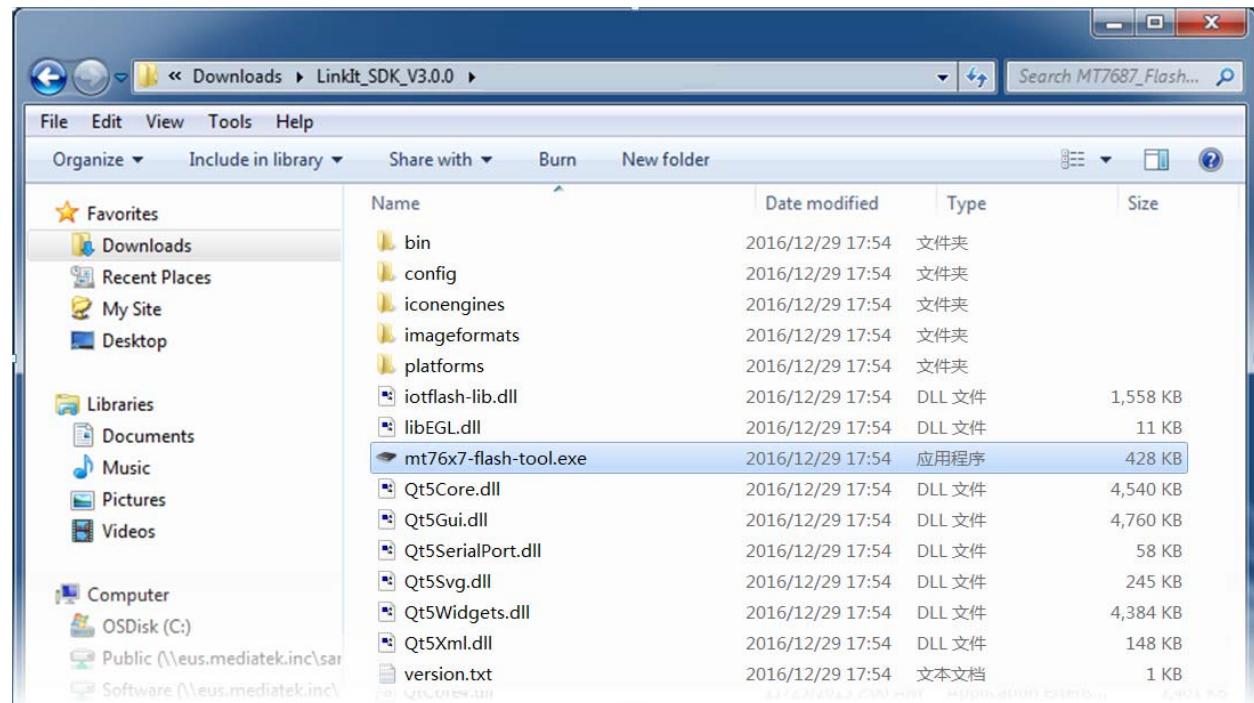


Figure 6. Executable file in the MT76x7 Flash Tool's destination folder

To configure the COM port and the baud rate:

- Launch the MT76x7 Flash Tool and connect the device to a PC with a micro-USB cable.
- Reset the development board or unplug and re-plug in the micro-USB cable.
- Click **Refresh** and configure the correct COM port (see section 2.2.2, “Installing the LinkIt 7687 HDK drivers on Microsoft Windows”) and the baud rate, as shown in Figure 7.

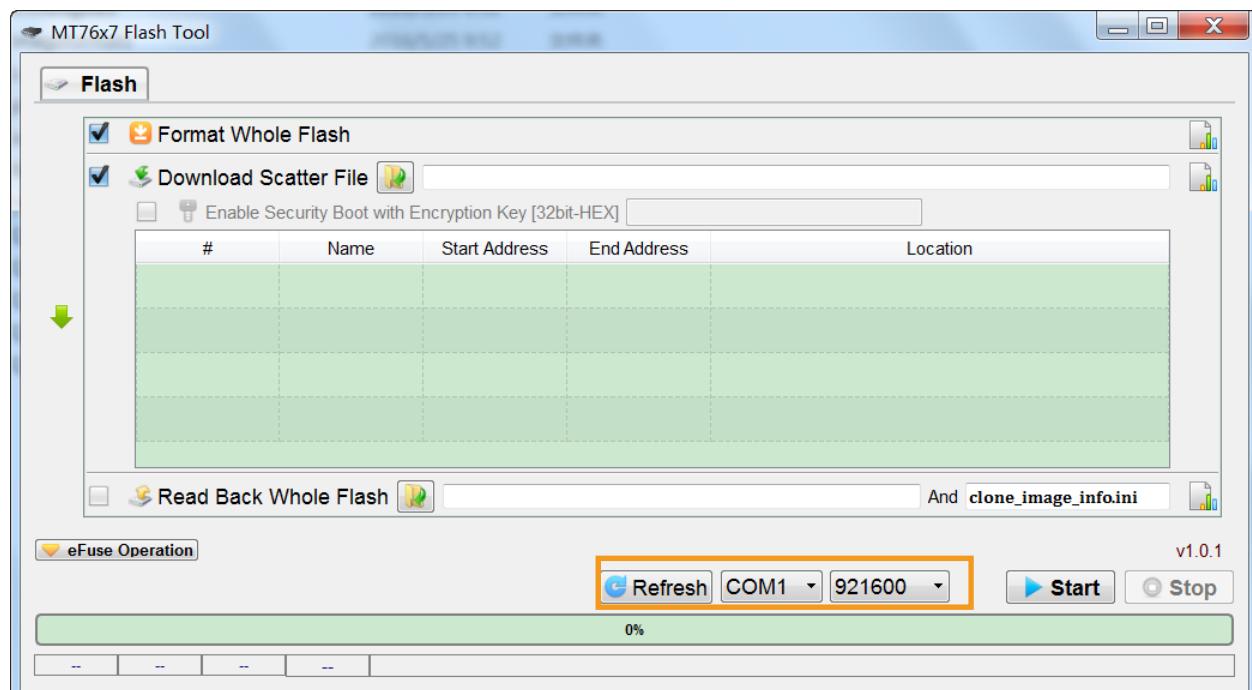

*Figure 7. Setup the COM port and baud rate*

## 2.2.4. Flashing the image to LinkIt 7687 HDK

There are two methods on how to flash the image to the LinkIt 7687 HDK.


### 2.2.4.1. Using the Flash Tool

The **Download** feature flashes the images to the device. The image data can be scrambled if necessary. If scrambled, the data read back cannot be decoded.

Follow these steps to execute commands.

- 1) Enable **Download Scatter File** checkbox.
- 2) Click **open folder** to provide the scatter file. The scatter file, known as **Image Description File**, is located under the project binary folder, where all other binary files reside. It is usually named as `flash_download.ini`. The binary files could be either MediaTek released or generated during build process. The **Image Description File** includes information about the file version, project name and partition layout details. Most projects have three partitions:
  - **Loader** partition that stores bootloader.
  - **TargetFW** partition that stores proprietary firmware for the Wi-Fi subsystem.
  - **HostFW** partition that stores the project application binary, such as `mt7687_iot_sdk_demo.bin`.

The partition layout details including **Name**, **Start Address**, **End Address** and the location of the files are shown in Figure 8.

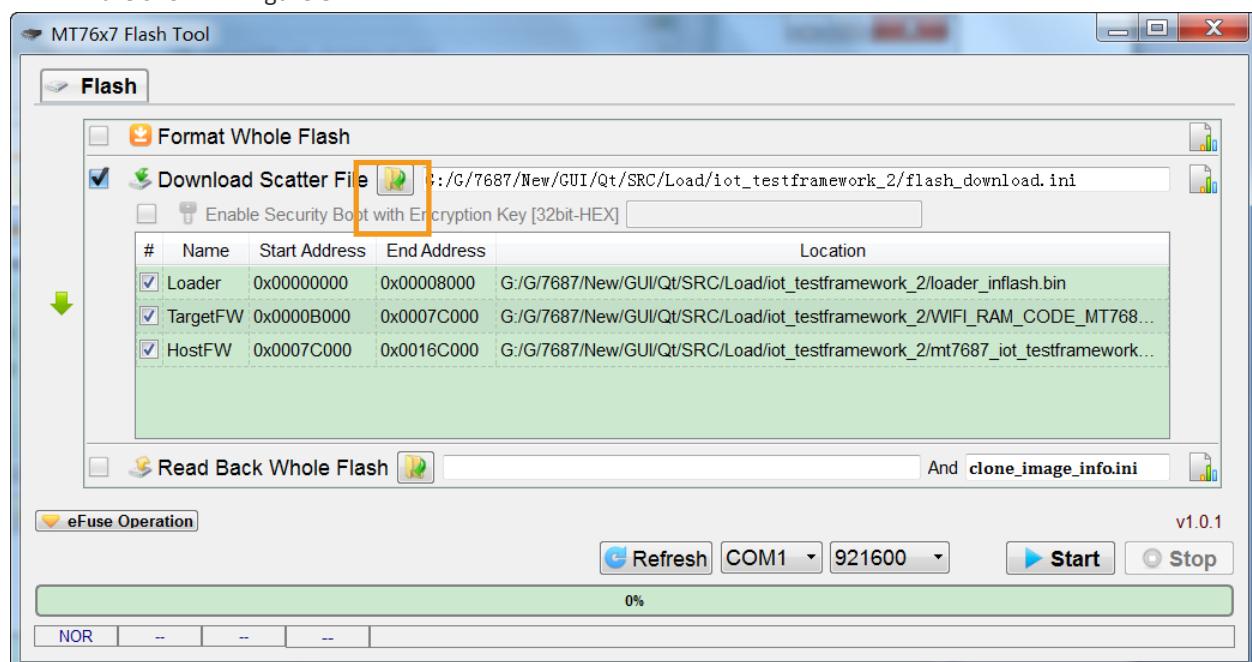*Figure 8. Download an image to the device storage*

- 3) Click **Start** to execute the command. When downloading is complete, the result status is shown as in Figure 9.


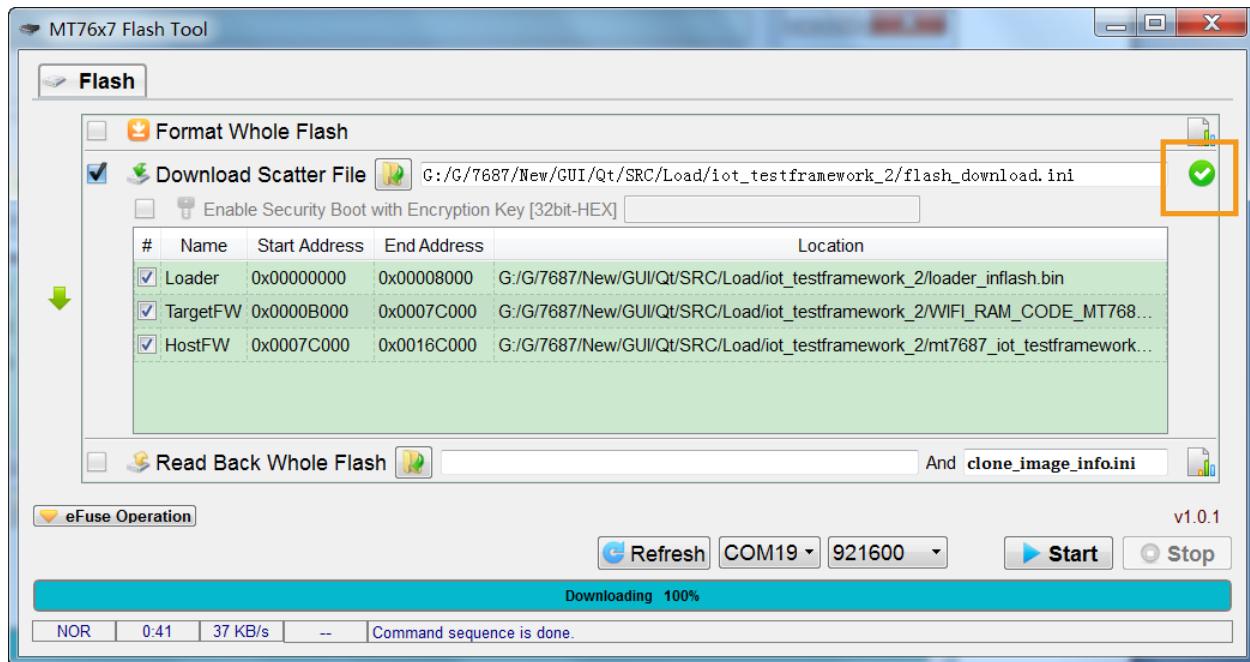


Figure 9. Downloading the image is successfully complete

#### 2.2.4.2. Using the LinkIt 7687 HDK as a removable storage

To update the application binary only (example project binary: `mt7687_iot_sdk_demo.bin`), use the HDK as a mass storage device as follows:

- 1) Set the HDK to **FLASH Recovery** mode (see section 2.2.1, “Configuring the LinkIt 7687 HDK”).
- 2) Power up the board with a micro-USB cable.
- 3) Navigate to **Computer** on your PC to check if a new mass storage named **MT76x7** is available under **Removable Disk**, as shown in Figure 10.
- 4) Open the **MT76x7** removable storage, then drag and drop the binary `mt7687_iot_sdk_demo.bin` to complete downloading the image.
- 5) Disconnect the board, set the jumper to **FLASH Normal** mode, and then reconnect the board to run your application.

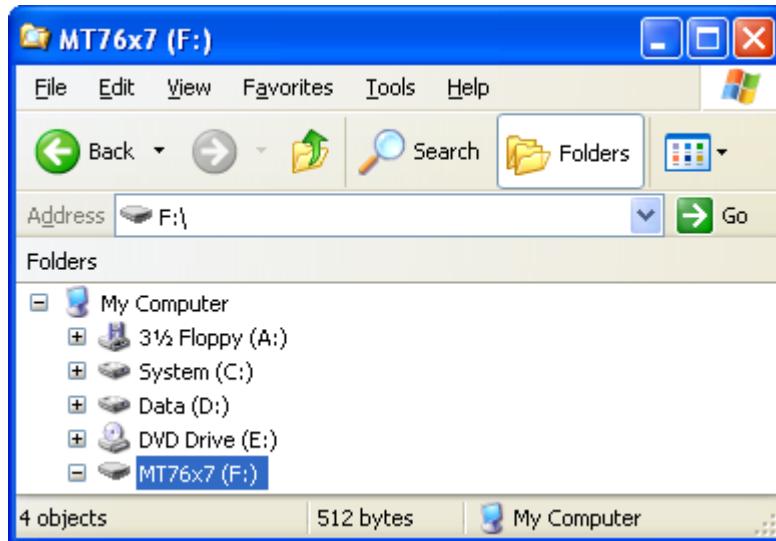

*Figure 10. New removable storage detected*

## 2.2.5. Running the project on LinkIt 7687 HDK

Most of the example projects for the LinkIt 7687 HDK facilitate the on-board mbed serial port to output logs and accept user inputs. Therefore you'll need to setup a terminal application that connects to the serial port, such as [TeraTerm](#) terminal emulator software. You can use any other terminal application of your choice.

### 2.2.5.1. Terminal application setup

If you already have a terminal application installed, skip to the next section to configure the serial port.

To install TeraTerm, follow the steps below:

- 1) Download the latest version of TeraTerm installer from [here](#).
- 2) Launch installer, such as `teraterm-4.91.exe`, and simply follow the steps using default options to complete the installation.

### 2.2.5.2. Serial port settings

All example projects use the same serial port configuration. Apply the following configuration settings in your terminal application:

If you are using TeraTerm:

- 1) Launch **TeraTerm** and then click **Setup** on the top menu of the command window.
- 2) Click to open **Serial Port...** setup.
- 3) Select the COM port number that maps to the mbed serial port shown in Figure 5.
- 4) Set the **Baud rate**, **Data**, **Parity**, **Stop** and **Flow control** parameters (see Figure 11). Leave the **Transmit delay** fields with default values (0), and click **OK**.

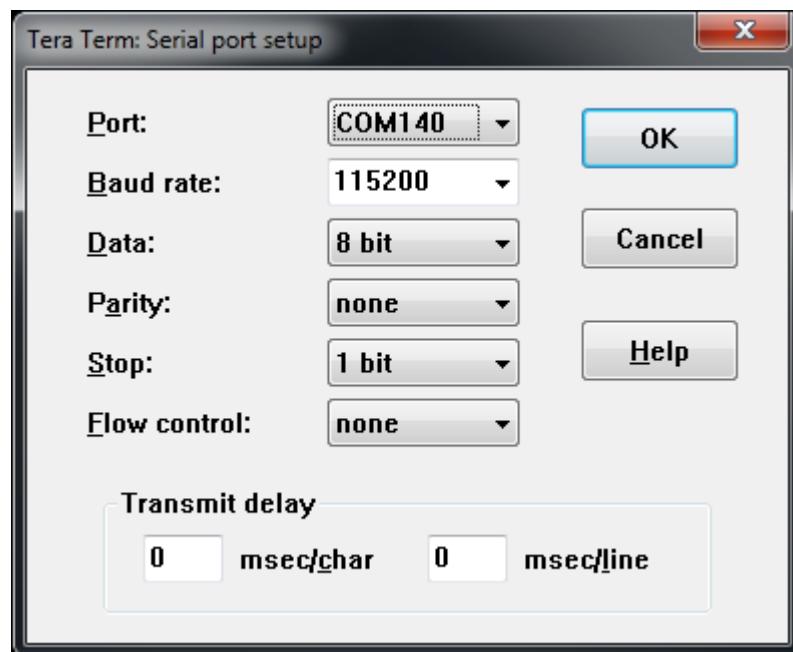


Figure 11. Serial port setting configuration

- 5) To apply this configuration to all future serial port connections, select **Setup** and then **Save Setup...** to save the TERATERM.INI file to the TeraTerm program folder. The default location is C:\Program Files (x86)\teraterm.

#### 2.2.5.3. Run the project

To run the project on LinkIt 7687 HDK:

- 1) Disconnect the micro-USB cable to power off the board.
- 2) Switch the flash mode to **FLASH Normal** mode, see section 2.2.1, “Configuring the LinkIt 7687 HDK”, for more details.
- 3) Reconnect the USB cable to power on the board.
- 4) Open the terminal application and connect to the mbed serial port. If you are using TeraTerm, select **File** and then **New Connection...** from the menu bar, and then select **Serial**. Provide the **Port** corresponding to **mbed Serial Port**, as shown in Figure 12, and click **OK**.

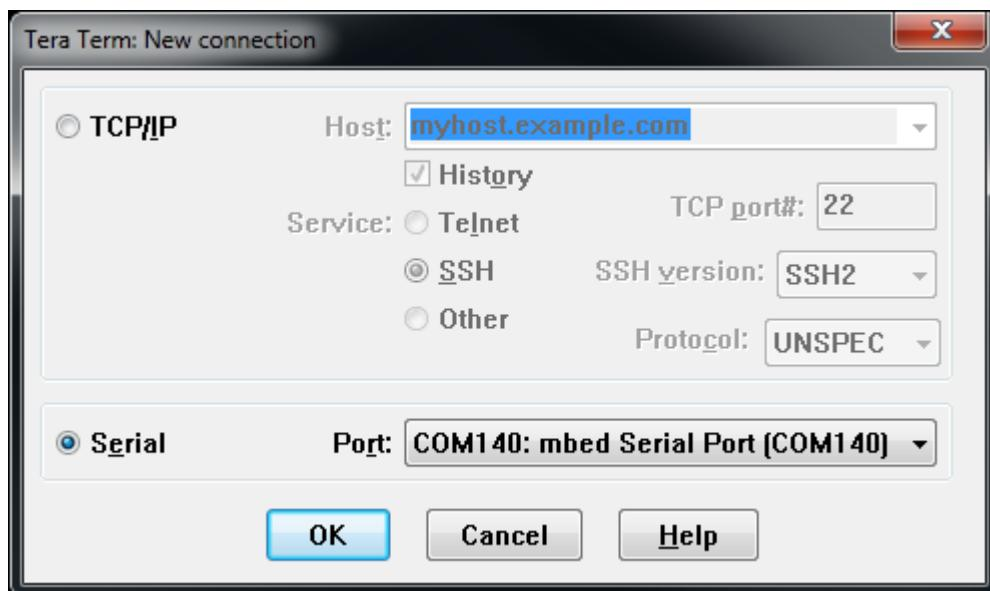


Figure 12. Connect to mbed Serial Port

- 5) Press the reset button **S1 (RST)** on the board.
- 6) Observe the output log written in project source files from UART port. A reference log example is shown below.

```
loader init [2016-04-28 15:03:10.924]
[2016-04-28 15:03:10.924]
fota: TMP is empty, skip upgrade[2016-04-28 15:03:10.939]
[2016-04-28 15:03:10.939]
jump to (0x1007c000) [2016-04-28 15:03:10.939]
total avail space = 13748
[2016-04-28 15:03:10.955]
nvdm init finished
[2016-04-28 15:03:10.955]
[T: 52 M: common C: INFO F: system_init L: 269]: FreeRTOS Running[2016-
04-28 15:03:10.970]
```

## 2.2.6. Debugging with the LinkIt 7687 HDK from Microsoft Windows

This section describes how to debug a project built with the GCC compiler using openOCD debugger tool.

Before commencing project debugging, install supporting software on Windows OS.

- 1) Download openocd-0.9.0 from [here](#) and unzip it into <openocd\_root> folder.
  - o Download GCC toolchain from [here](#) for your Windows version, and unzip it into <gcc\_root> folder.
- 2) Install the mbed serial port [driver](#), if the mbed serial port driver is not installed (see MT76x7 Flash Tool User's Guide).

You can debug a project once it's already downloaded on your HDK. More details can be found in MediaTek LinkIt™ SDK v4 GCC Build Environment Guide.

- 7) Create a board configuration file named mt7687.cfg and copy the following content to the file:

```
puts "Load MT7687(CMSIS-DAP) configuration"
# Use CMSIS-DAP debug interface
source [find interface/cmsis-dap.cfg]
```

```

source [find target/swj-dp.tcl]
# Setup variables
set _CHIPNAME MT7687
set _TARGETNAME $_CHIPNAME.cm4
set _CPUTAPID 0x2ba01477

# Create DAP instance
swj_newdap $_CHIPNAME cpu -irlen 4 -expected-id $_CPUTAPID
# Create target instance
target create $_TARGETNAME cortex_m -endian little -chain-position
$_CHIPNAME.cpu
# Setup SWD frequency
adapter_khz 3000
# Hook for GDB attach, to bring target into debug mode
$_TARGETNAME configure -event gdb-attach {
    targets $_TARGETNAME
    halt
}
# Hook for GDB detach, to free target from debug mode
$_TARGETNAME configure -event gdb-detach {
    targets $_TARGETNAME
    resume
}

# MT7687 initialization, unlock SWD lock
set init_done 0
proc mt7687_init {} {
    global init_done
    global _TARGETNAME
    if {$init_done == 0} {
        echo "Initialize MT7687"
        # unlock SWD
        targets $_TARGETNAME
        mww 0x8300F050 0x76371688
        mww 0x8300F050 0x76371688
        mww 0x8300F050 0x76371688

        set init_done 1
    }
}
# Hook for reset, to clear init_done flag
$_TARGETNAME configure -event reset-start {
    global init_done
    set init_done 0
}

# Hook for reset & init, to execute initialization steps
$_TARGETNAME configure -event reset-init {
    mt7687_init
}

puts "Load MT7687(CMSIS-DAP) configuration done"

```

8) Place the board configuration file under <openocd\_root>\share\openocd\scripts\board.

Start debugging with the LinkIt 7687 HDK:

- 1) Copy the project .elf file from project Build folder to GCC tool path, such as <gcc\_root>. For example, <sdk\_root>\out\mt7687\_hdk\iot\_sdk\_demo\mt7687\_iot\_sdk\_demo.elf.

- 2) Open the Windows command window to run openOCD.
- 3) Change the directory of command window to openOCD tool folder, such as <openocd\_root>\bin.
- 4) Disconnect the micro-USB cable to power off the board.
- 5) Set the board to **FLASH Normal** mode.
- 6) Reconnect the micro-USB cable and press the reset button to power on the board.
- 7) Run the command to start the openOCD.

```
openocd.exe -s ..\share\openocd\scripts -f board\mt7687.cfg
```

- 8) Open the Windows command window to run [openOCD](#) GNU project debugger (GDB)..
- 9) Change the directory of the command window to the tool folder, such as <gcc\_root>\bin.
- 10) Run the command to start the GDB.

```
arm-none-eabi-gdb.exe <gcc_root>\mt7687_iot_sdk_demo.elf
(gdb) target remote localhost:3333
(gdb) monitor reset init
(gdb) load
(gdb) info registers
(gdb) x/10i $pc
```

You now have an [openOCD debugger](#) running on your system.


 Note, openOCD debugging cannot work if enter sleep mode, for more detail information, please refer to the document LinkIt for RTOS Power Mode Developers Guide under <sdk\_root>/doc.

## 2.3. Developing on LinkIt 2523 HDK

### 2.3.1. Configuring the LinkIt 2523 HDK

Before commencing the application development, you need to configure the HDK.

The front view of the LinkIt 2523 HDK is shown in Figure 13.

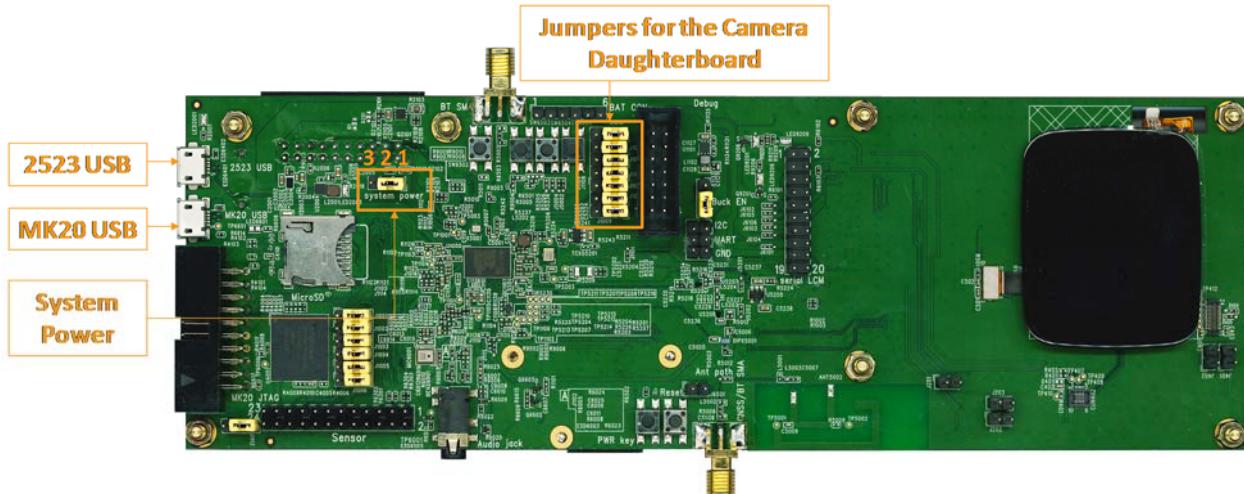

**Figure 13. USB connectors on the LinkIt 2523 development board**

The **2523 USB** can be used for powering up the board and downloading the binary using the MT2523 Flash Tool. The **MK20 USB** can be used for debugging with GDB and downloading the binary using Keil IDE.

To power up the board with **2523 USB**, connect the **system power** jumper pins 3 and 2 for USB power mode. Connect the pins 2 and 1 to power up with the battery, as shown in Figure 13.

### 2.3.2. Installing MT2523 Flash Tool for LinkIt 2523 HDK

MT2523 Flash Tool is a flexible device flashing tool for application development on LinkIt 2523 HDK.

To install the MT2523 Flash Tool:

- 1) If you don't have the SDK package yet, download the LinkIt SDK v4 package from [here](#).
- 2) Extract the content of the SDK package and navigate to the **tools** folder, and extract the **PC\_tool\_Win.zip** package.

In the extracted **PC\_tool\_Win** folder, navigate to **MT2523\_FlashTool** folder. The tool is a setup free package, and the **FlashTool.exe** inside the folder can be executed directly.

### 2.3.3. Installing the LinkIt 2523 HDK drivers on Microsoft Windows

This section describes how to install LinkIt 2523 HDK drivers on PCs running Microsoft Windows. The two USB ports, **2523 USB** and **MK20 USB**, require different drivers. Follow the instructions below to install them.

#### 2.3.3.1. Install 2523 USB Driver on Windows 7 or earlier

To install the MediaTek USB Port driver for **2523 USB** port on the HDK on Windows 7 or earlier versions of Windows:

- 1) Install the MediaTek USB Port driver from MS\_USB\_ComPort\_Driver folder located in MT2523\_FlashTool folder.
- 2) Execute InstallDriver.exe to install the driver.
- 3) Connect the **2523 USB** connector on the LinkIt 2523 HDK to your computer's USB port with a USB cable.

### 2.3.3.2. Install 2523 USB Driver on Windows 8 or later

If you are using Windows 8 or later, follow the instructions here:

- 1) Connect the **2523 USB** connector on the LinkIt 2523 HDK to your computer's USB port with a USB cable.
- 2) Open Windows **Control Panel** and click **System**, then click **Device Manager**.
- 3) An **Unknown device** will show under **Universal Serial Bus Controllers**. Double click the **Unknown device** and click **Update Driver...** (see Figure 14).


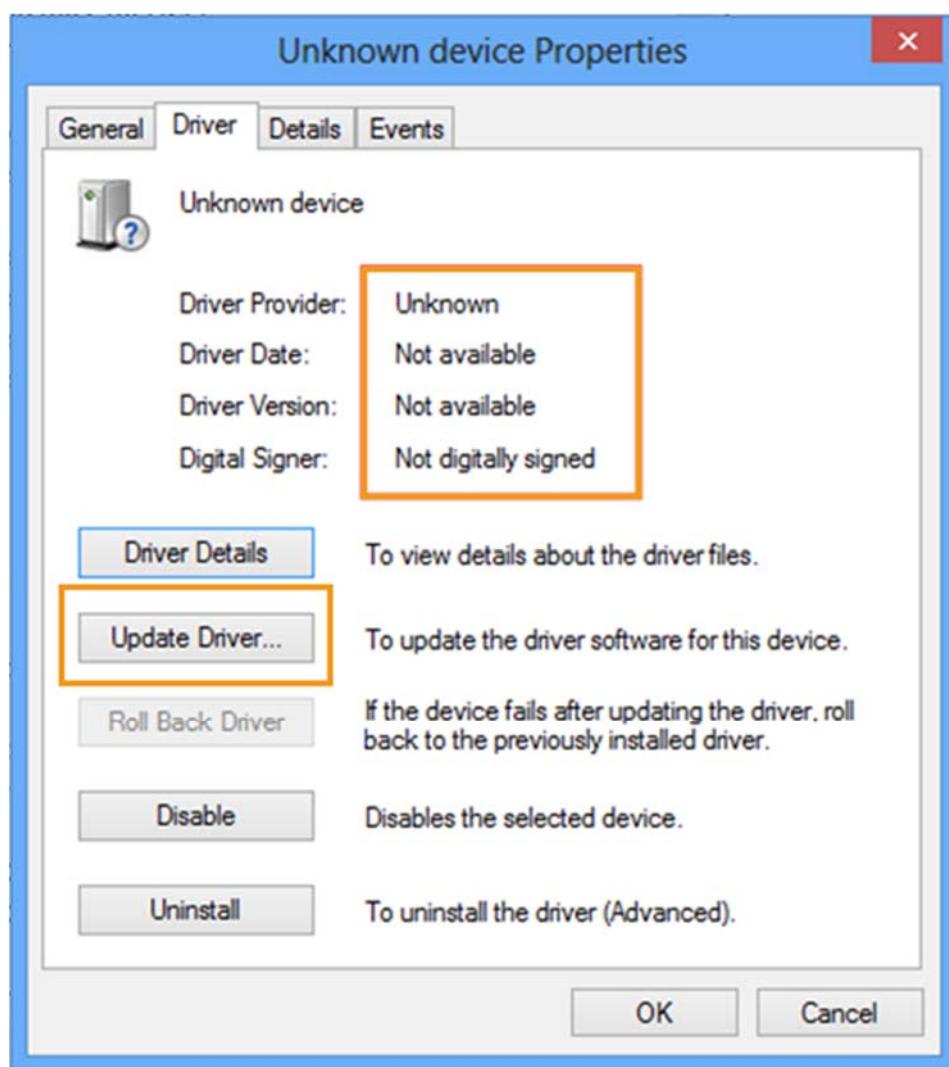


Figure 14. Unknown device on Windows 8 or later

- 4) Click **Browse my computer for driver software**, as shown in Figure 15.

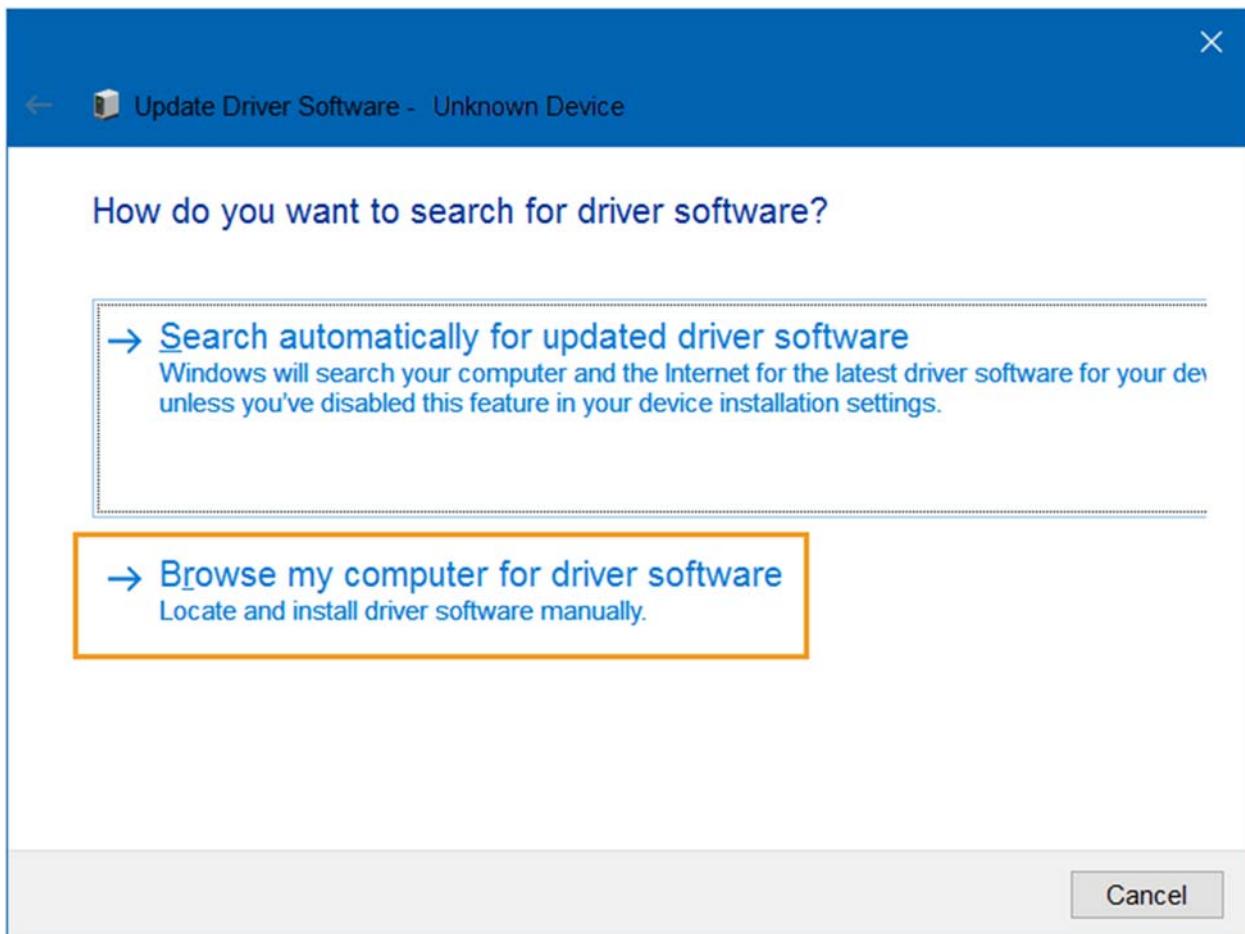

**Figure 15. Browse my computer for driver software**

- 5) Browse to the driver installation path, such as MS\_USB\_ComPort\_Driver\v1.1032.1\Win7, then click **Next**. After a few seconds, the driver software and MTK USB Port device should be installed, as shown in Figure 16.

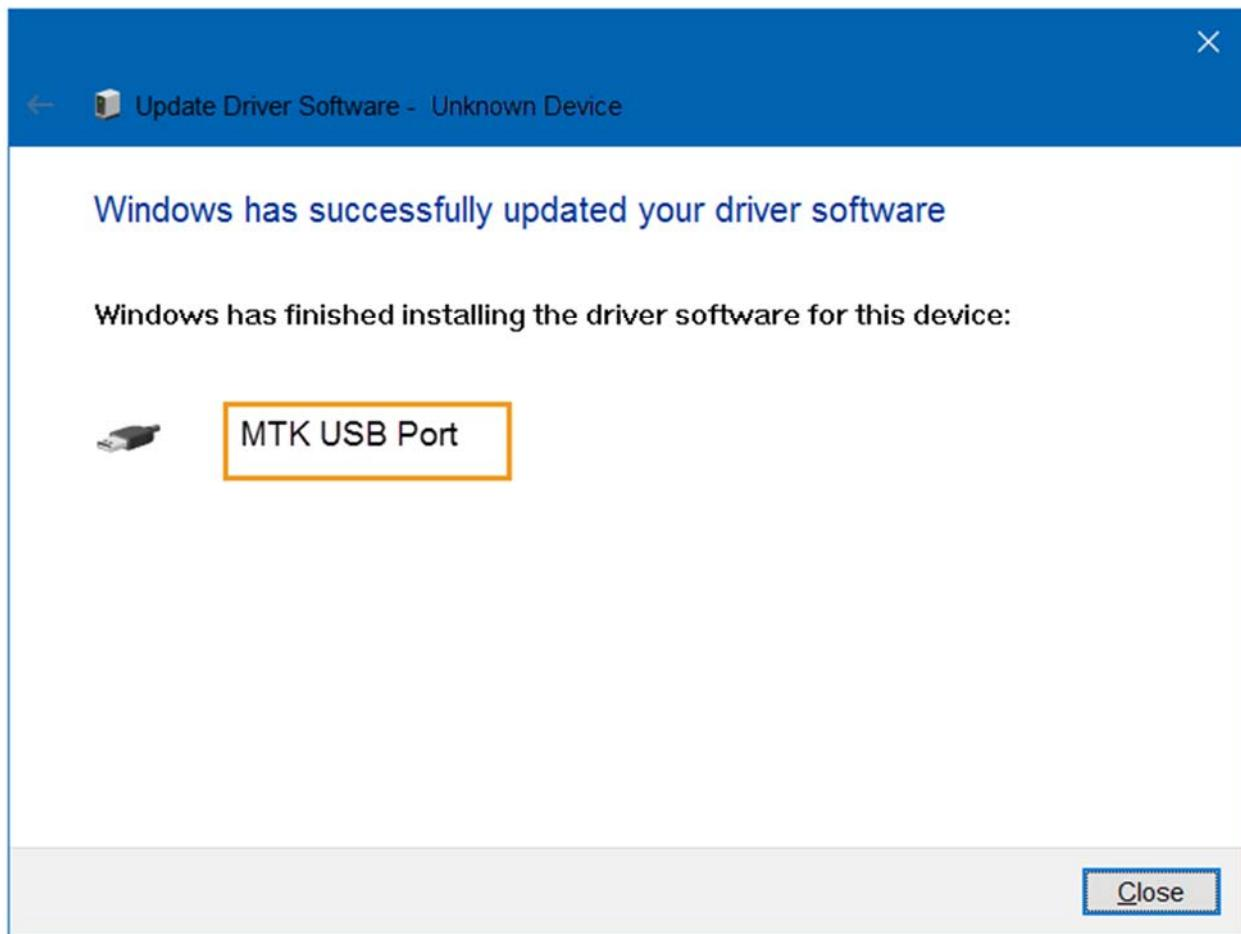


Figure 16. MTK USB Port on Windows 8 or later

### 2.3.3.3. Confirm COM port number of MTK USB Port

To determine the COM port number of the installed device:

- 1) Open Windows **Control Panel** and click **System** then
  - a) On Windows 7 and 8, click **Device Manager**.
  - b) On Windows XP, click the **Hardware** tab and then **Device Manager**.
- 2) In **Device Manager**, navigate to **Ports (COM & LPT)** and locate **MTK USB Port (COMx)**, as shown in Figure 17.

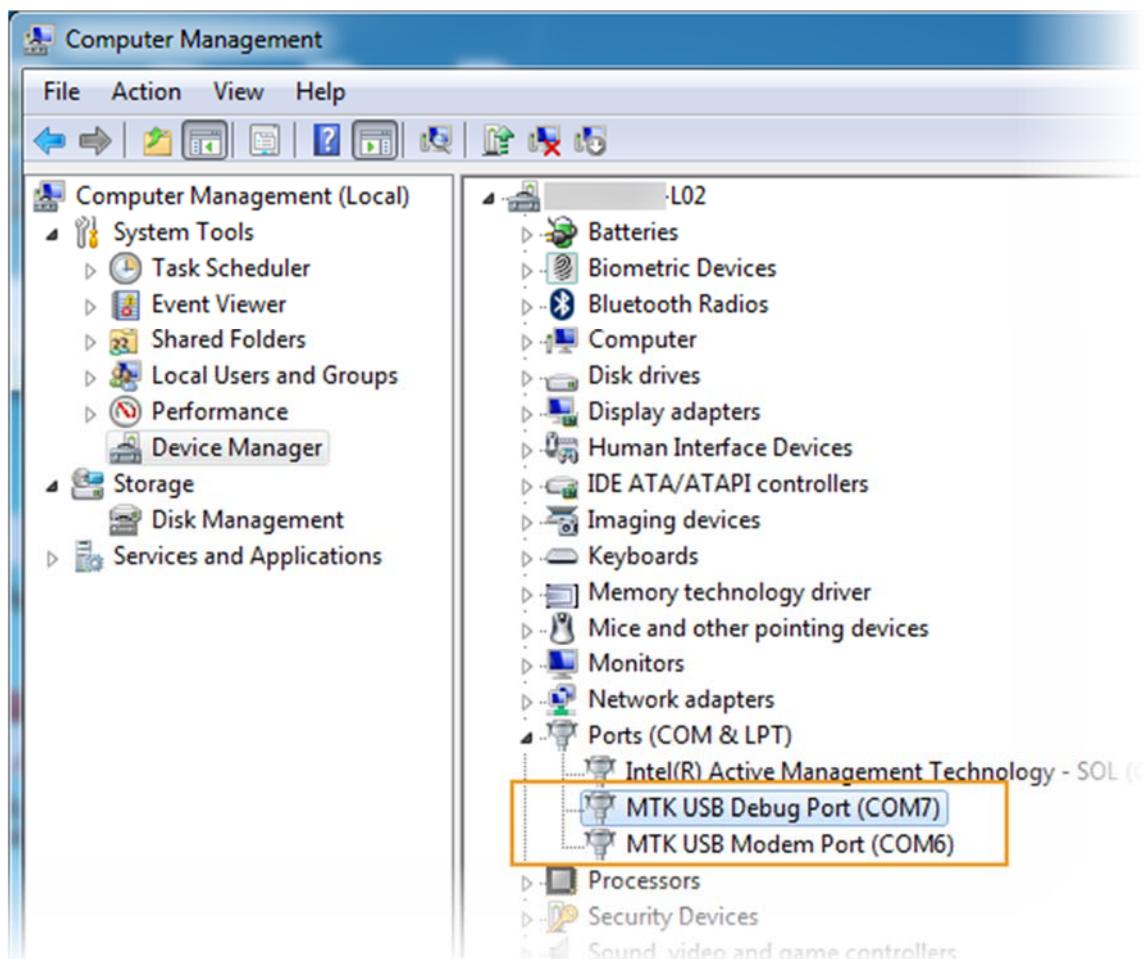


Figure 17. Debug and modem ports for MTK USB port

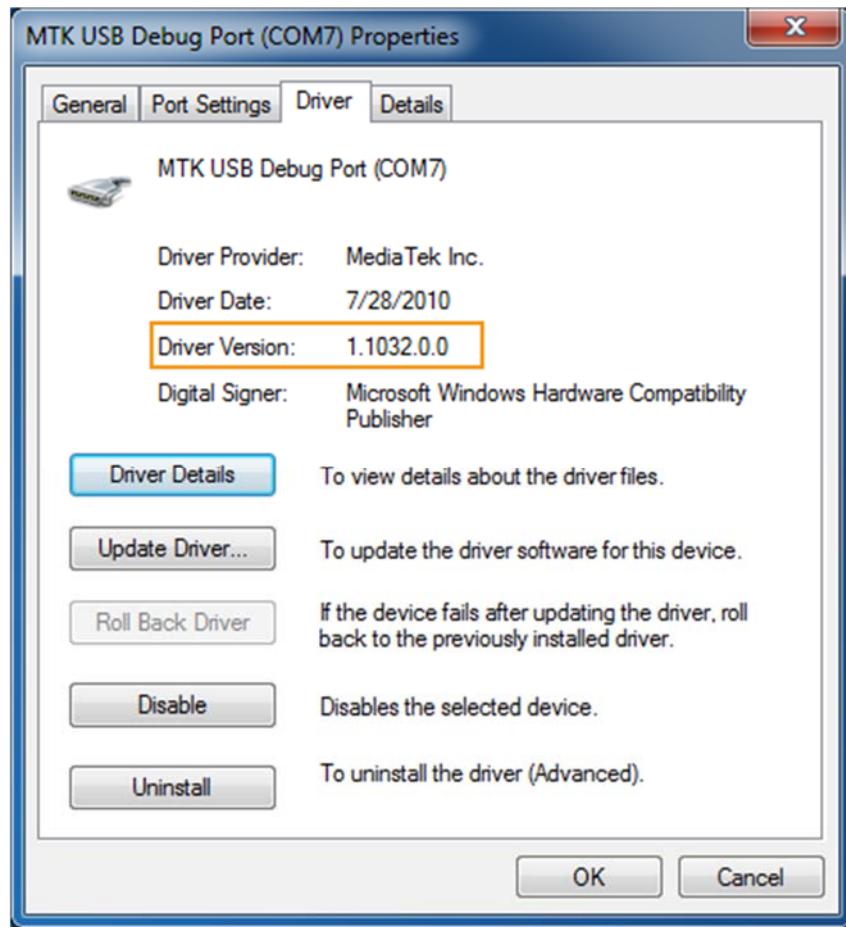


Figure 18. MTK USB driver version in MTK USB Debug Port Properties

Note, the driver version must be **1.1032.0** or later; an older driver doesn't guarantee successful download and operation. If the driver is before 1.1032.0, upgrade your SDK.

#### 2.3.3.4. Install MK20 USB Driver

The MK20 USB port provides 3 different USB devices:

- CMSIS-DAP debug device. Keil and IAR IDEs use this device to download and debug programs.
- mbed serial port (COM port) that connects the UART2 of the board. This serial port relays to the UART2 interface of the board and serves as the primary system log output interface for most of the SDK example projects.
- A virtual mass storage device to download a binary image to the board by simply copying the binary file to the storage device.

Only the mbed serial port requires additional driver installation. Install mbed serial port driver to use the USB serial port on Windows OS for debugging:

- 1) Download and install the Windows serial port driver from [here](#).

- 2) Connect the board to the computer through **MK20 USB**.
- 3) Open Windows Control Panel, click **System** and:
  - On Windows 7 and 8, click **Device Manager**.
  - On Windows XP, click the **Hardware** tab and then **Device Manager**.
- 4) In **Device Manager**, navigate to **Ports (COM & LPT)** (see Figure 19).

- 5) A new COM device should appear under **Ports (COM & LPT)**, as shown in the figure below. Note the **COMx** port number of the **mbed Serial Port**. Use this port to receive system logs from the LinkIt 2523 HDK.

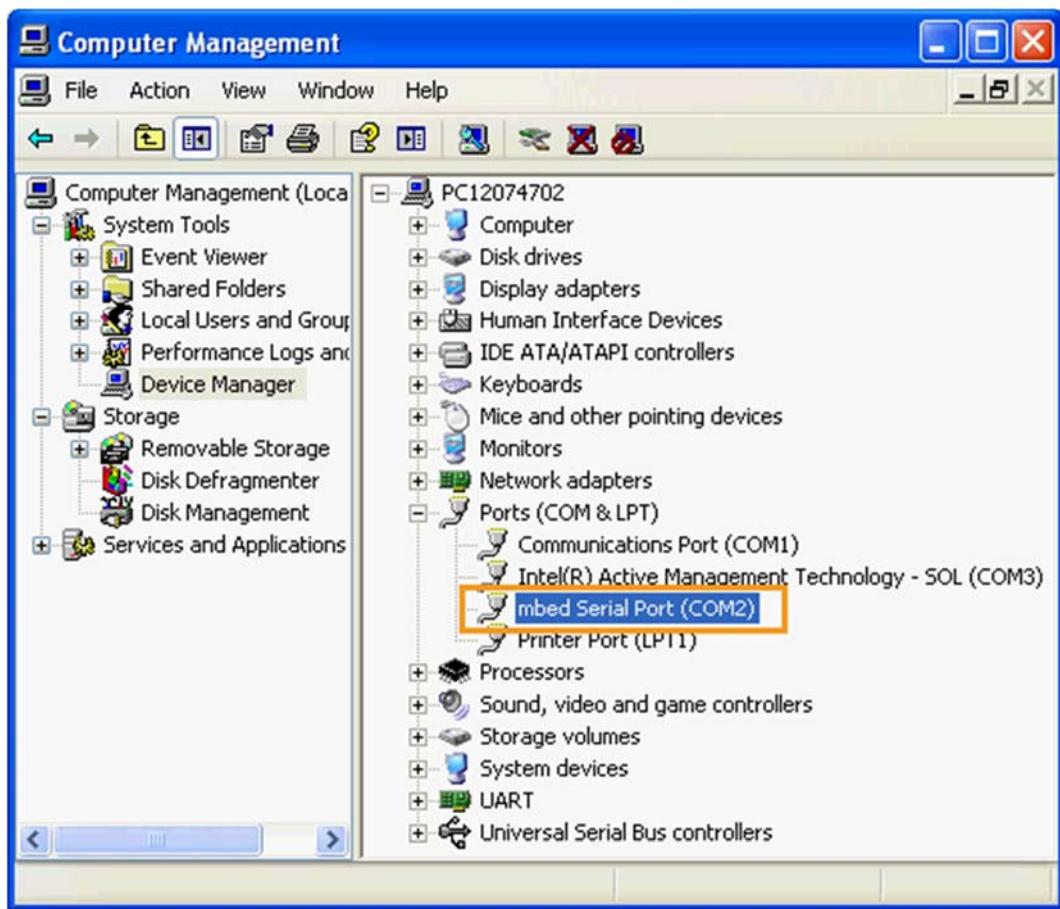


Figure 19. mbed Serial Port

#### 2.3.4. Flashing the image to LinkIt 2523 HDK

Before using the MT2523 Flash Tool, make sure you have a pre-build project file (.cfg) or build your own project to get one (see 2.4, “Building the project using the SDK”).

There are two methods to flash the image to LinkIt HDK: using the MT2523 Flash Tool or using the device as a removable storage device.

##### 2.3.4.1. Using the Flash tool

To download the firmware to the target device, use the **2523 USB** interface (see Figure 20):

- 1) Power off the target (USB cable must be unplugged).
- 2) Launch MT2523 Flash Tool, and click **Download** on the left panel of the main GUI.
- 3) Select **USB** from the **COM Port** drop down menu. If you don't have the adapter or battery, click the **Enable Download without Battery** option.

Click **Open** to provide the configuration file, which is usually named as `flash_download.cfg` and is generated after build process. If it loads successfully, **Download Information** will be displayed, including **Name**, **Length** and **File Path** of the firmware binary, as shown in Figure 20.

- 4) Click **Start** to start downloading.
- 5) Plug in the USB cable to power on the HDK through the **2523 USB** connector and then the process will start automatically.


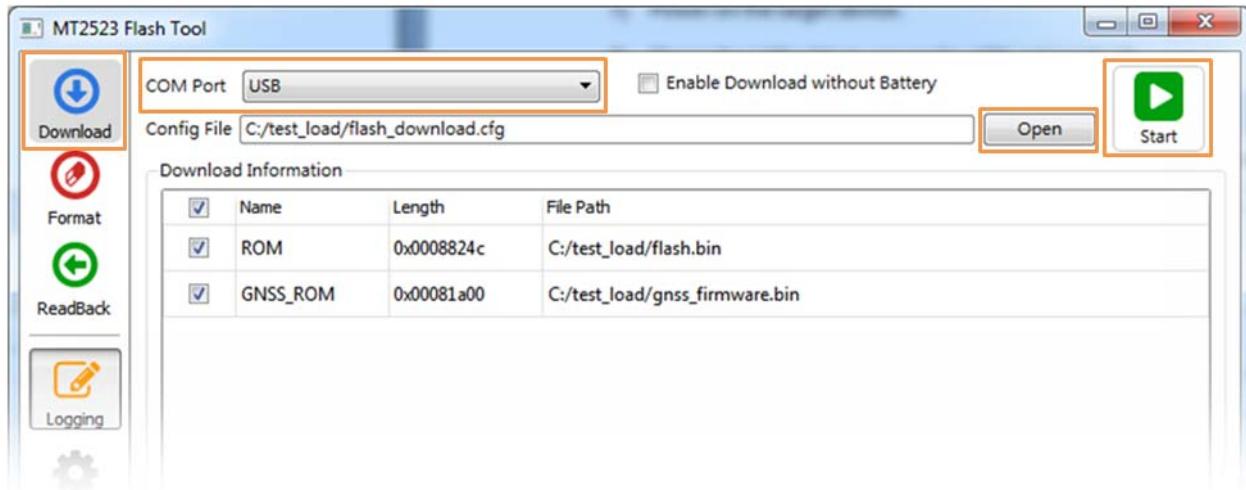


Figure 20. Download the firmware to a target device using USB connection

#### 2.3.4.2. Using the LinkIt 2523 HDK as a removable storage device

To update the project image (example project image: `iot_sdk_demo.bin` (see 2.4, “Building the project using the SDK”)) use the LinkIt 2523 development board as a removable disk drive according to the following steps:

- 1) Connect the LinkIt 2523 HDK to your PC with a micro-USB cable to **MK20 USB** connector.
- 2) Navigate to **Computer** on your PC to check if a new mass storage named **MT2523** is available under **Devices with Removable Storage**, as shown in Figure 21.

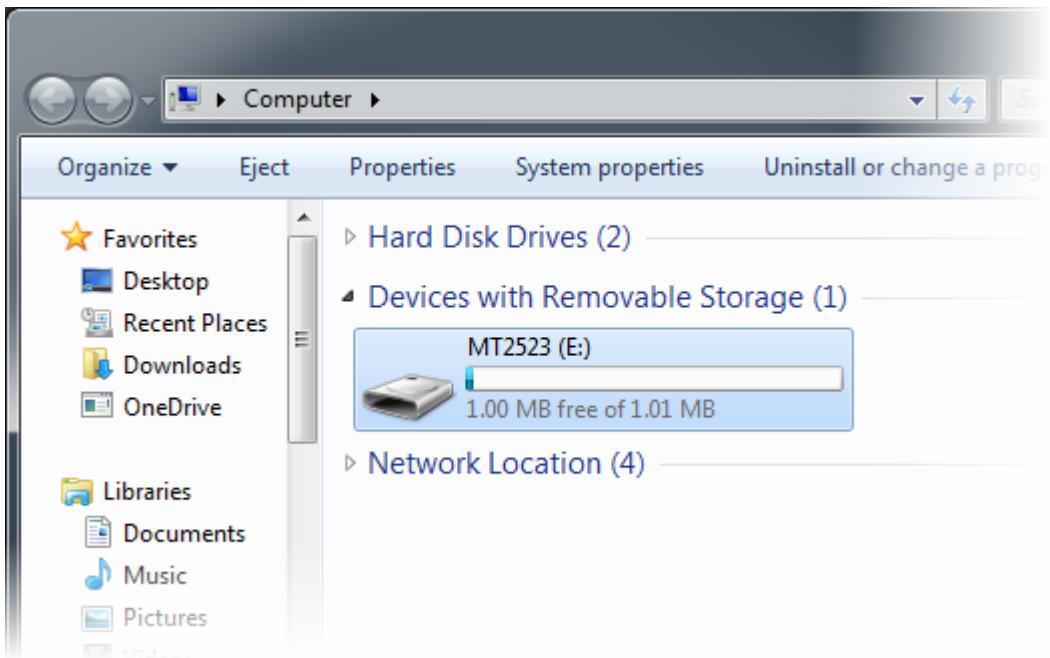

**Figure 21. LinkIt 2523 HDK connected as removable disk storage**

- 3) Open the **MT2523** removable storage, then drag and drop the project image, for example `iot_sdk_demo.bin`, from the original image folder to complete the update of the project image on the flash.
- 4) Wait for the mass storage device to disappear and re-appear again. After it reappears, check if there is no `fail.txt` in the 2523 mass storage. If there is no such file, the download has completed successfully. If `fail.txt` exists and its content is SWD ERROR, disconnect the MK20 USB port first, and make sure that you copy the `iot_sdk_demo.bin` file **within 15 seconds** after re-connecting to the **MK20 USB** port.

### 2.3.5. Running the project on LinkIt 2523 HDK

Most of the example projects for the LinkIt 2523 HDK facilitate the on-board mbed serial port to output logs and accept user inputs. Therefore, you'll need to setup a terminal application that connects to the serial port, such as [TeraTerm](#) terminal emulator software. You can use any other terminal application of your choice.

#### 2.3.5.1. Terminal application setup

If you already have a terminal application installed, skip to the next section to configure the serial port.

To install TeraTerm, follow the steps below:


- 1) Download the latest version of TeraTerm installer from [here](#).
- 2) Launch installer, such as `teraterm-4.91.exe`, and simply follow the steps using default options to complete the installation.

#### 2.3.5.2. Serial port settings

All example projects use the same serial port configuration. Apply the following configuration settings in your terminal application:

If you are using TeraTerm:

- 1) Launch **TeraTerm** and then click **Setup** on the top menu of the command window.
- 2) Click to open **Serial Port...** setup.
- 3) Select the COM port number that maps to the mbed serial port shown in Figure 5.
- 4) Set the **Baud rate**, **Data**, **Parity**, **Stop** and **Flow control** parameters (see Figure 22). Leave the **Transmit delay** fields with default values (0), and click **OK**.

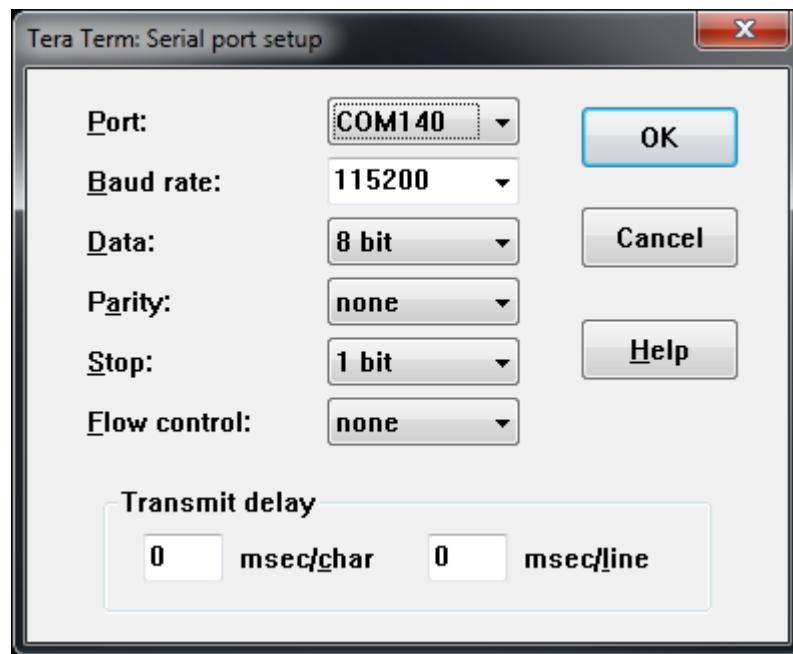

*Figure 22. Serial port setup*

- 5) To apply this setting to all future serial port connections, select **Setup** and then **Save Setup...**, and save the TERATERM.INI file to the TeraTerm program folder, the default location is at C:\Program Files (x86)\teraterm.

### 2.3.5.3. Run the project


To run the project on LinkIt 2523 HDK after downloading a project binary, reboot the board:

- 1) Disconnect the micro-USB cable to power off the LinkIt 2523 HDK.
- 2) Reconnect the USB cable to **MK20 USB** port to power on the LinkIt 2523 HDK.



Note, pressing the on-board **Reset** key won't reboot the board completely. After downloading a new firmware, you must un-plug the micro USB cable and plug it back to perform a complete reboot.

- 3) Open the terminal application and connect to the mbed serial port. If you are using TeraTerm, select **File** and then **New Connection...** from the menu bar, and then select **Serial**. Provide the **Port** corresponding to **mbed Serial Port**, as shown in Figure 23, and click **OK**.

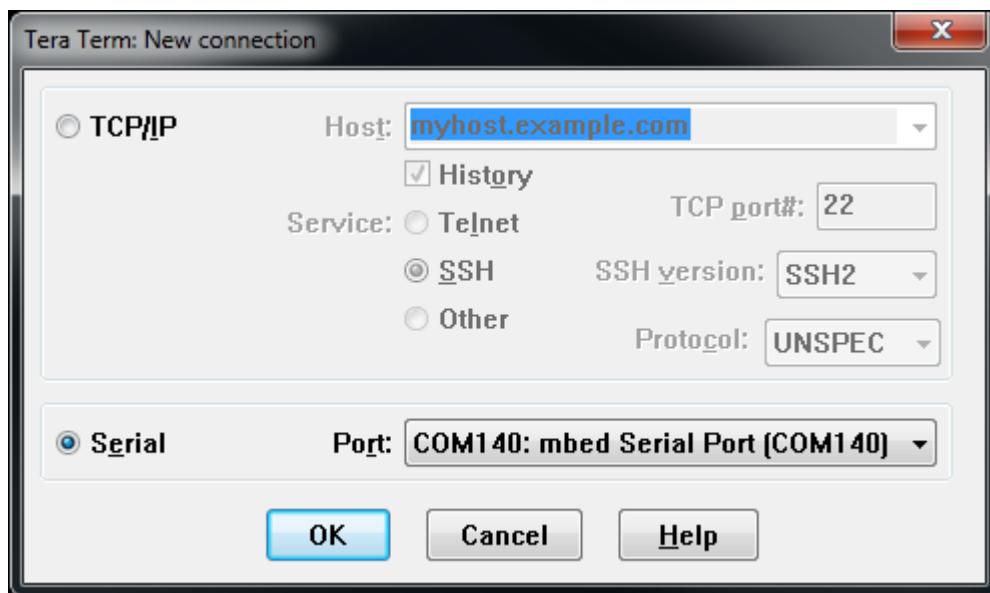**Figure 23. Connect to mbed Serial Port**

- 4) Wait for 15 seconds and the board will boot up. Then observe the system log output from the terminal window, such as:

```
[2016-04-28 15:01:11.365]
PSRAM Memory Test Pass!!custom_setSFIExt
[2016-04-28 15:01:11.365]
NOR_init
[2016-04-28 15:01:11.365]
hal_flash_init
[2016-04-28 15:01:11.365]
gpdac_sram_power_down
[2016-04-28 15:01:11.365]
config bonding io register
```

### 2.3.6. Debugging with the LinkIt 2523 HDK from Microsoft Windows

This section describes how to debug a project built with the GCC compiler using openOCD debugger tool.

Before commencing project debugging on your LinkIt 2523 HDK, install supporting software on Windows OS.

- 1) Download openocd-0.9.0 from [here](#) and unzip it into <openocd\_root> folder.
  - a) Download the GCC toolchain from [here](#) for your Windows version and unzip it into <gcc\_root> folder.
- 2) Install the [mbed serial port driver](#), if the serial port driver is not installed (see MT2523 Flash Tool User's Guide).
- 3) Get a patched openocd.exe.
  - a) Create a board configuration file named build\_openocd\_patch.sh and copy the following content to the file.

```
#!/bin/bash

sudo apt-get update
sudo apt-get -y install wget
```

```

sudo apt-get -y install git
sudo apt-get -y install build-essential
sudo apt-get -y install autoconf
sudo apt-get -y install automake
sudo apt-get -y install libtool
sudo apt-get -y install texinfo
sudo apt-get -y install mingw-w64-i686-dev
sudo apt-get -y install mingw-w64
sudo apt-get -y install pkg-config

mkdir -p $HOME/source
cd $HOME/source && wget
http://sourceforge.net/projects/libusb/files/libusb-1.0/libusb-
1.0.20/libusb-1.0.20.tar.bz2 && \
tar xjvf libusb-1.0.20.tar.bz2

cd $HOME/source && git clone http://github.com/signall11/hidapi.git
cd $HOME/source/hidapi && ./bootstrap

cd $HOME/source && git clone http://git.code.sf.net/p/openocd/code
openocd
cd $HOME/source/openocd && git checkout v0.9.0 && ./bootstrap && \
sed -i 's/dap_ap_select(dap, 0)/dap_ap_select(dap, 3)/g'
src/target/arm_adi_v5.c

mkdir -p $HOME/build/libusb
mkdir -p $HOME/build/hidapi
mkdir -p $HOME/build/openocd

cd $HOME/build/libusb && $HOME/source/libusb-1.0.20/configure --
prefix=$HOME/mingw --host=i686-w64-mingw32 && make && make install
cd $HOME/build/hidapi && $HOME/source/hidapi/configure --
prefix=$HOME/mingw --host=i686-w64-mingw32 && make && make install
export PKG_CONFIG_PATH=$HOME/mingw/lib/pkgconfig
cd $HOME/build/openocd && $HOME/source/openocd/configure --
prefix=$HOME/mingw --host=i686-w64-mingw32 --disable-internal-libjaylink
MAKEINFO=true && \
make && make install
cd $HOME && tar czvf mingw.tgz mingw

```

- b) Run the shell script on Linux OS to get the mingw.tgz.
- c) Copy the mingw.tgz to Windows OS and unzip it to <mingw\_root> folder, then copy the files <mingw\_root>\bin to <openocd\_root>\bin folder.
- d) Download [a dynamic linked library \(dll\)](#) file and copy it into <openocd\_root>\bin folder.

You can debug a project once it's built and downloaded to your HDK.

- 1) Create a board configuration file named mt2523.cfg and copy the following content to the file.

```

puts "Load MT2523(CMSIS-DAP) configuration"

# Use CMSIS-DAP debug interface
source [find interface/cmsis-dap.cfg]

source [find target/swj-dp.tcl]

# Setup variables
set _CPUTAPIID 0x3ba02477

```

```

set _CHIPNAME MT2523
set _TARGETNAME $_CHIPNAME.cm4

# Create DAP instance
swj_newdap $_CHIPNAME cpu -irlen 4 -expected-id $_CPUTAPID

# Create target instance
target create $_TARGETNAME cortex_m -endian little -chain-position
$_CHIPNAME.cpu

$_TARGETNAME configure -event gdb-attach {
    targets $_TARGETNAME
    halt
}

$_TARGETNAME configure -event gdb-detach {
    targets $_TARGETNAME
    resume
}

# Setup SWD frequence
adapter_khz 1000

puts "Load MT2523(CMSIS-DAP) configuration done."
2) Save the board configuration file into <openocd_root>\share\openocd\scripts\board folder.

```

Start debugging with LinkIt 2523 HDK:

- 1) Copy the project .elf file from project Build folder to GCC tool path, such as <gcc\_root>, for example, <sdk\_root>\out\mt2523\_hd़\iot\_sdk\_demo\iot\_sdk\_demo.elf.
- 2) Open the command window for openOCD.
- 3) Change the directory in the command window to openOCD tool folder, such as <openocd\_root>\bin.
- 4) Remove the micro-USB cables to completely power off the board.
- 5) Reconnect the micro-USB cable to **MK20 USB** port to power on the board.
- 6) Run the command to start the openOCD.

```
openocd.exe -s ..\share\openocd\scripts -f board\mt2523.cfg
```

- 7) Open the command window for [GNU project debugger \(GDB\)](#).
- 8) Change the directory in the command window to tool folder, such as <gcc\_root>\bin.
- 9) Run the command to start the GDB.

```

arm-none-eabi-gdb.exe <gcc_root>\iot_sdk_demo.elf
(gdb) target remote localhost:3333
(gdb) monitor reset init
(gdb) load
(gdb) info registers
(gdb) x/10i $pc

```

You now have an openOCD debugger running on your system.

Note, openOCD is a free third-party debugging tool (GPL license), for any issues or troubleshooting refer to openOCD official [forum](#). In addition, openOCD debugging cannot work if the system enters into sleep mode, for more detail information, please refer to the document LinkIt for RTOS Power Mode Developers Guide under <sdk\_root>/doc.

## 2.4. Building the project using the SDK

This section provides detailed guideline on how to set up the SDK build environment with default GCC on Linux OS and on Microsoft Windows using the [MinGW](#) cross-compilation tool and describes two methods on how to build a project.

### 2.4.1. Installing the SDK build environment on Linux

The default GCC compiler provided in the SDK is required to run on Linux OS. The following description is based on the Ubuntu 14.04 LTS environment.

**Note:** The LinkIt SDK can be used on any edition of Linux OS. The default GCC compiler provided in the SDK is based on the 32-bit architecture.

Before building the project, verify that you've installed the required toolchain for your build environment, as shown in Table 13.

**Table 13. Recommended build environment**

Item	Description
OS	Linux OS
make	GNU make 3.81
Compiler	Linaro GCC Toolchain for ARM Embedded Processors 4.8.4

The following command downloads and installs the basic building tools on Ubuntu.

```
sudo apt-get install build-essential
```

Note, a compilation error occurs when building the LinkIt SDK with the default GCC cross compiler on a 64-bit system without installing the package to support the 32-bit executable binary, as shown below.

```
/bin/sh: 4: tools/gcc/gcc-arm-none-eabi/bin/arm-none-eabi-gcc: not found
```

The commands to install the basic build tools and the package for supporting 32-bit binary executable on the Ubuntu 14.04 are shown below.

```
sudo dpkg --add-architecture i386
sudo apt-get update
sudo apt-get install libc6-i386
```

The watch projects using TouchGFX framework require installing Ruby to generate resource files. Find more information on how to install Ruby in  
< sdk\_root >\project\mt2523\_watch\apps\watch\_demo\readme.txt

Install the SDK package according to the instructions at < sdk\_root >\readme.txt. The default installation path of the GCC compiler is < sdk\_root >\tools\gcc, and the compiler settings are in the < sdk\_root >\.config configuration file.

Setup the BINPATH in the .config file, as shown below.

```
BINPATH = $(SOURCE_DIR)/tools/gcc/gcc-arm-none-eabi/bin
```

## 2.4.2. Installing the SDK build environment on Microsoft Windows

To build the project on Windows OS, install MinGW cross-compiler and integrate ARM GCC Toolchain for Windows with already installed Linkit SDK.

- 1) Download mingw-get-setup.exe from [here](#).
- 2) Launch the installer, and click **Install** (see Figure 24).


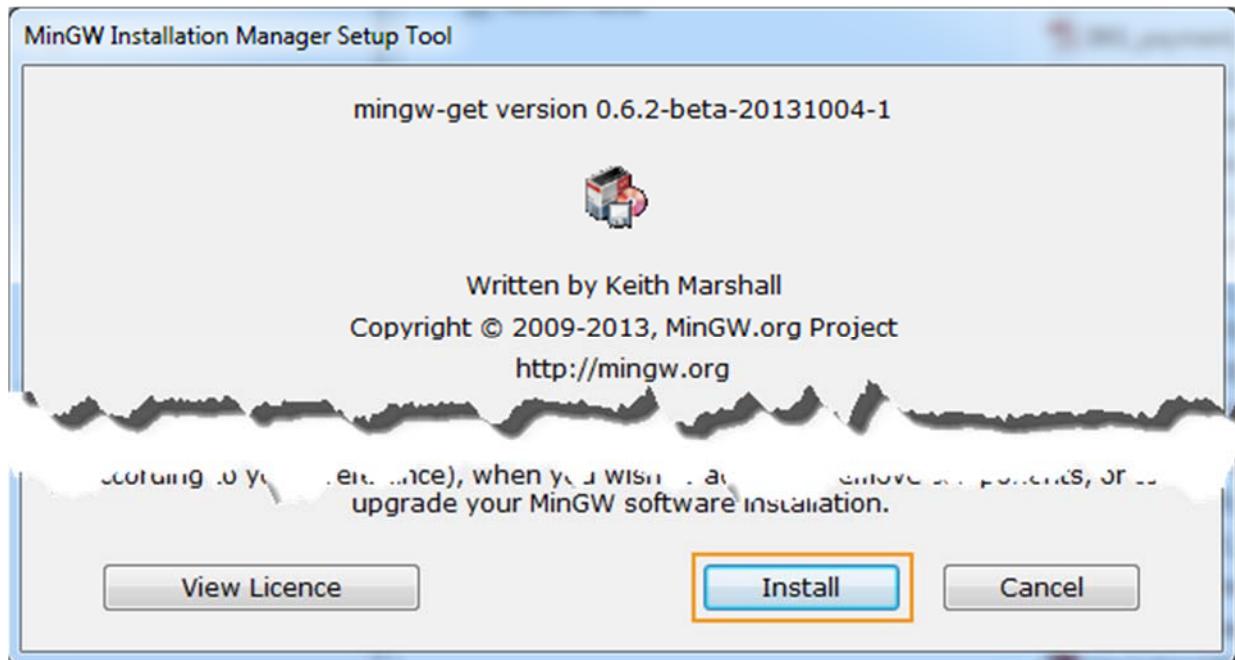



Figure 24. MinGW Installation Manager Setup Tool

- 3) Follow the on screen instructions and keep the default settings, then click **Continue** to download the tool to C:\MinGW installation directory (see Figure 25).

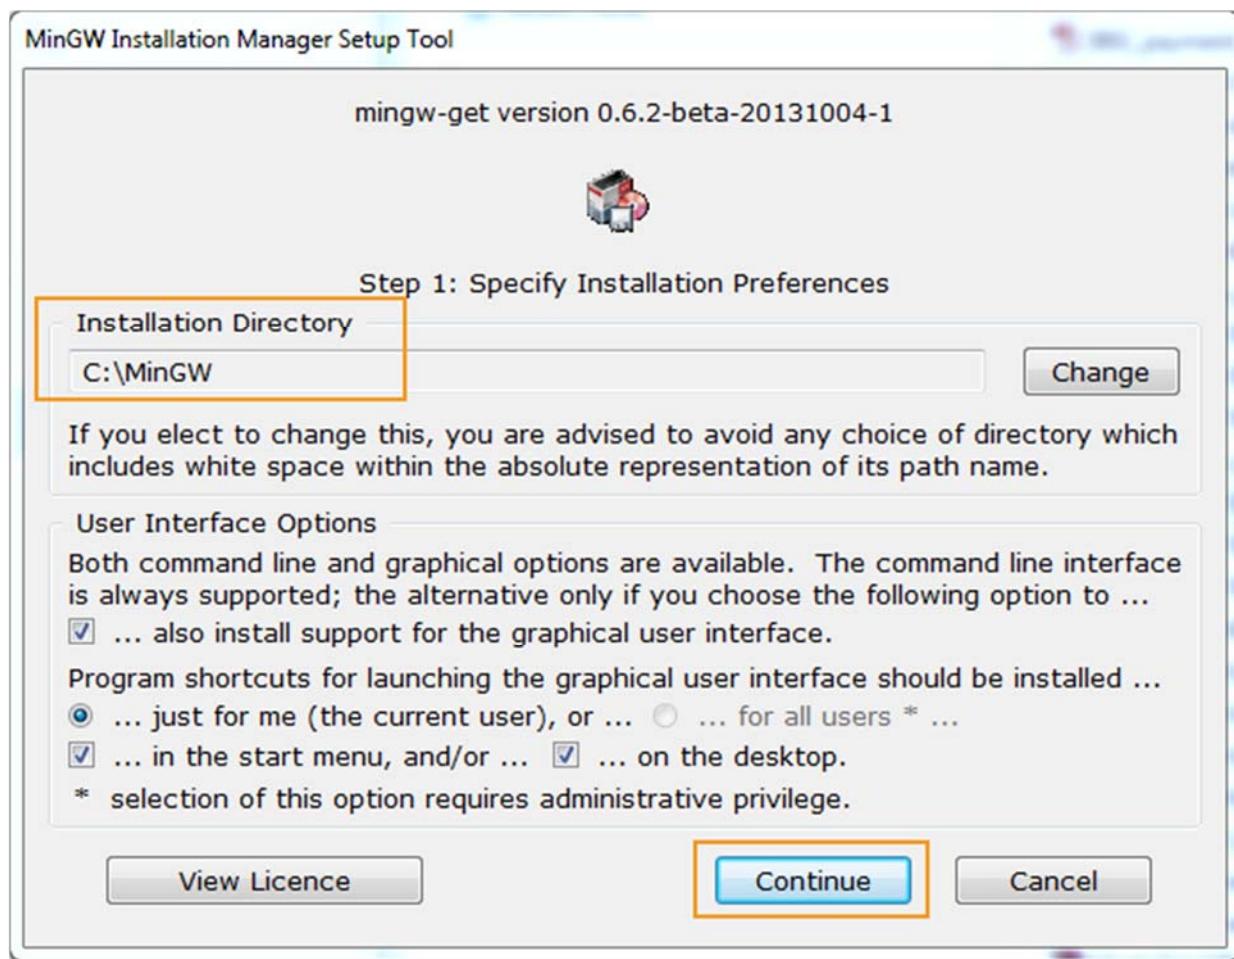


*Figure 25. Keep default installation preferences*

- 4) Click **Continue** on the **MinGW Installation Manager Setup Tool**, after the download is complete (see Figure 26).

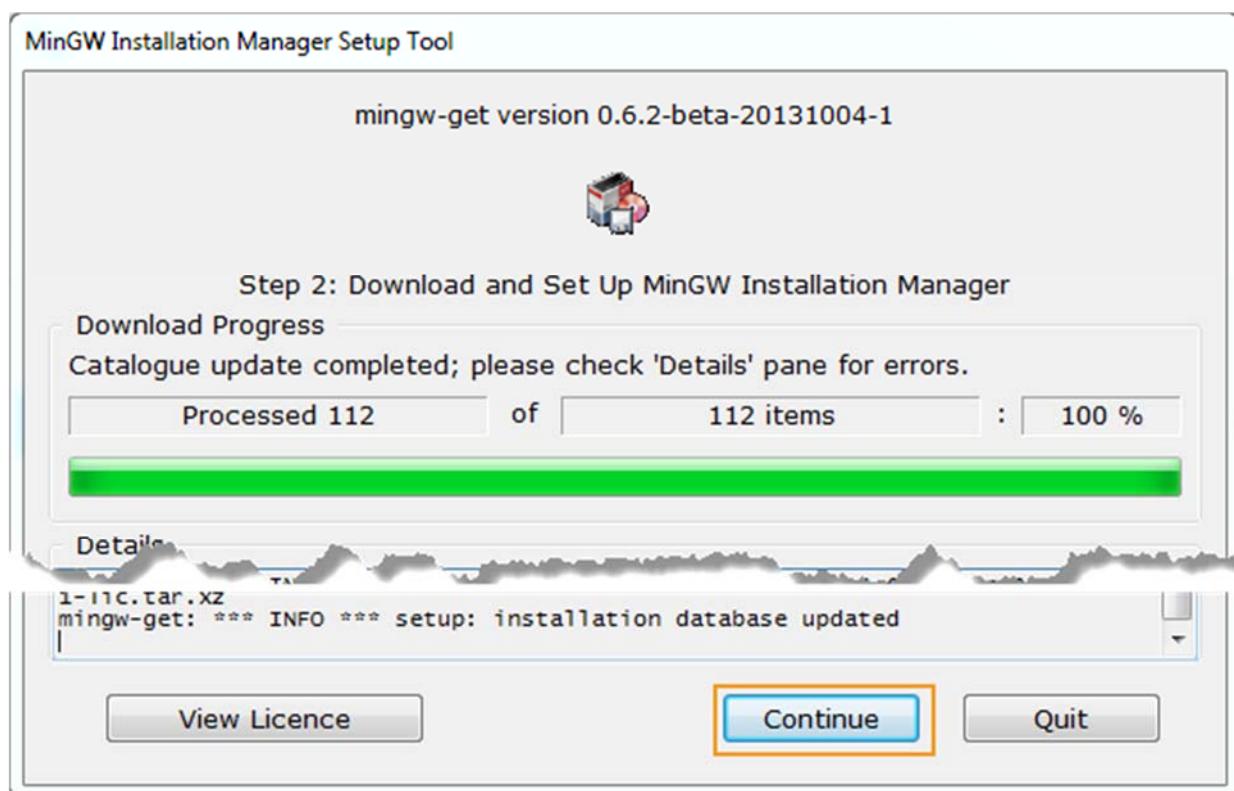


**Figure 26. Download and set up MinGW Installation Manager**

- 5) Select **msys-base** and **mingw32-base** from **Basic Setup** package list, and right click to bring up the menu options. Click **Mark for Installation** from the menu (see Figure 27).

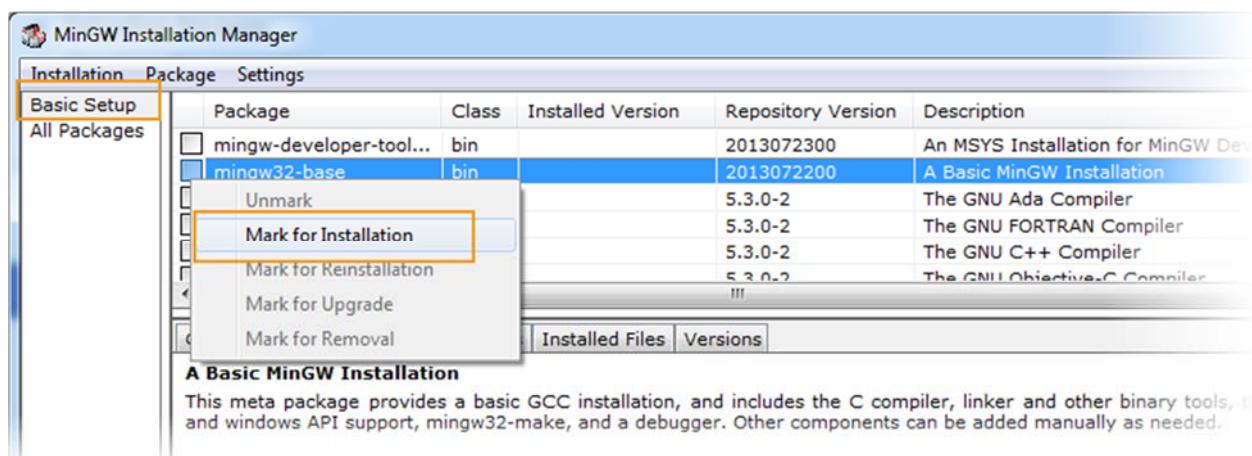


**Figure 27. Basic setup on MinGW Installation Manager**


- 6) Click **Apply Changes** from the **Installation** menu (see Figure 28).

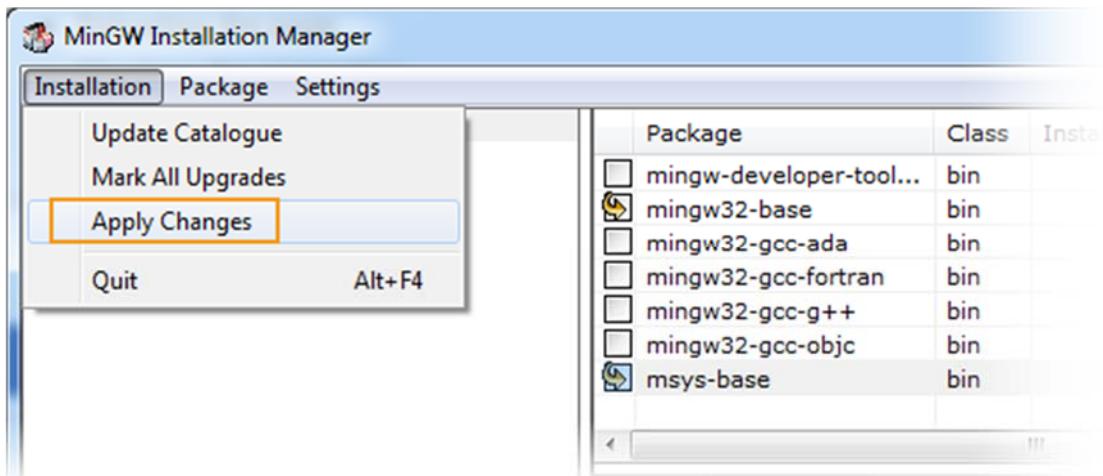**Figure 28. A basic MinGW installation**

- 7) Click **Apply** on the pop-up dialog window (see Figure 29).

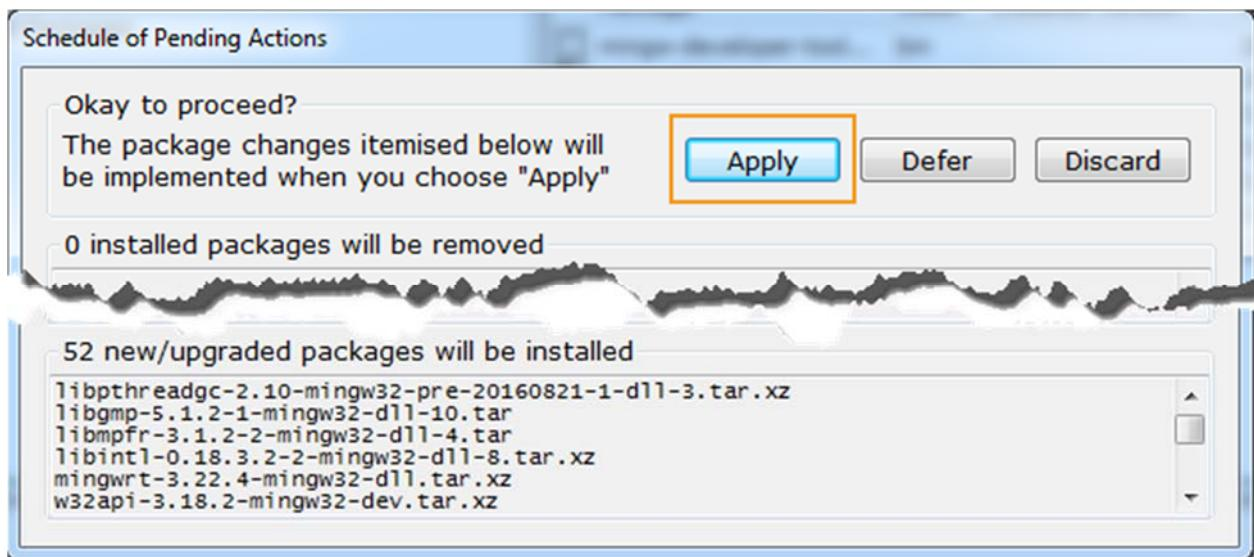**Figure 29. Schedule of pending actions**

- 8) Click **Close** to close the dialog window once the operation is complete (see Figure 30).

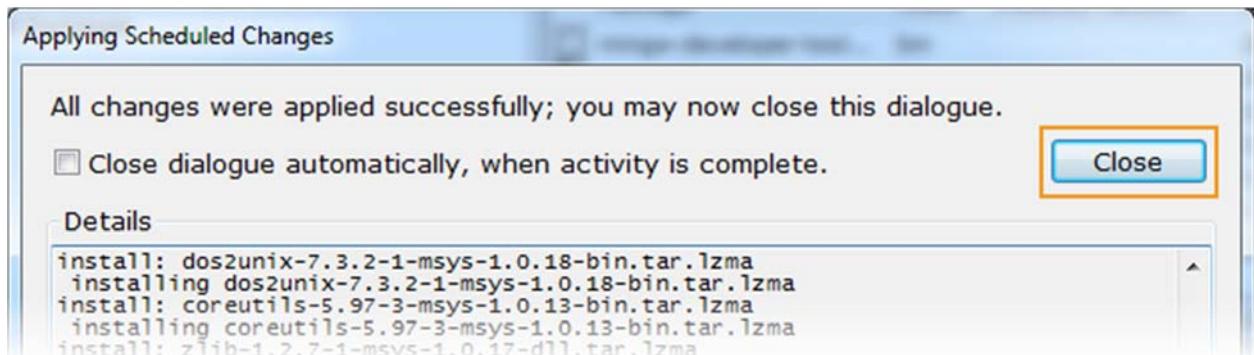**Figure 30. Applying scheduled changes**

- 9) Navigate to C:\MinGW\msys\1.0 folder and launch the MinGW terminal by running `msys.bat` to create `home/<user_name>` folder.
- 10) Copy the SDK to MinGW `home\<user_name>` folder, as shown in Figure 31.

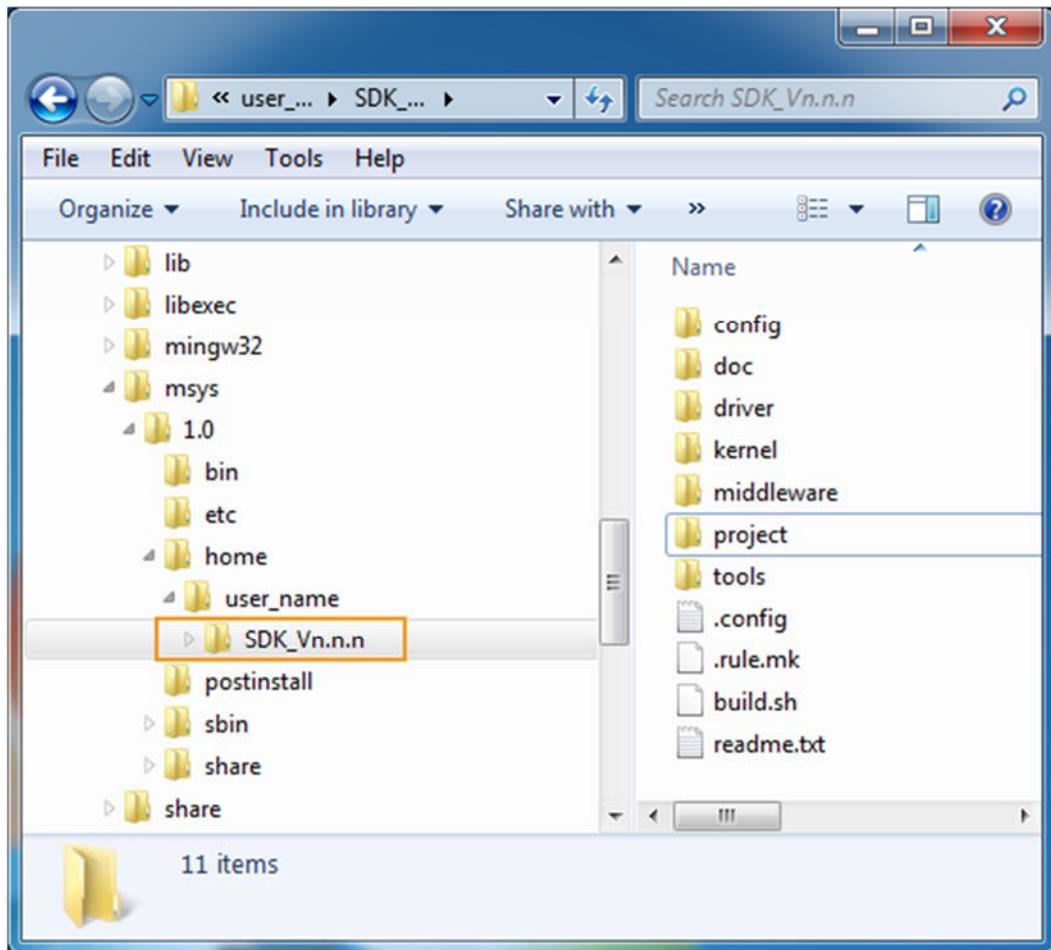
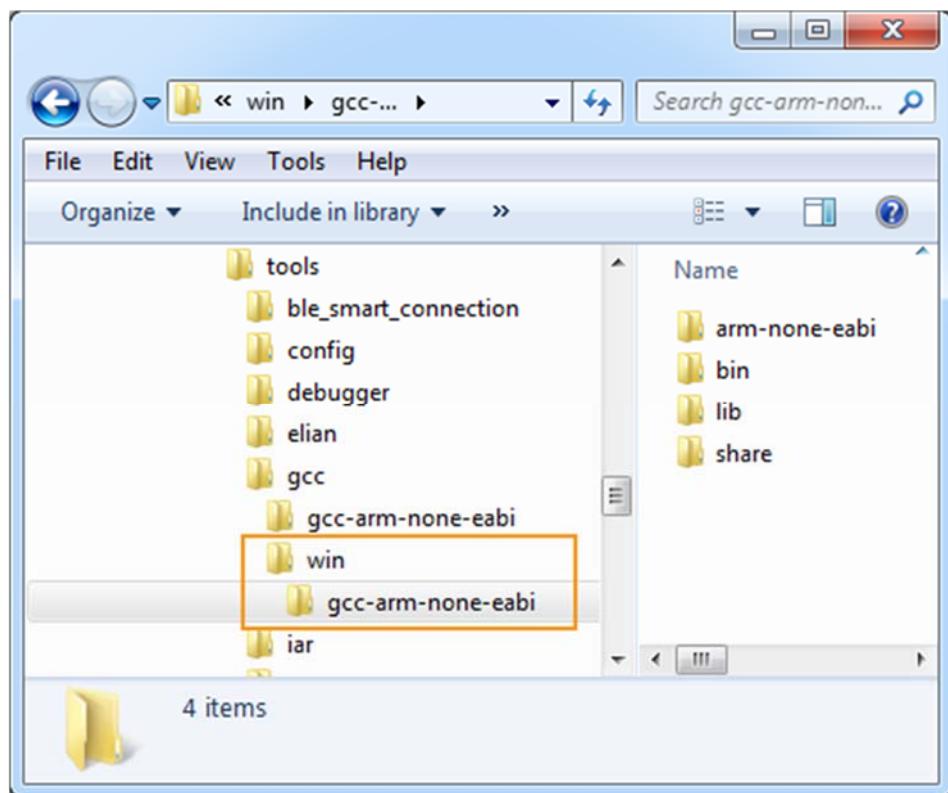


Figure 31. MinGW folder structure

- 11) Download ARM-GCC-win32 from [here](#).
  - a) Create a new folder named `win` under `<sdk_root>\tools\gcc`.
  - b) Unzip the content of `gcc-arm-none-eabi-4_8-2014q3-20140805-win32.zip` to `<sdk_root>\tools\gcc\win\` folder.
  - c) Rename the unzipped `gcc-arm-none-eabi-4_8-2014q3-20140805-win32` folder to `gcc-arm-none-eabi`, as shown in Figure 32.

**Figure 32. tools\gcc folder structure**

- 12) Use build.sh to compile the project in MinGW32 console, as described in section 2.4.3, “Methods to build a project”.

### 2.4.3. Methods to build a project

This section describes two methods on how to build a project:

- Build a project from the SDK root directory.
- Build a project from the project GCC configuration directory.

#### 2.4.3.1. Building the project from the SDK root directory

Build the project using the script at <sdk\_root>\build.sh. To find out more about the script, navigate to the SDK’s root directory and execute the following command:

```
cd <sdk_root>
./build.sh
```

The outcome is:

```
=====
Build Project
=====
Usage: ./build.sh <board> <project> [bl|clean] <argument>

Example:
./build.sh mt7687_hd़k iot_sdk_demo
./build.sh mt7687_hd़k iot_sdk_demo bl      (build with bootloader)
./build.sh clean                      (clean folder: out)
./build.sh mt7687_hd़k clean          (clean folder: out/mt7687_hd़k)
```

```

./build.sh mt7687_hdk iot_sdk_demo clean  (clean folder:  

out/mt7687_hdk/iot_sdk_demo)

Argument:  

-f=<feature makefile> or --feature=<feature makefile>  

    Replace feature.mk with other makefile. For example,  

    the feature_example.mk is under project folder, -  

f=feature_example.mk  

    will replace feature.mk with feature_example.mk.  

-o=<make option> or --option=<make option>  

    Assign additional make options. For example,  

    to compile module sequentially, use -o=-j1;  

    to turn on specific feature in feature makefile, use -  

o=<feature_name>=y;  

    to assign more than one options, use -o=<option_1> -o=<option_2>.  

=====
List Available Example Projects
=====
Usage: ./build.sh list

```

- List all available boards and projects.

Run the command to show all available boards and projects:

```
./build.sh list
```

The available boards and projects are listed based on the related configuration files under <sdk\_root>/config/project/<board>/<project> folder. The console output is shown below.

```

=====
Available Build Projects:
=====
mt2523_hdk
    accdet_detect_earphone_status
    aes_encrypt_decrypt_data
    atci_register_command
    audio_mp3_play
    audio_play_1k_tone
    ...
mt2523_watch
    watch_demo
mt7697_hdk
    bootloader
    freertos_initialize_main_features
    iot_sdk

```

- Build the project.

To build a specific project, simply run the following command.

```
./build.sh <board> <project>
```

The output files will be placed under <sdk\_root>\out\<board>\<project> folder.

For example, to build a project on the LinkIt 2523 HDK, run the following build command.

```
./build.sh mt2523_hdk iot_sdk_demo
```

The standard output in the terminal window:

```
$ ./build.sh mt2523_hdk iot_sdk_demo
Build board:mt2523_hdk project:iot_sdk_demo
```

```
platform=MINGW32_NT-6.1
/usr/home/ user_name/SDK_vn.n.n
FEATURE=feature.mk
SENSOR_FUSION_ALGO
is ../../../../../../middleware/MTK/sensor_subsys/fusion_algo/co
mmon/lib_core
make: Entering directory
`/usr/home/user_name/SDK_vn.n.n/project/mt2523_hdळ/apps/
iot_sdk_demo/GCC'
...

```

The output files will be placed under <sdk\_root>\out\mt2523\_hdळ\iot\_sdk\_demo\ folder.

- Build the project with the "bl" option.

By default, the pre-built bootloader image file is copied to the <sdk\_root>\out\<board>\<project>\ folder after the project is built. The main purpose for the bootloader image is to download the Flash Tool.

Apply the "bl" option to rebuild the bootloader and use the generated bootloader image file instead of the pre-built one, as shown below.

```
./build.sh <board> <project> bl
```

 Note: The bootloader download mechanism is slightly different on LinkIt 2523 HDK from that on the LinkIt 76x7 HDK. On LinkIt 2523 HDK the bootloader image is combined with the project image file into a new image file named as flash.bin.

To build the project on the LinkIt 2523 HDK:

```
./build.sh mt2523_hdळ iot_sdk_demo bl
```

The output image file of the project and the bootloader, along with the merged image file flash.bin, will be placed under <sdk\_root>\out\mt2523\_hdळ\iot\_sdk\_demo folder.

To build the project on the LinkIt 76x7 HDK:

```
./build.sh mt7687_hdळ iot_sdk_demo bl
```

The output image file of the project and the bootloader will be placed under <sdk\_root>\out\mt7687\_hdळ\iot\_sdk\_demo folder.

- Clean the out folder

The build script <sdk\_root>\build.sh provides options to remove the generated output files as follows.

- 1) Clean the <sdk\_root>\out folder.

```
./build.sh clean
```

- 2) Clean the <sdk\_root>\out\<board> folder

```
./build.sh <board> clean
```

- 3) Clean the <sdk\_root>\out\<board>\<project> folder.

```
./build.sh <board> <project> clean
```

### 2.4.3.2. Building the project from the project GCC configuration directory

For this method, please follow the steps below:

- 1) Change the current directory to project source directory where the SDK is located.
- 2) There are makefiles provided for the project build configuration. For example, the iot\_sdk\_demo is built by the project makefile under <sdk\_root>\project\mt7687\_hdळ\apps\iot\_sdk\_demo\GCC.

- i) Navigate to the example project's location.

```
cd <sdk_root>/project/mt7687_hdk/apps/iot_sdk_demo/GCC
ii) Run the make command.
```

```
make
```

The output folder is defined under variable `BUILD_DIR` in the `Makefile` located at `<sdk_root>\project\mt7687_hdk\apps\iot_sdk_demo\GCC`:

```
BUILD_DIR = $(PWD)/Build
PROJ_NAME = mt7687_iot_sdk_demo
```

A project image `mt7687_iot_sdk_demo.bin` is generated under `<sdk_root>\project\mt7687_hdk\apps\iot_sdk_demo\GCC\Build`.


## 2.5. Create your own project

This section provides details on how to use an existing project and create your own project named `my_project` on LinkIt 7687 development board using `iot_sdk_demo` project as a reference.

### 2.5.1. Using an existing project

Apply an existing project as a reference design for your own project development.

- 1) Copy the folder `<sdk_root>\project\mt7687_hdk\apps\iot_sdk_demo` to a new directory `<sdk_root>\project\mt7687_hdk\apps\my_project`.

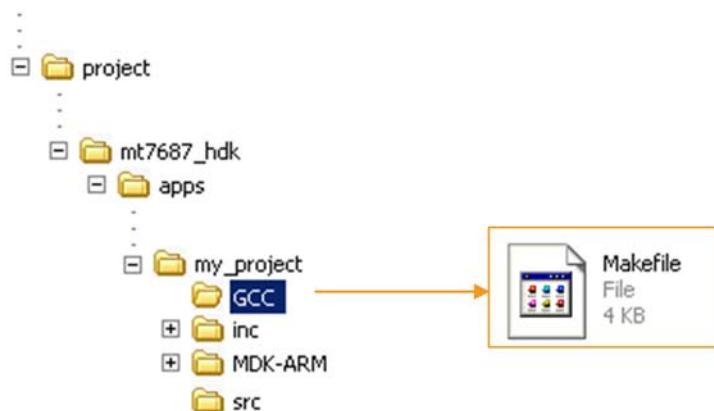

**Figure 33. Modify the Makefile under the GCC folder of my\_project**

- 2) Modify the following settings defined in the `<sdk_root>\project\mt7687_hdk\apps\my_project\GCC\Makefile` under the `GCC` folder (see Figure 33) `my_project`, as shown below:
  - `SOURCE_DIR`: the path to `<sdk_root>`.
  - `PROJ_NAME`: project name.
  - `APP_PATH`: project path.

```
...
SOURCE_DIR  = ../../../../..
BINPATH     = ~/gcc-arm-none-eabi/bin
PWD         = $(shell pwd)
DATETIME    = $(shell date --iso=seconds)
```

```
V          ?= 0
...
# Project name
PROJ_NAME      = mt7687_my_project
PROJ_PATH       = $(PWD)
OUTPATH         = $(PWD)/Build

APP_PATH        = project/mt7687_hd़/apps/my_project
APP_PATH_SRC    = $(APP_PATH)/src
...
```

### 2.5.2. Removing a module

The copied project has modules that could be removed in order to have a clean start for your project development. After the previous steps, a project with the same features has been created. It can be built to generate image file as the original project.

To remove a module:

- 1) Open the project **Makefile** from  
`<sdk_root>/project/mt7687_hd़/apps/my_project/GCC/Makefile.`
- 2) Locate the module include list of the project and remove any unwanted module by removing or commenting out the corresponding include statement.


```
...
#####
#####
#
# SDK source files
#
#####
#####
#include cJSON
include $(SOURCE_DIR)/middleware/third_party/cJSON/module.mk

#include XML
include $(SOURCE_DIR)/middleware/third_party/XML/module.mk

...
```

### 2.5.3. Add the source and header files

User defined project source and header files should be placed under the **src** and the **inc** folder respectively, as shown in Figure 34.

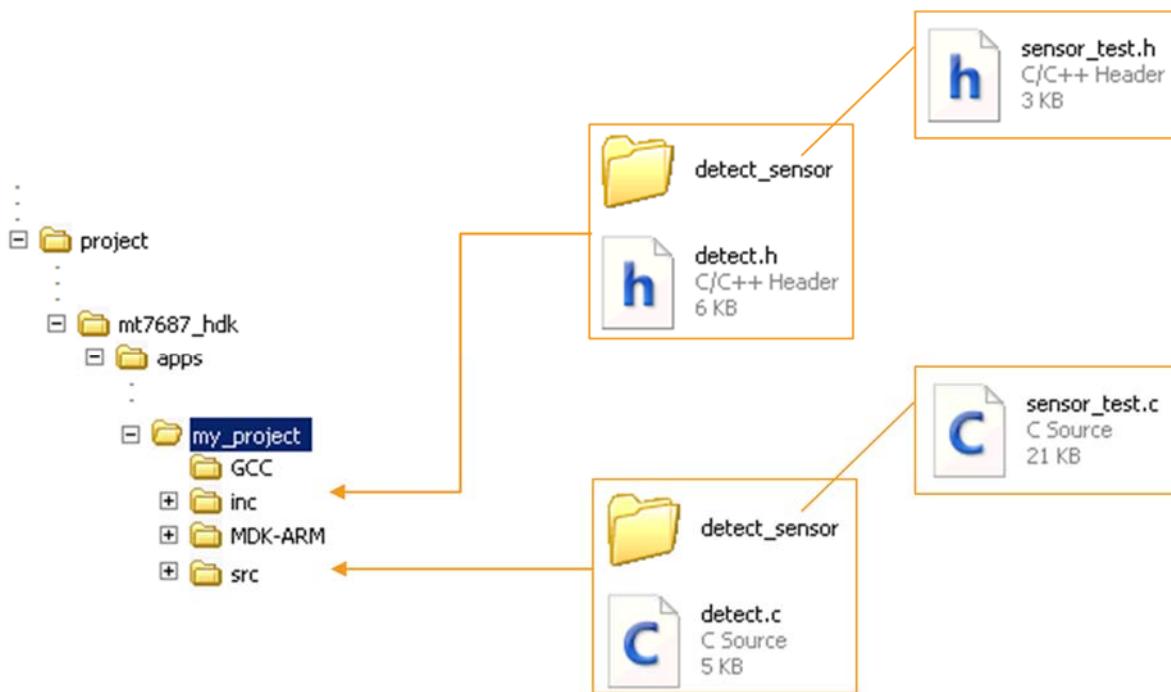

**Figure 34. Project source and header files under the project folder**

To compile the added source code, simply add the .c source files to variable "C\_FILES" and the header search path to variable "CFLAGS" in the project Makefile, as shown below. The corresponding variables to support compiling the source files (.cpp) of the module are CXX\_FILES and CXXFLAGS).

<sdk\_root>/project/mt7687\_hd़/apps/my\_project/GCC/Makefile

```

...
C_FILES += $(APP_PATH_SRC)/main.c \
            $(APP_PATH)/GCC/syscalls.c \
            $(APP_PATH_SRC)/detect.c \
            $(APP_PATH_SRC)/detect_sensor/sensor_test.c

CXX_FILES +=
...
CFLAGS += -I$(SOURCE_DIR)/kernel/service/inc
CFLAGS += -I$(SOURCE_DIR)/$(APP_PATH)/inc/detect_sensor

CXXFLAGS +=
...

```

### 3. Getting Started Using Keil µVision IDE

---

This section provides a guide to getting started with the LinkIt SDK v4 with Keil [µVision IDE](#). It covers the following items:

- The supporting environments for development.
- Installing the Microsoft Windows version of Keil.
- Building the Keil project.
- Downloading and running the Keil project.
- Debugging configuration on Keil.
- Creating a new Keil project.

#### 3.1. Environment

The SDK supports [µVision IDE](#) to build the project on Microsoft Windows OS. The suggested version is version 5.15.

Configure the LinkIt 7687 development board as described in section 2.2.1, "Configuring the LinkIt 7687 HDK", and configure the LinkIt 2523 development board as described in section 2.3.1, "Configuring the LinkIt 2523 HDK".

#### 3.2. Installing the Microsoft Windows version of Keil

This section describes how to install the [µVision IDE](#) on PCs running Microsoft Windows.


##### 3.2.1. Installing the µVision IDE

The SDK is released as a package for [µVision IDE](#). If you've already installed one of the supported µVision versions, you can skip this step. If you don't have µVision installed:

- 1) Download the [µVision IDE](#).
- 2) Install the µVision IDE.

##### 3.2.2. Installing the Keil package for the SDK

Download the Keil package of the SDK from [here](#). Double click on the file and install the package by following the on-screen instructions, as shown in Figure 35.

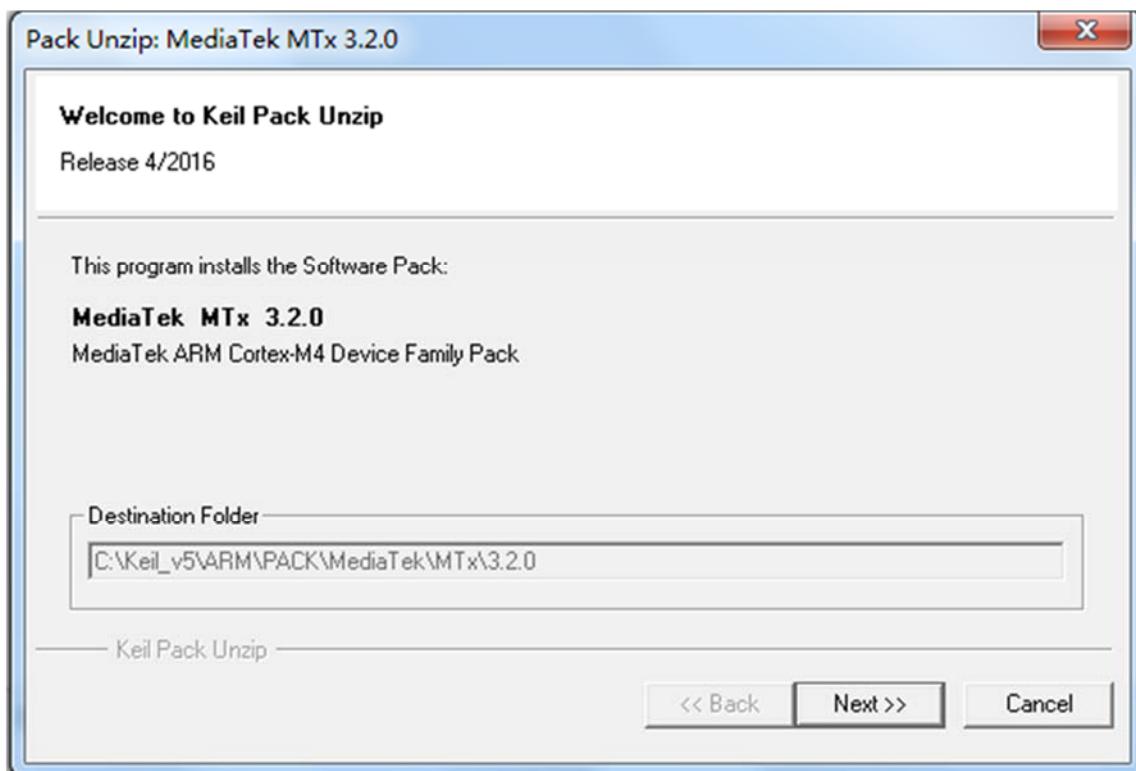


**Figure 35. Installing LinkIt SDK with Keil IDE**

The package directory can be browsed under **Destination Folder**, as shown in Figure 35 once the installation finishes.

### 3.3. Build the project


This section describes the required steps to build, download and run a project using the SDK with [μVision IDE](#). The example projects are preconfigured for LinkIt 7687 HDK and LinkIt 2523 HDK, the example below is based on LinkIt 7687 HDK.

- 1) Launch the [μVision IDE](#).
- 2) Import the preconfigured project.

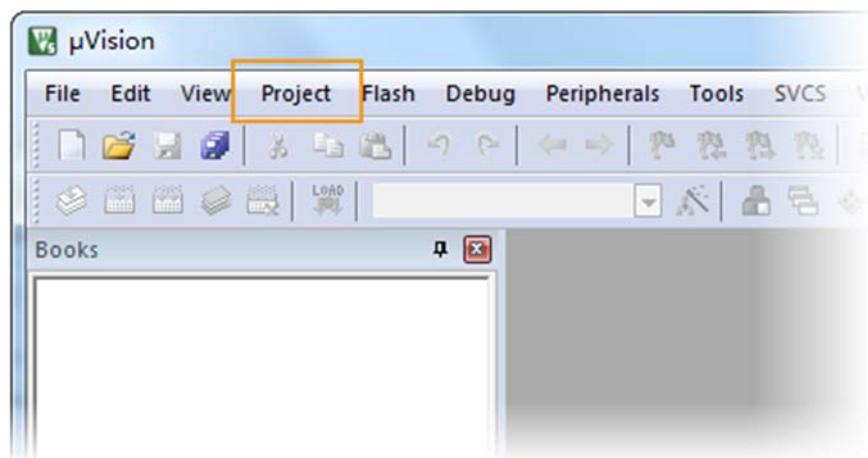


**Figure 36. Importing the preconfigured project**

- a) Navigate to **Project** (see Figure 36) in the µVision IDE's main menu, then **Open Project**. Click **Open** to import the project. The project file is named as <project>.uvprojx, such as the one shown in Figure 37.

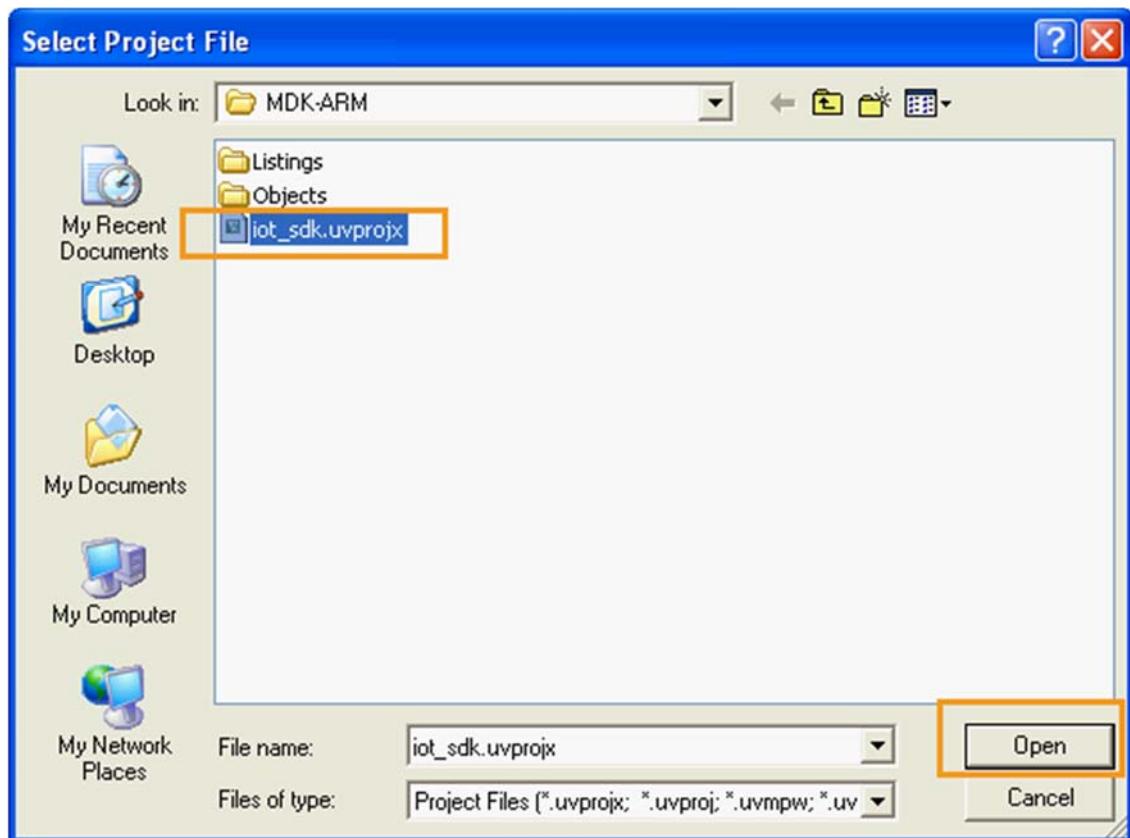


*Figure 37. Project file for Keil*

- 3) Click **Rebuild** to build the project, as shown in Figure 38.

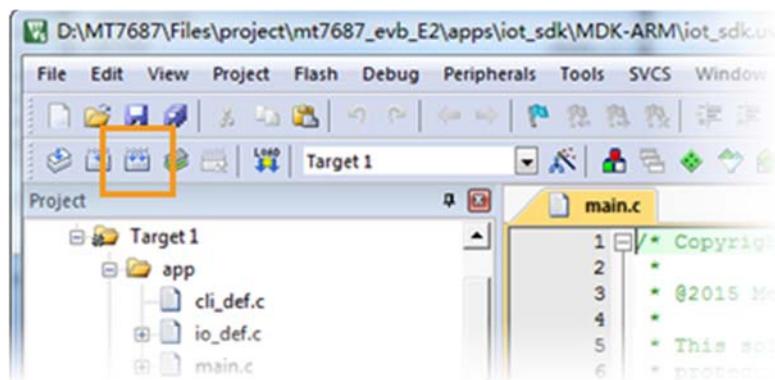

*Figure 38. Building the project*

- 4) The **Build Output** window is updated with the result, as shown in Figure 39.

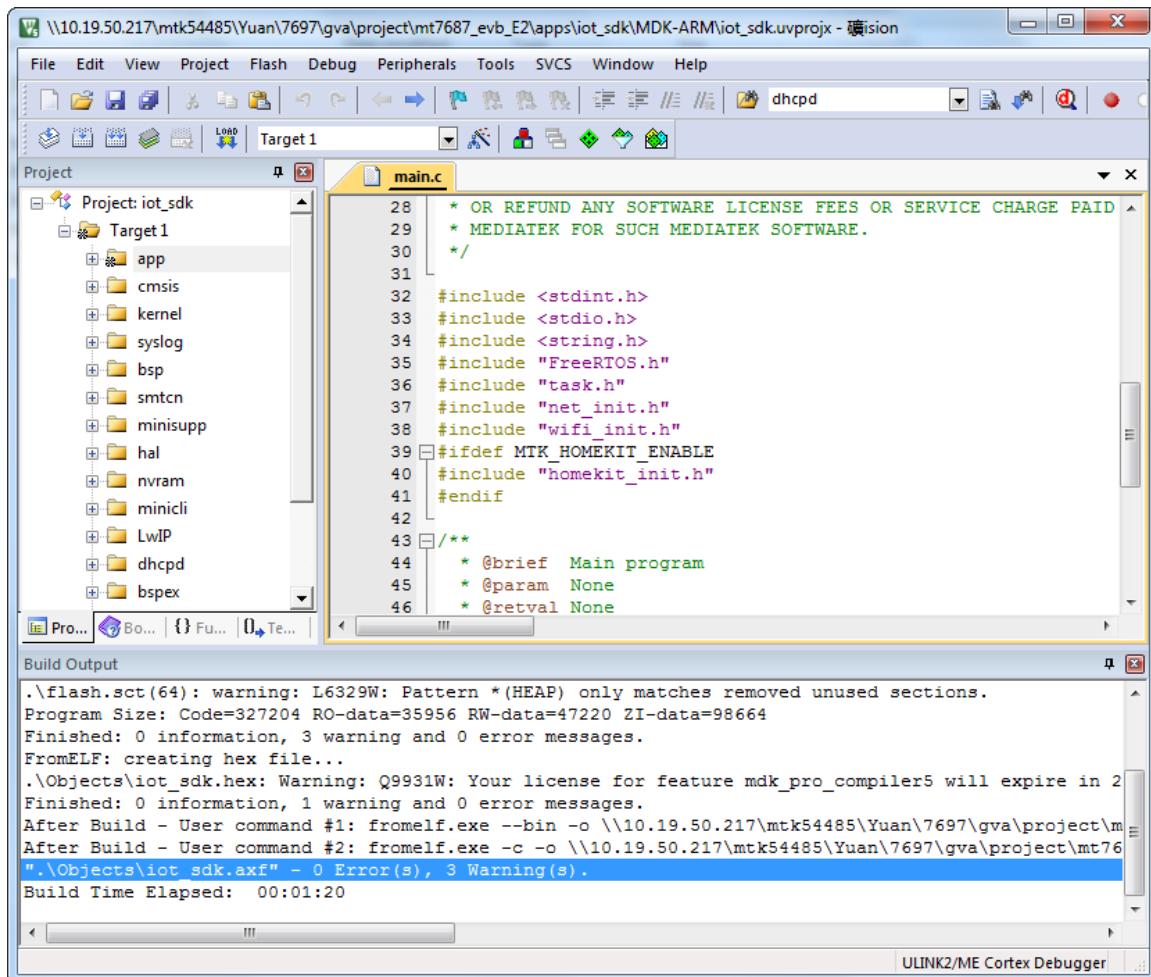**Figure 39. Project build result**

- 5) The output binary `iot_sdk_demo.axf` is generated under project directory `<sdk_root>\out_keil\mt7687_hd़\iot_sdk_demo\iot_sdk_demo.axf`.

## 3.4. Download and run the project

This section describes how to download and run the project using the Keil μVision IDE on LinkIt development platform for RTOS including LinkIt 7687HDK and LinkIt 2523 HDK. The example below is based on LinkIt 7687 HDK. The project is then built using the Keil μVision IDE.


There are three methods to download the project binary that is already built as described in Building Environment Developer's Guide.

- 1) Download the project binary using the Keil μVision IDE.
- 2) Download the project binary using MT76x7 Flash Tool. The MT2523 Flash Tool doesn't support to download multiple binaries.
- 3) Download the project binary using the LinkIt 7687 HDK as a removable storage.

### 3.4.1. Downloading the project binary using the Keil μVision IDE


This method uses the μVision IDE integrated with CMSIS-DAP debugger.

- 1) Set the **FLASH MODE (J25)** jumper to **FLASH Recovery** mode.
- 2) Connect a micro-USB cable to power on the Linkit 7687 HDK.
- 3) Click **Options for Target** or navigate to **Project**, then **Options for ...** and select **Target** on the main menu of the IDE (see Figure 40).

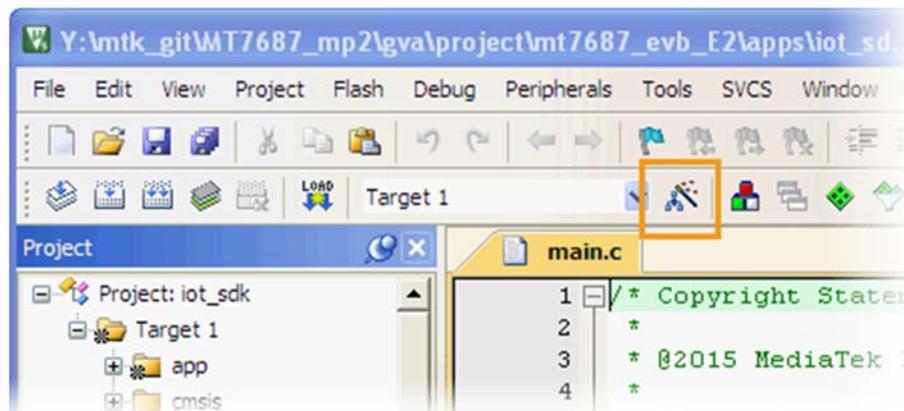


*Figure 40. Set download configuration on µVision IDE*

- 4) Select **Utilities** tab, then browse for the **Init File**. Select the file and press **Open**. The configuration file for the SDK is named as flash.ini and located under <sdk\_root>\tools\keil\mt7687, as shown in Figure 41.

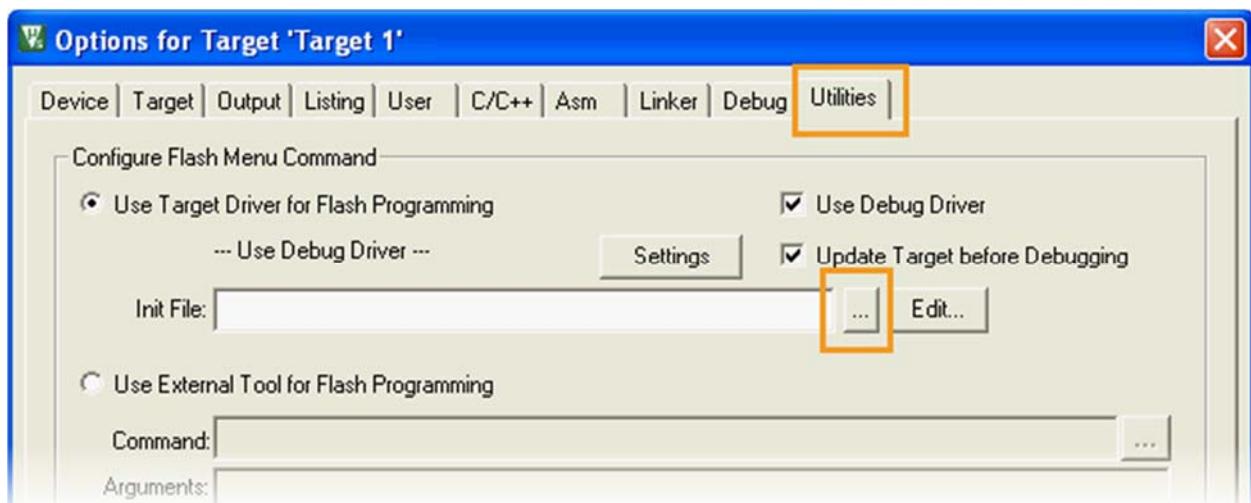


*Figure 41. Select configuration file*

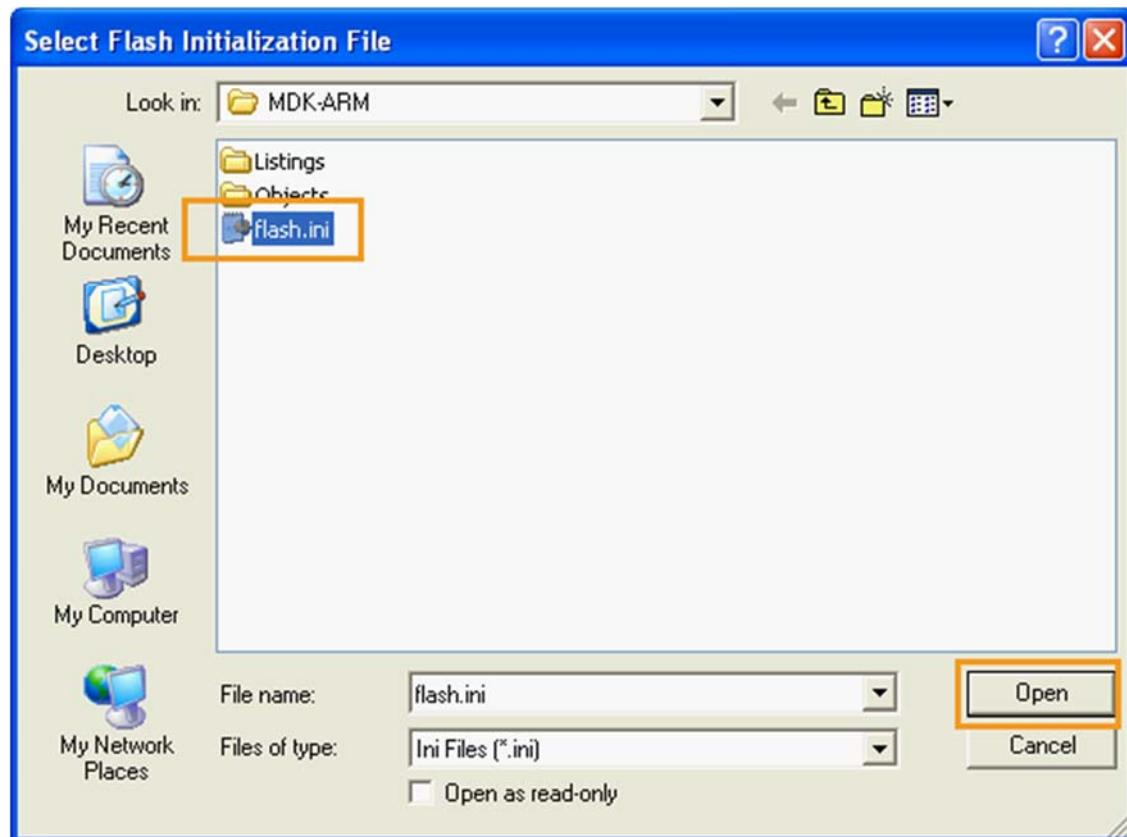


*Figure 42. Select flash initialization file (flash.ini)*

- 5) Navigate to the **Debug** tab to select the debug interface. The HDK supports the CMSIS-DAP interface, so here you can select **CMSIS-DAP Debugger** (see Figure 43).

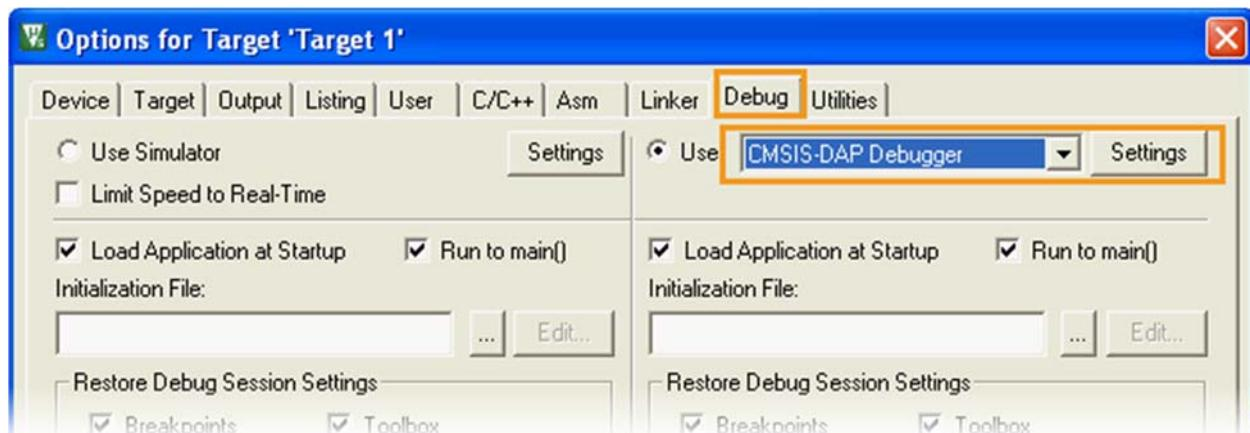


*Figure 43. Select the CMSIS-DAP Debugger interface*

- 6) Click **Settings** to switch to **Cortex-M Target Driver Setup** and select **Flash Download** to add device flash programming algorithm (see Figure 44).

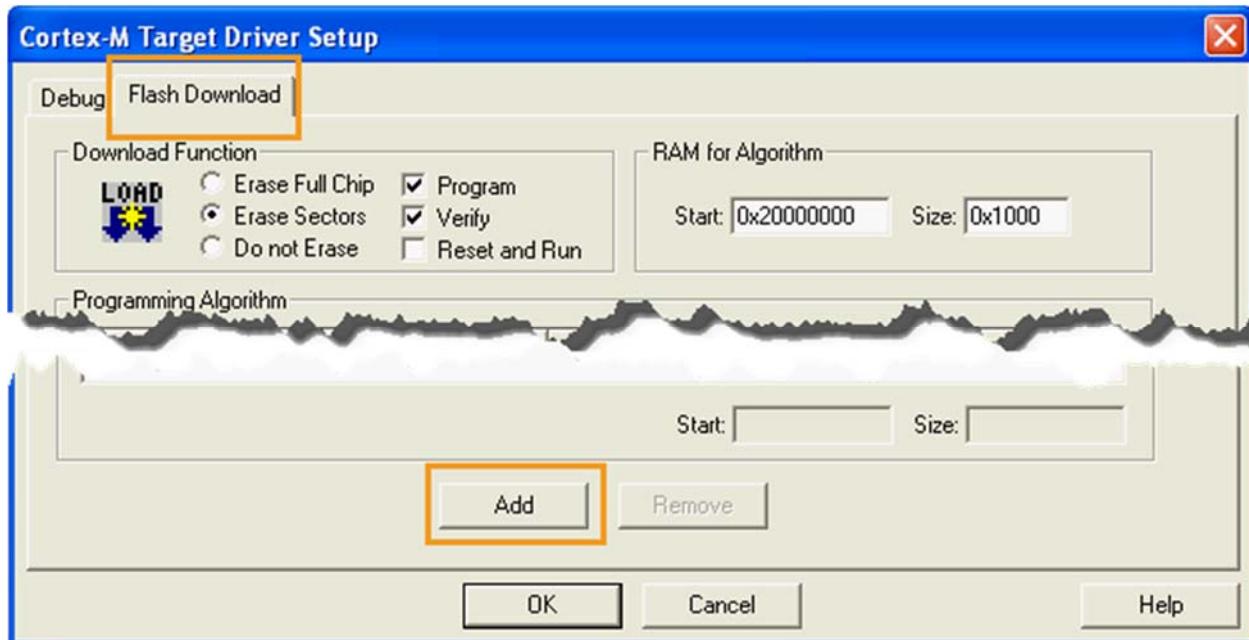


*Figure 44. Select device flash programming algorithm*

- 7) Click **Add** to switch to **Add Flash Programming Algorithm**, then select the **7687 32Mbits SIP Flash** and click **Add** (see Figure 45).

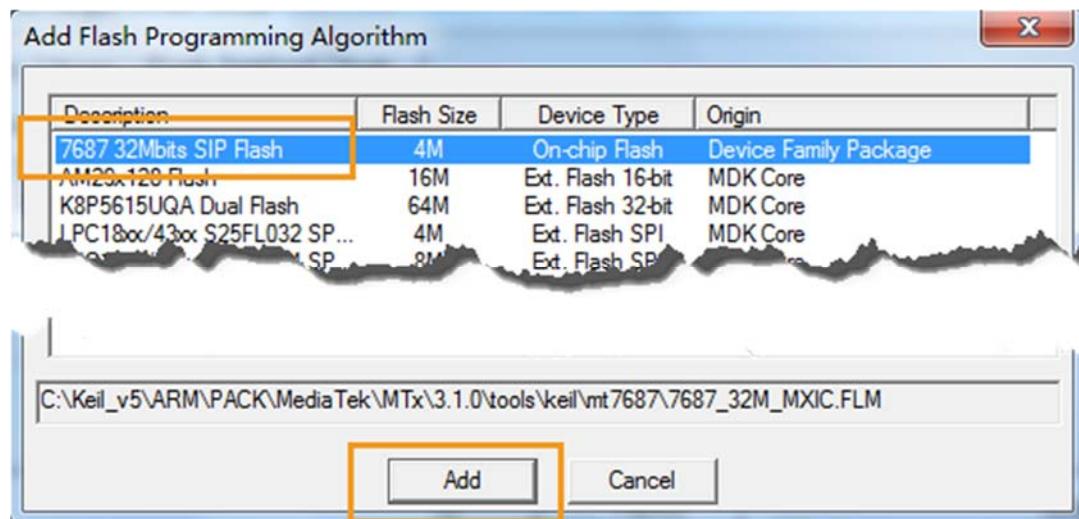


*Figure 45. Add device flash programming algorithm*

- 8) If downloading on LinkIt 2523 HDK, switch to **Debug**, and set **AP** as **0x03** then click **OK** (see Figure 46). Skip this step, if downloading on the LinkIt 7687 HDK.

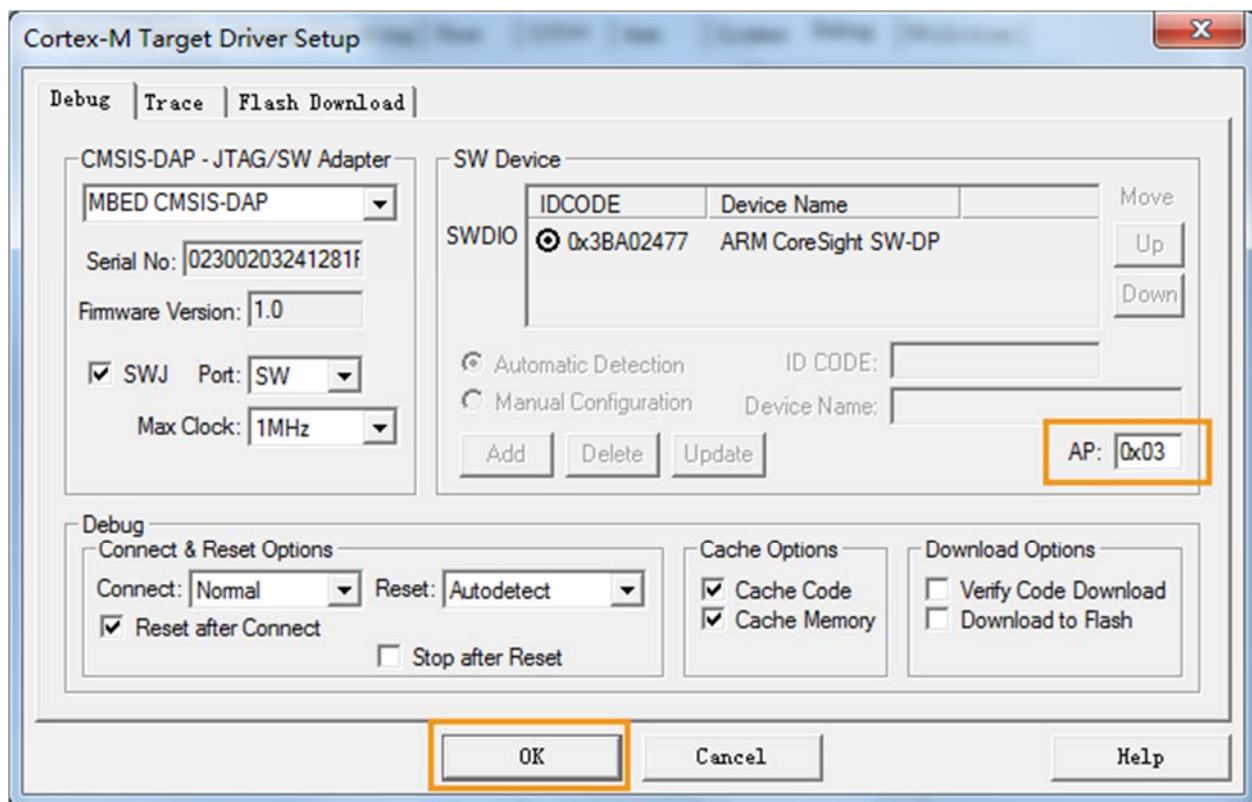

**Figure 46.** Setup the parameters for downloading the project on LinkIt 2523 HDK

- 9) Reset the board and then click **LOAD** to download the project binary to target (see Figure 47).

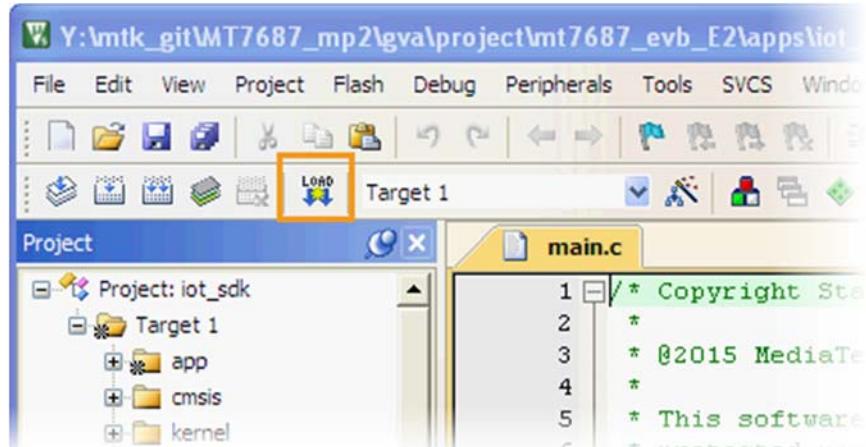


**Figure 47.** Download the project binary

### 3.4.2. Downloading the project binary using Flash Tool or using HDK as a removable storage device

Before you start to download the project binary, configure the settings and rebuild the project using Keil μVision IDE.

- 1) Click **Options for Target** or navigate to **Project**, then **Options for ...** and select **Target** on the main menu of μVision IDE, as shown in Figure 40.

- 2) Navigate to **User** tab, select **Run #1** and **Run # 2** under **After Build/Rebuild**, fill **fromelf.exe --bin -o \$L@L.bin #L**, and **fromelf.exe -c -o-\$L@L.dis #L** in **User Command** for **Run #1** and **Run # 2**, then select **Beep When Complete**, as shown in Figure 48.

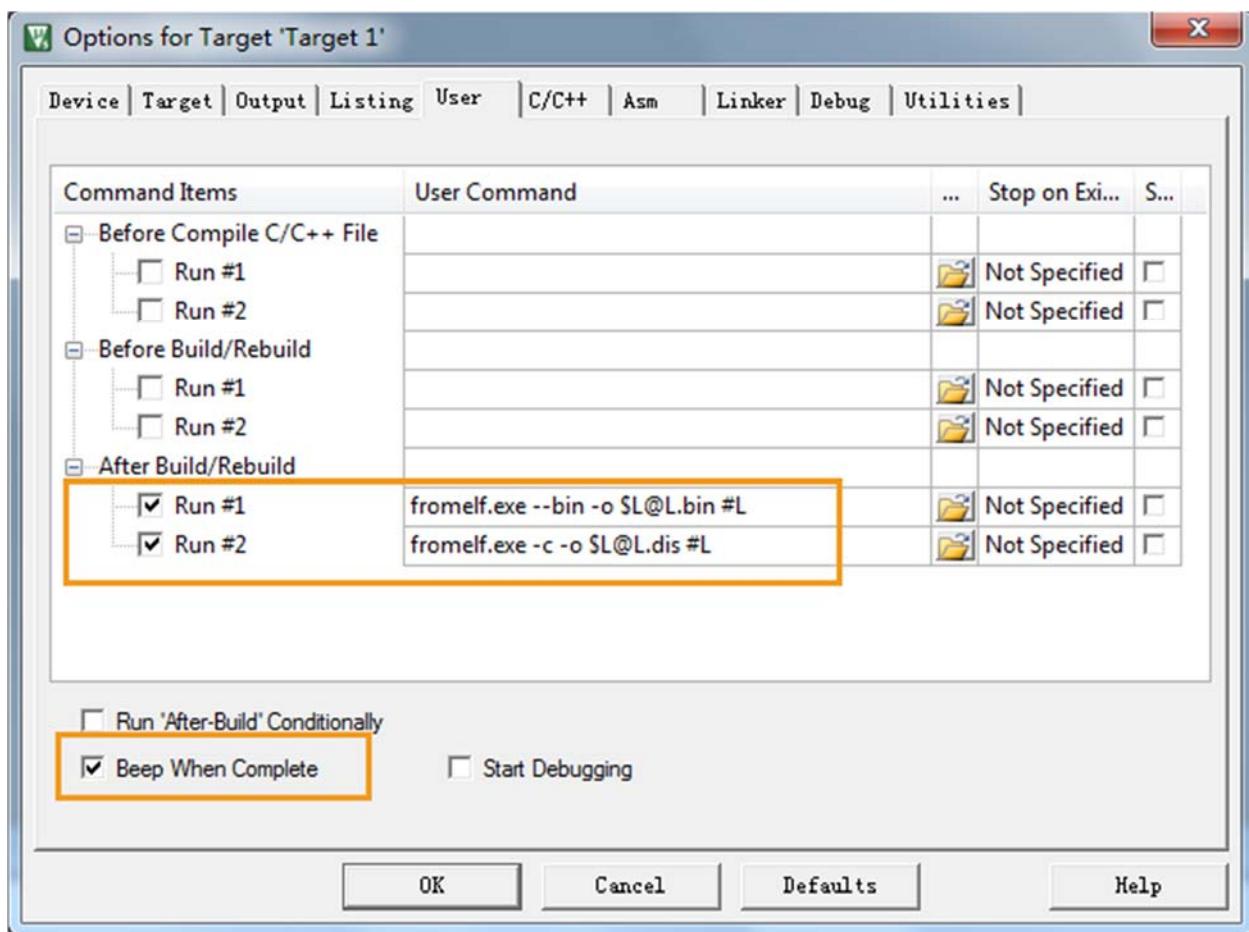

*Figure 48. User defined configurations*

- 3) Click **Rebuild** to build the project, as shown in Figure 38.
- 4) An output binary `mt7687_iot_sdk_demo.bin` will be generated in project directory `<sdk_root>\out_keil\mt7687_hdk\iot_sdk_demo\mt7687_iot_sdk_demo.bin`.

Download the project binary following the details in MT76x7 Flash Tool User's Guide or update the RTOS firmware through the removable storage based on the details in LinkIt 7687 HDK User's Guide.

### 3.4.3. Running the project

To run the project:

- 1) Disconnect the USB cable to power off the board.
- 2) Set **FLASH MODE (J25)** jumper to **FLASH Normal** mode.
- 3) Reconnect the USB cable or reset the board to power on the board.
- 4) Open **HyperTerminal** (the default: **HyperTerminal** on Windows OS) program, and configure it as described in section "Host UART Configuration" of MediaTek LinkIt™ Development Platform for RTOS System Log Developer's Guide, then observe the output log written from the project source files to ARM Cortex-M4 UART port. The following is a reference log example.

```

loader init [2016-04-28 15:03:10.924]
[2016-04-28 15:03:10.924]
fota: TMP is empty, skip upgrade[2016-04-28 15:03:10.939]
[2016-04-28 15:03:10.939]
jump to (0x1007c000) [2016-04-28 15:03:10.939]
total avail space = 13748
[2016-04-28 15:03:10.955]
nvdm init finished
[2016-04-28 15:03:10.955]
[T: 52 M: common C: INFO F: system_init L: 269]: FreeRTOS Running[2016-
04-28 15:03:10.970]

```

### 3.5. Debug configuration

Keil µVision IDE uses the CMSIS-DAP/mbed debugger supported on LinkIt 7687 HDK and LinkIt 2523 HDK to debug the project. Here are the debug configurations based on LinkIt 7687 HDK after the project is built and downloaded with the IDE.

- 1) Disconnect the micro-USB cable to power off the board.
- 2) Set the **FLASH MODE (J25)** jumper to **FLASH Normal** mode.
- 3) Reconnect the USB cable or reset the board to power on the board.
- 4) Launch the µVision IDE.
- 5) Click **Options for Target** or navigate to **Project**, then **Options for ...** and select **Target** on the main menu of, as shown in Figure 40.
- 6) Navigate to **Debug** tab in the **Options for Target** to select the **CMSIS-DAP Debugger**, as shown in Figure 49.

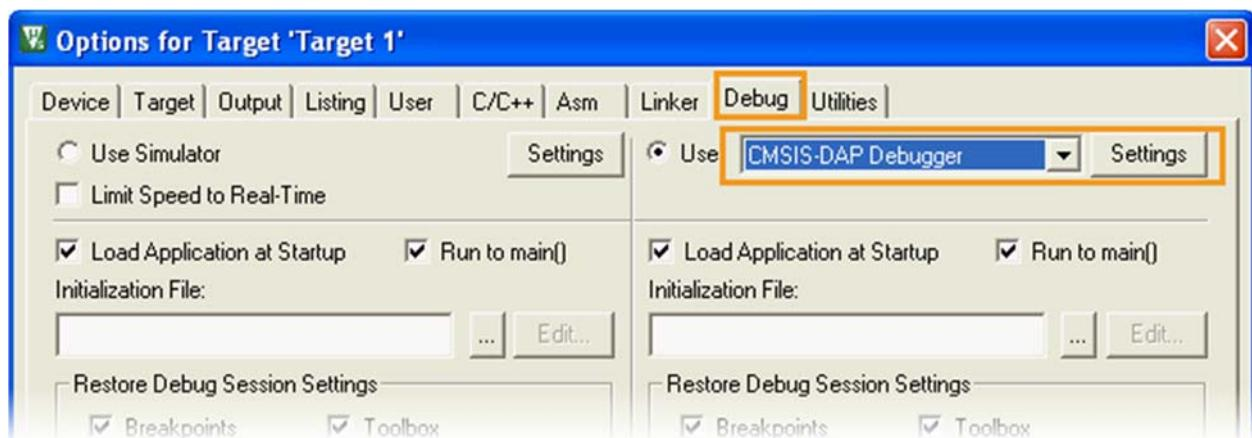


Figure 49. Configure the debug settings

- 7) Click **Settings** to switch to **Cortex-M Target Driver Setup**, then select **Debug** tab to set the configuration parameters and click **OK**, as shown in Figure 50.
  - **SWJ Port:** SW
  - **Max Clock:** 1MHz

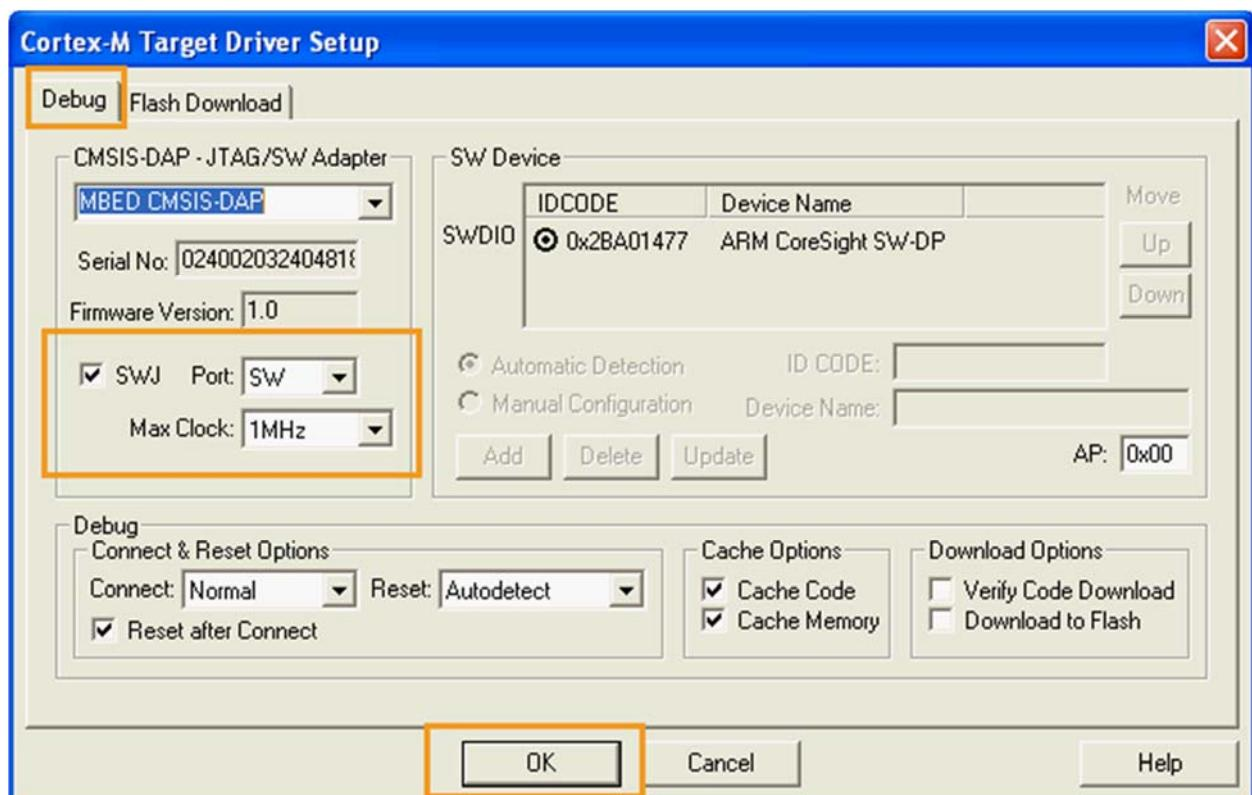


Figure 50. Setting the debug parameters on LinkIt 7687 HDK

- 8) If debugging on LinkIt 2523 HDK, set **AP** as 0x03, as shown in Figure 51.

- **AP:** 0x03

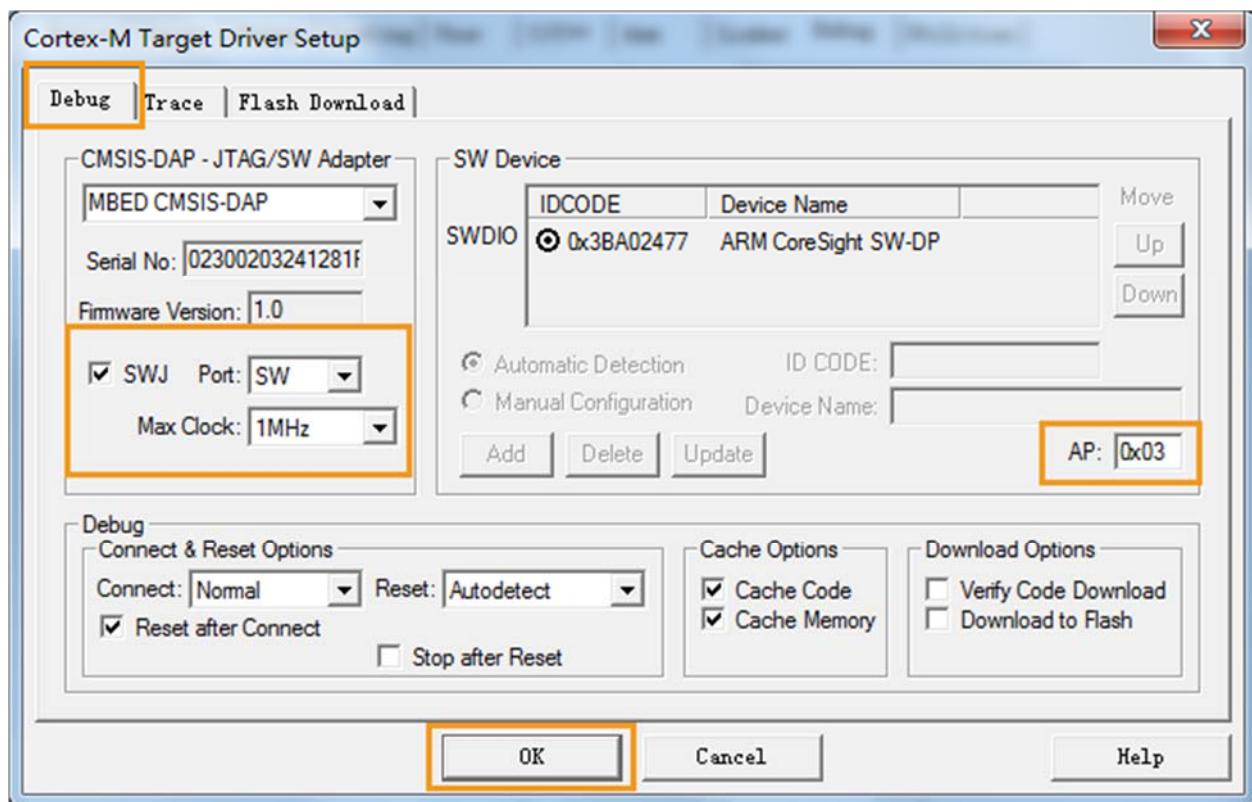


Figure 51. Setting the debug parameters on LinkIt 2523 HDK

- 9) Click **Debug** to start debugging the project, as shown in Figure 52.

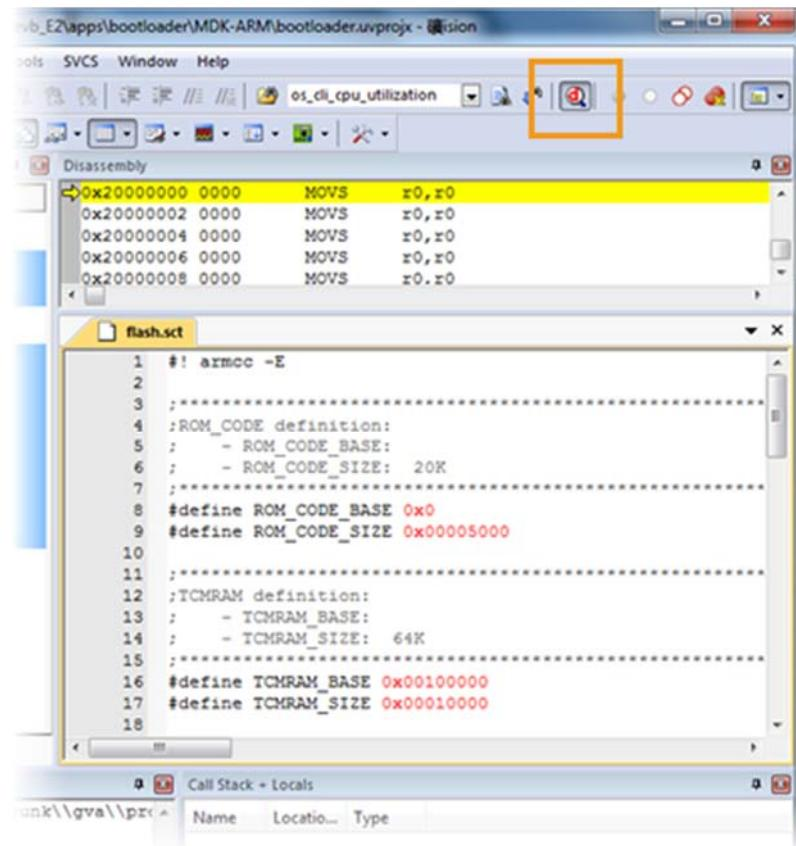


Figure 52. Debugging a project on Keil IDE

Note, Keil debugging is impossible in sleep mode. For more information, please refer to LinkIt for RTOS Power Mode Developers Guide under <sdk\_root>/doc.

## **4. Getting Started Using IAR**

---

This section provides a guide to getting started with the LinkIt SDK v4 with IAR embedded workbench. It covers the following items:

- The supported environments for development.
- Installing the Microsoft Windows version of IAR.
- Building the IAR project.
- Downloading and running the IAR project.
- Configuring the debug settings on IAR.
- Creating your own IAR project.

### **4.1. Environment**

The SDK supports IAR Embedded Workbench (suggested version is 7.50.1.10273) to build the project on Microsoft Window OS.

### **4.2. Supported features on LinkIt HDK**

Configure the LinkIt 7687 development board as described in section 2.2.1, “Configuring the LinkIt 7687 HDK”, and configure the LinkIt 2523 development board as described in section 2.3.1, “Configuring the LinkIt 2523 HDK”.

### **4.3. Installing the Microsoft Windows version of IAR**

If you've already installed one of the supported IAR versions, you can skip this step. If you don't have IAR installed:


- 1) Download the [iar-embedded-workbench](#).
- 2) Install the IAR Embedded Workbench.

### **4.4. Build the project**

The example projects are preconfigured for LinkIt 2523 HDK and LinkIt 7687 HDK, the example below is based on LinkIt 2523 HDK.


To build the project:

- 1) Launch the IAR Embedded Workbench IDE.
- 2) Import the pre-configured project.

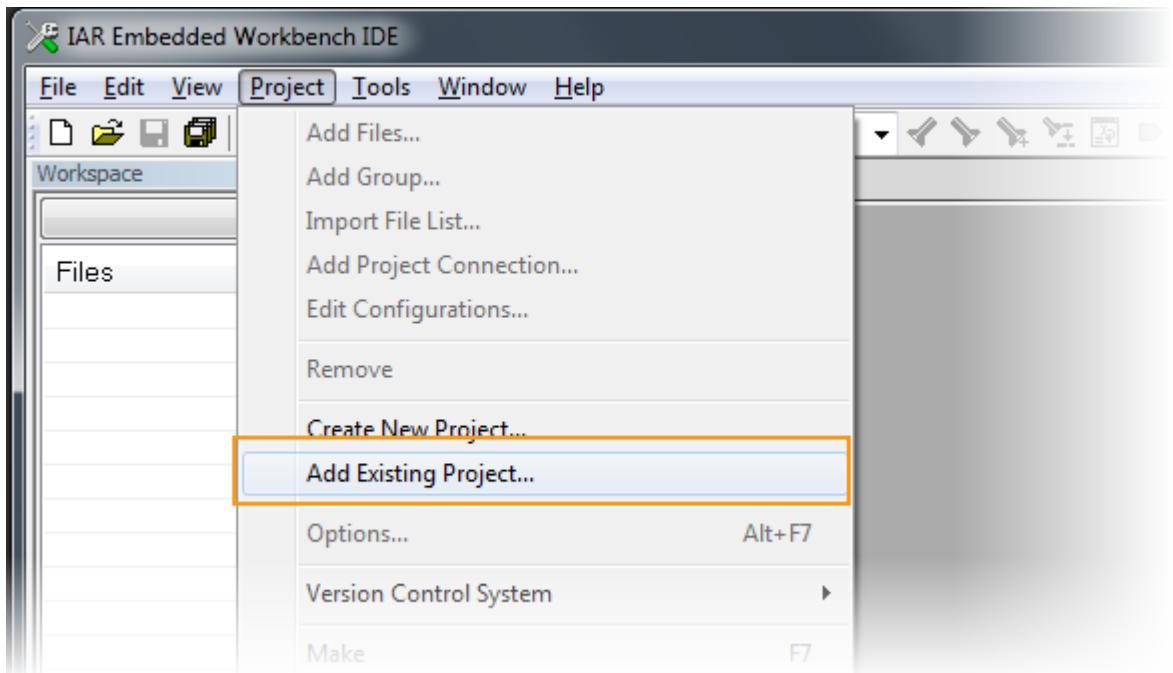


**Figure 53. Importing the preconfigured project**

- Navigate to **Project** (see Figure 53) in the IDE's main menu, then **Open Project**. Click **Open** to import the project. The project file is named as <project>.ewp, such as the one shown in Figure 54.

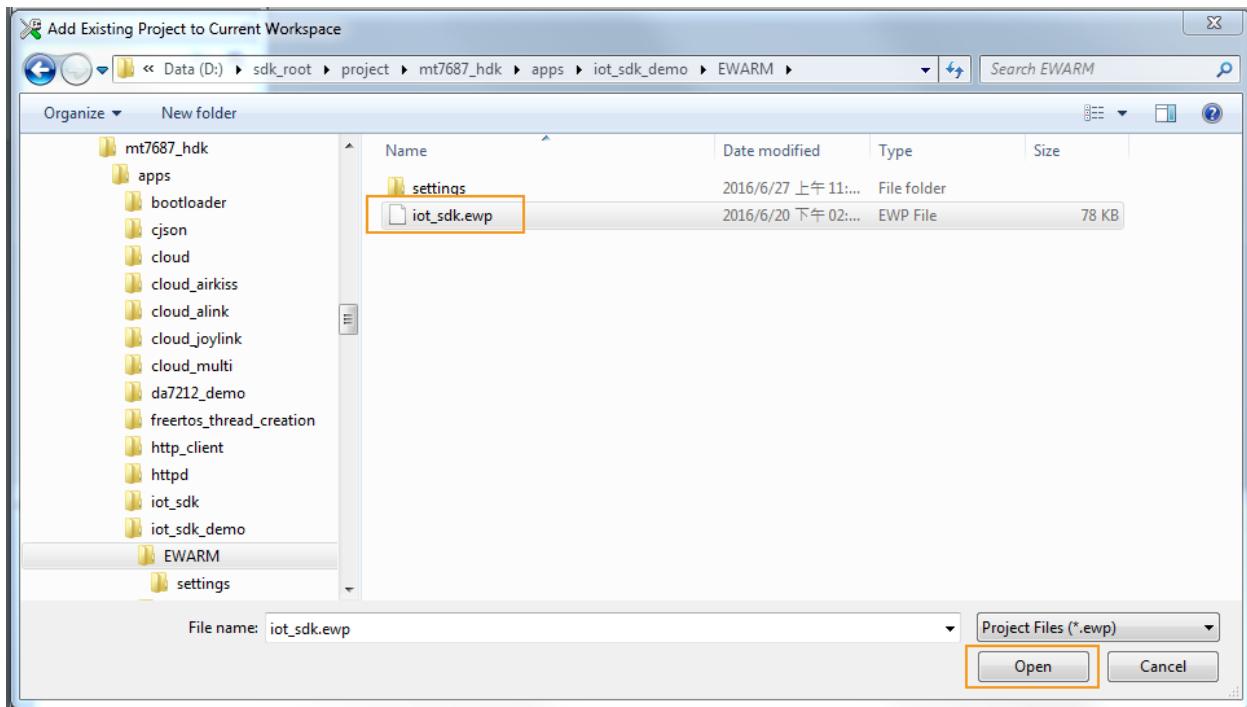


**Figure 54. Adding an existing project**

- Click **Rebuild** to build the project, as shown in Figure 55.

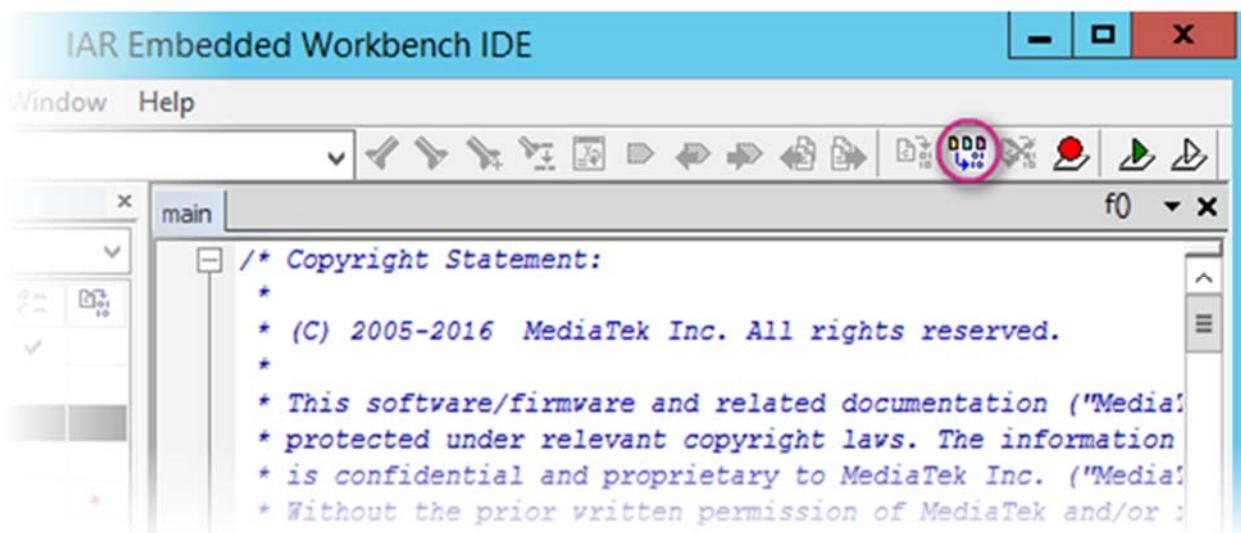

**Figure 55. Rebuild the project**

- 4) When the build operation is complete, the **Build output** window is updated with the result, as shown in Figure 56.

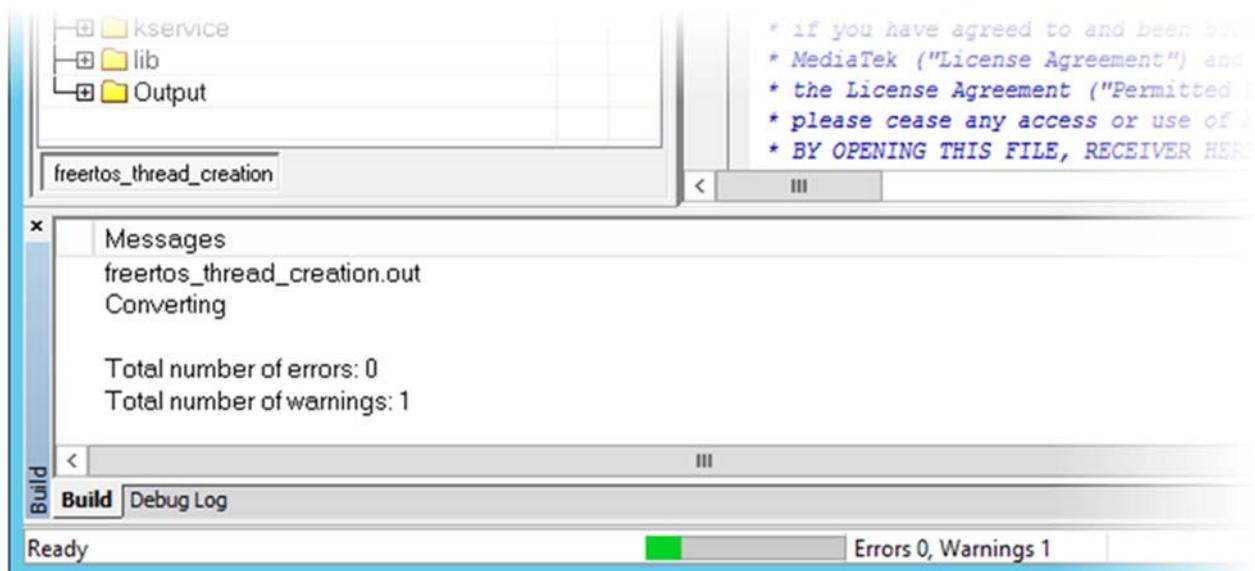

**Figure 56. Project build result on IAR Embedded Workbench IDE**

- 5) The output binary `freertos_thread_creation.out` is generated under project directory `<sdk_root>\out_iar\mt2523_hdk\freertos_thread_creation\freertos_thread_creation.out`.

## 4.5. Download and run the project

This section describes how to download and run the project using the IAR Embedded Workbench on LinkIt development platform for RTOS including LinkIt 2523 and LinkIt 7687. The example below is based on LinkIt 2523 HDK. The project is then built using the IAR Embedded Workbench.

### 4.5.1. Download the project

This method uses the IAR IDE integrated with CMSIS-DAP debugger.

To download the project:

- 1) Connect micro-USB connector to power on the LinkIt 2523 HDK.
- 2) Click **Options** on IAR Embedded Workbench (see Figure 57).

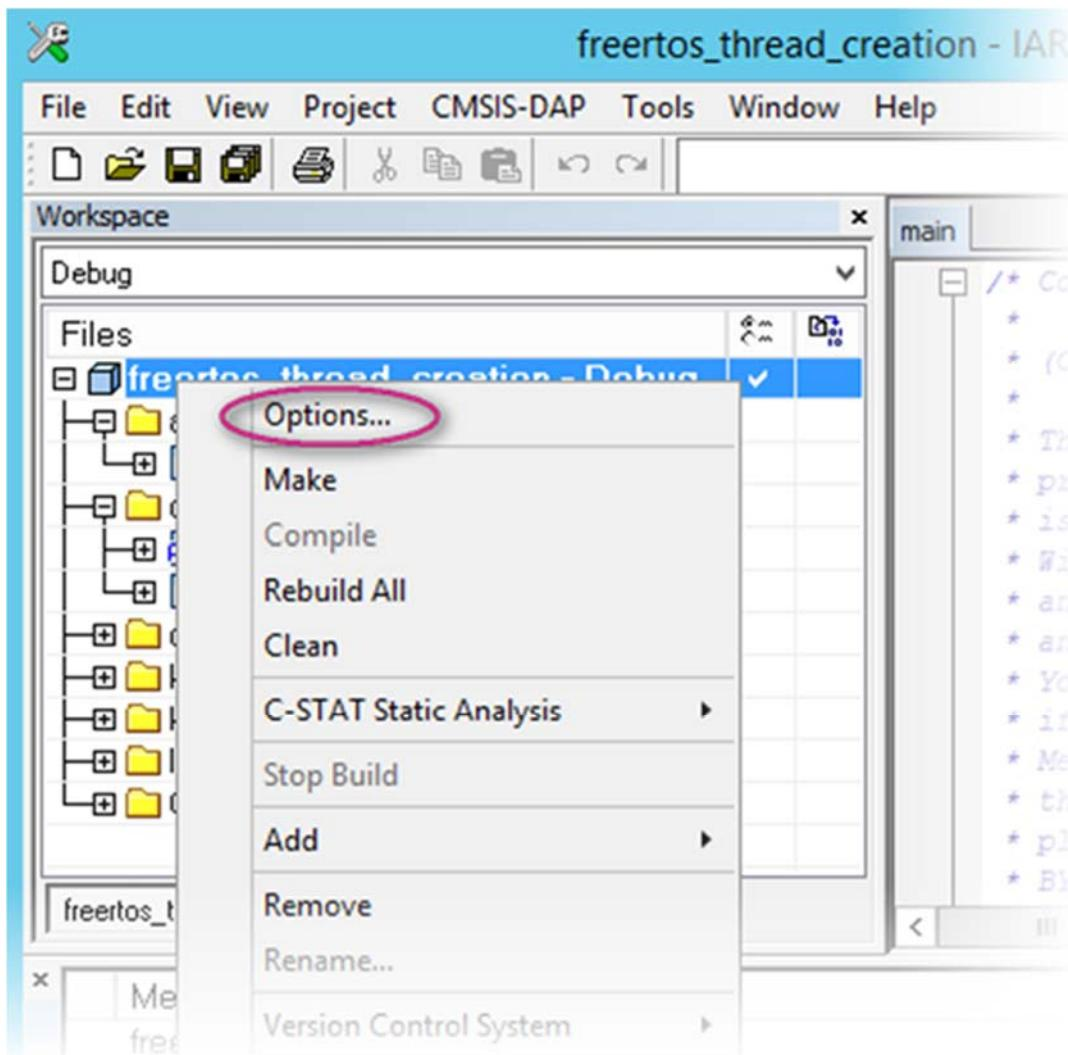


Figure 57. Set download configuration on IAR IDE

- 3) Choose **Debugger** item, then browse for the **Setup**.
  - a) Set **Driver** to **CMSIS-DAP** debugger (see Figure 58).
  - b) Set the **Device description file** to MT2523.ddf located under <sdk\_root>\tools\iar\mt2523, as shown in Figure 59.

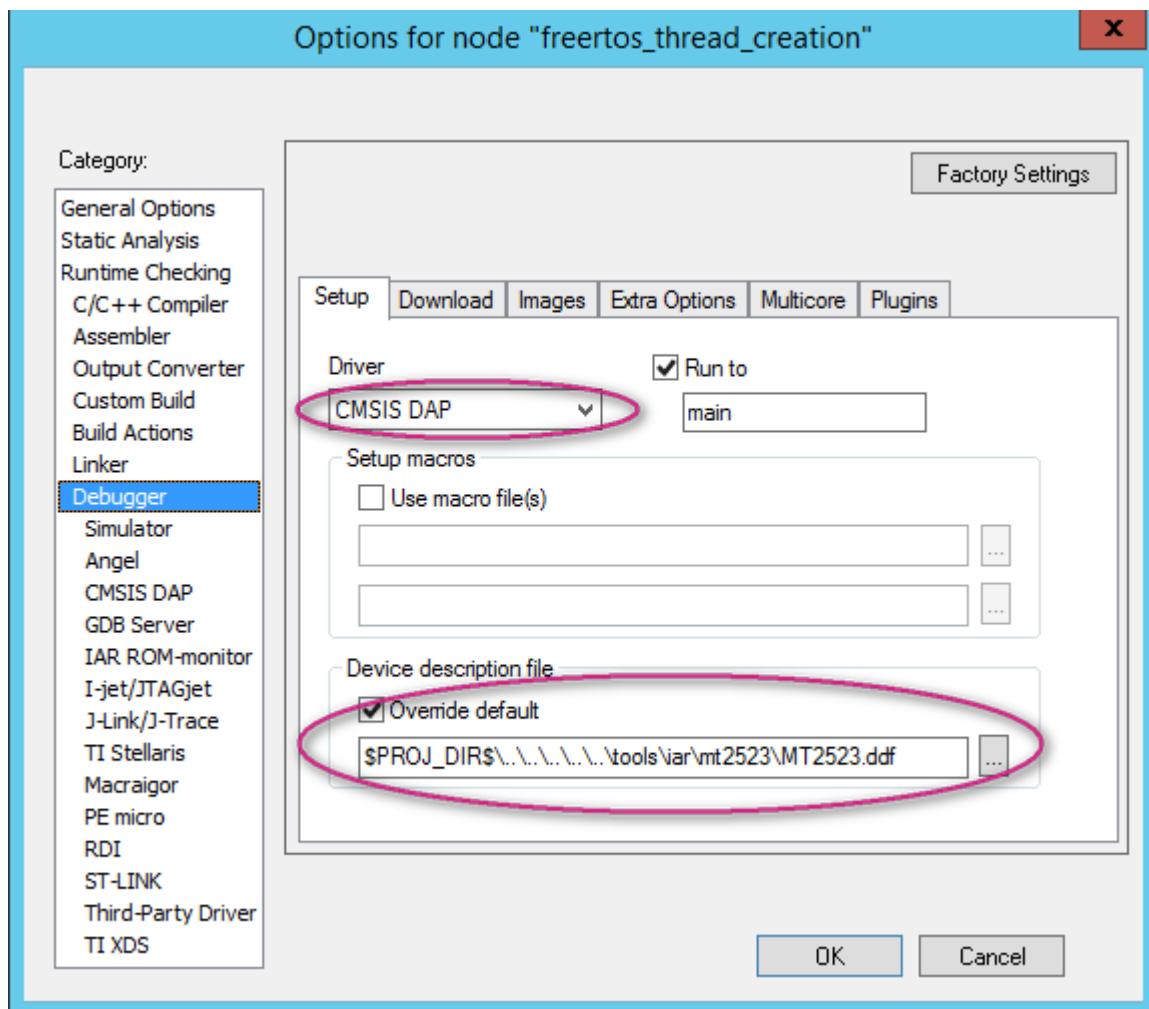


Figure 58. Select debug driver and ddf file



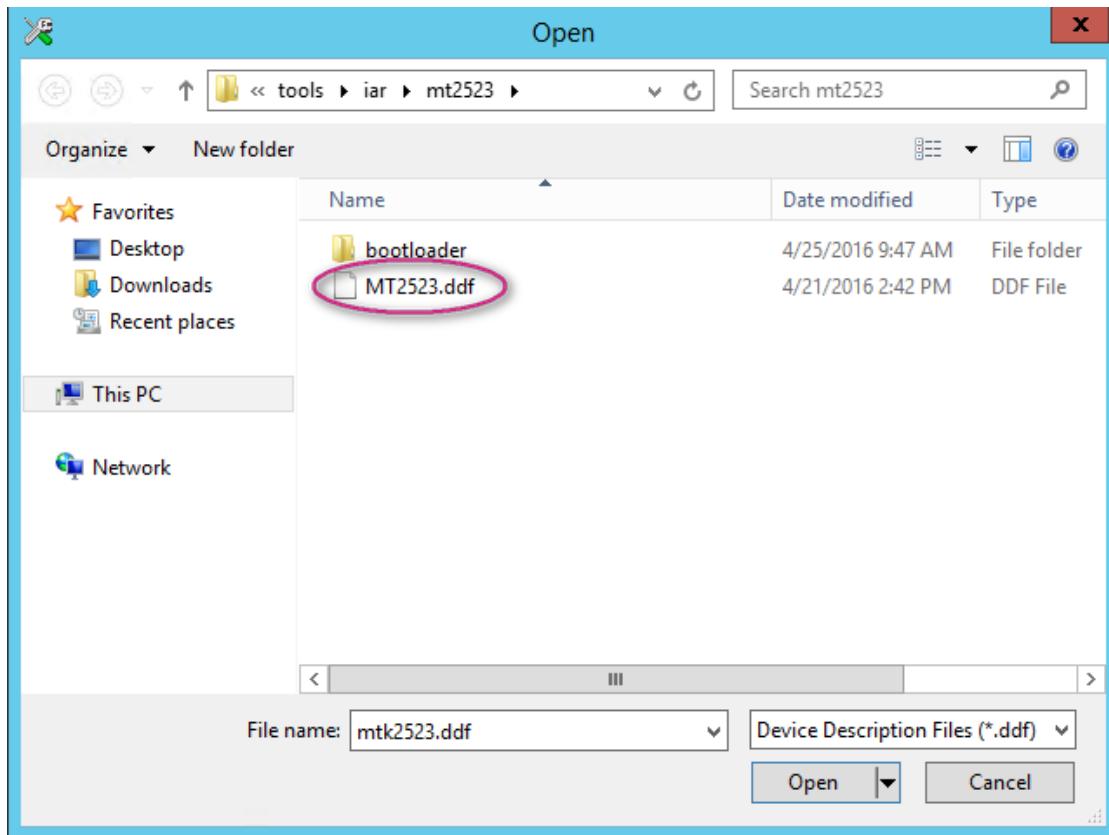


Figure 59. Open the MT2523.ddf file

- 4) Navigate to the **Download** tab and configure the settings as shown in Figure 60).
- a) The board file is located under <sdk\_root>\tools\iar\mt2523, as shown in Figure 61.

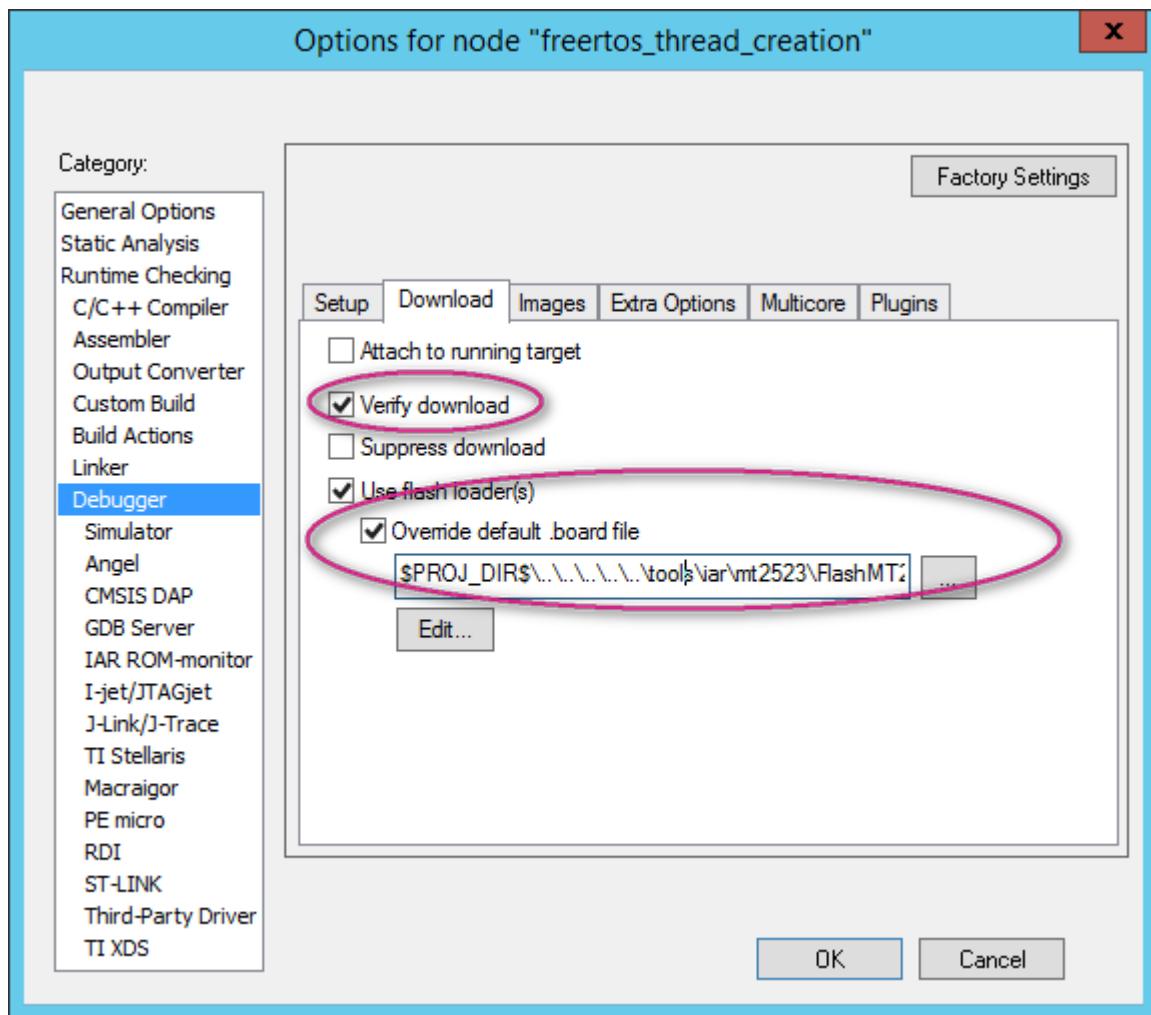

**Figure 60. Configure the download settings**

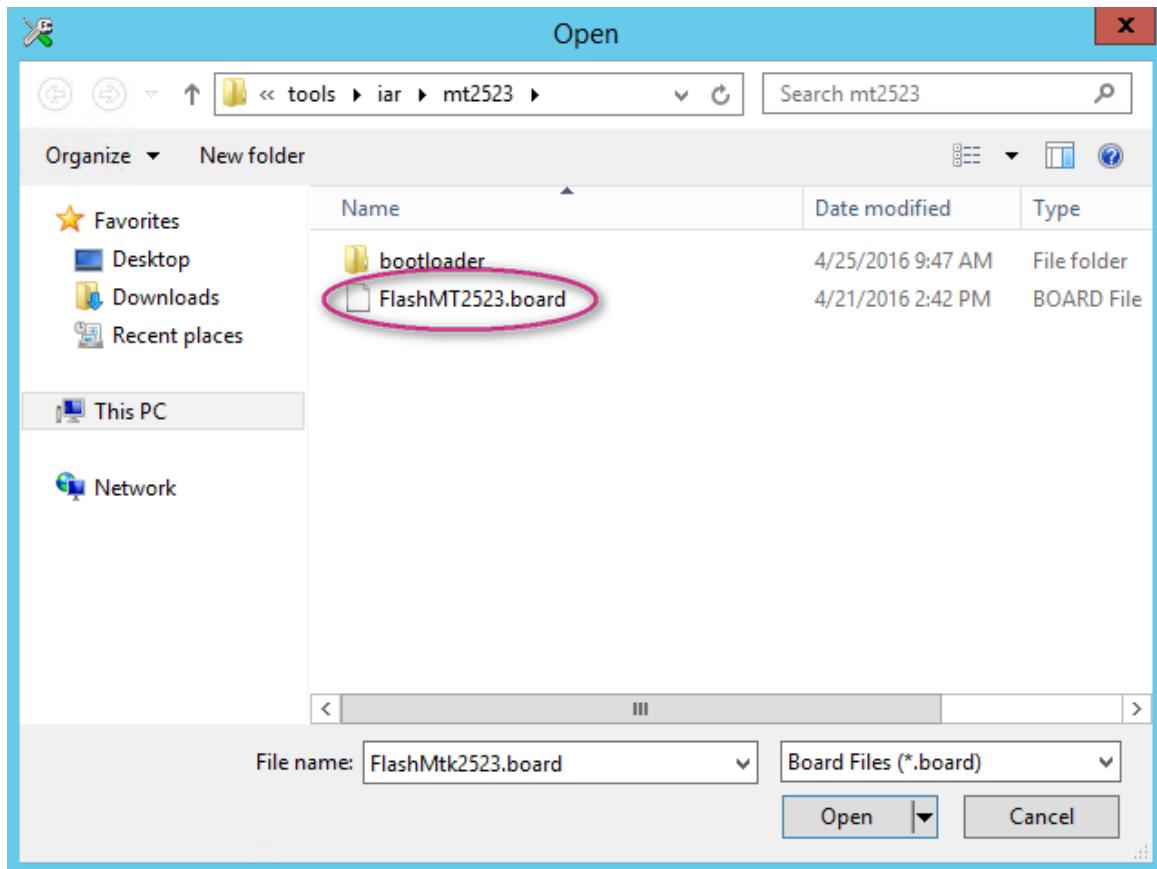

**Figure 61. Select the board file**

- 5) Choose Linker and Navigate to the input tab to modify setting as below, as shown in Figure 62.

  - **Keep symbols:** \_\_bootloader
  - **File:** \$PROJ\_DIR\$\..\..\..\..\..\..\tools\iar\mt2523\bootloader\bootloader.bin
  - **Symbol:** \_\_bootloader
  - **Section:** .bootloader
  - **Align:** 8

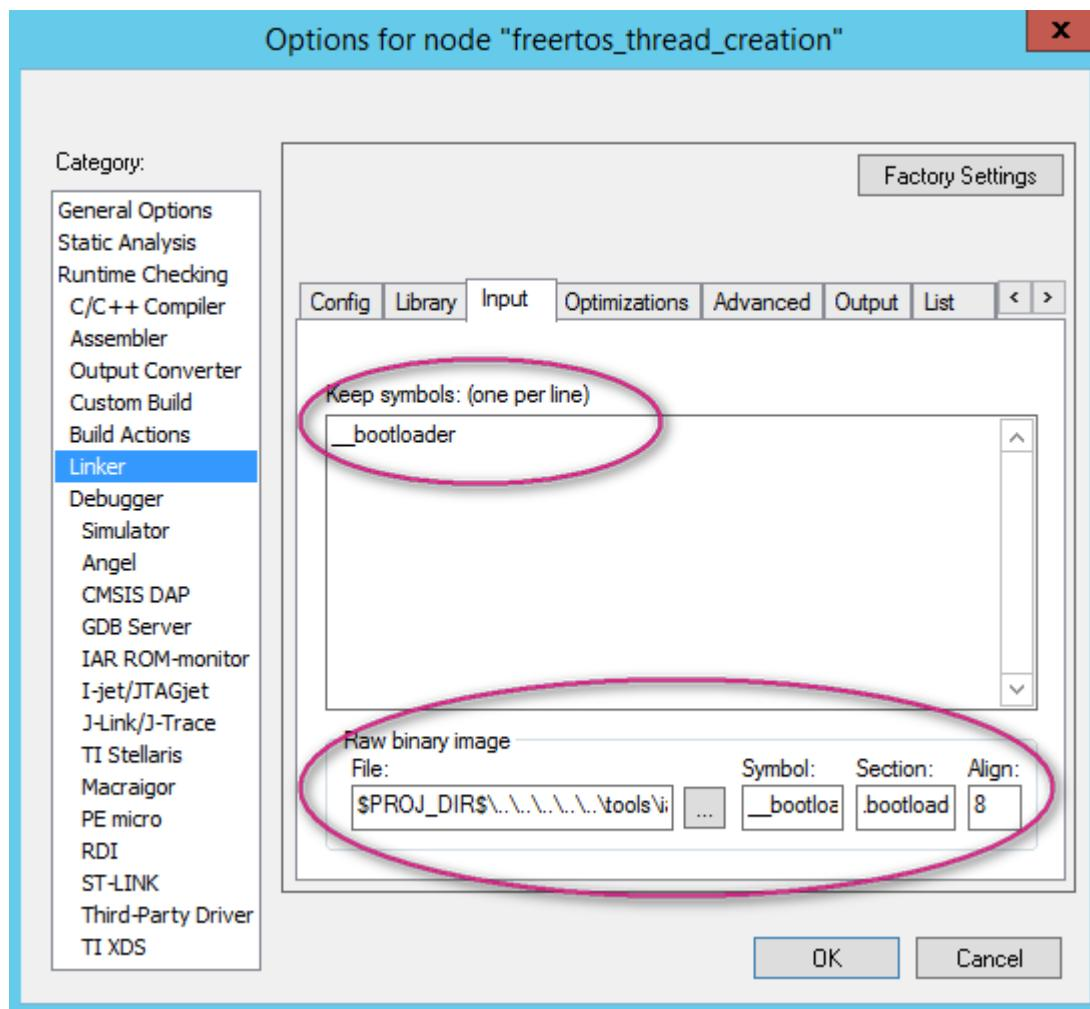


Figure 62. Set extra download Image

Next, configure the **CMSIS-DAP** settings under **Category** and then:

- 1) Navigate to **JTAG/SWD** tab and provide the interface (see Figure 63).


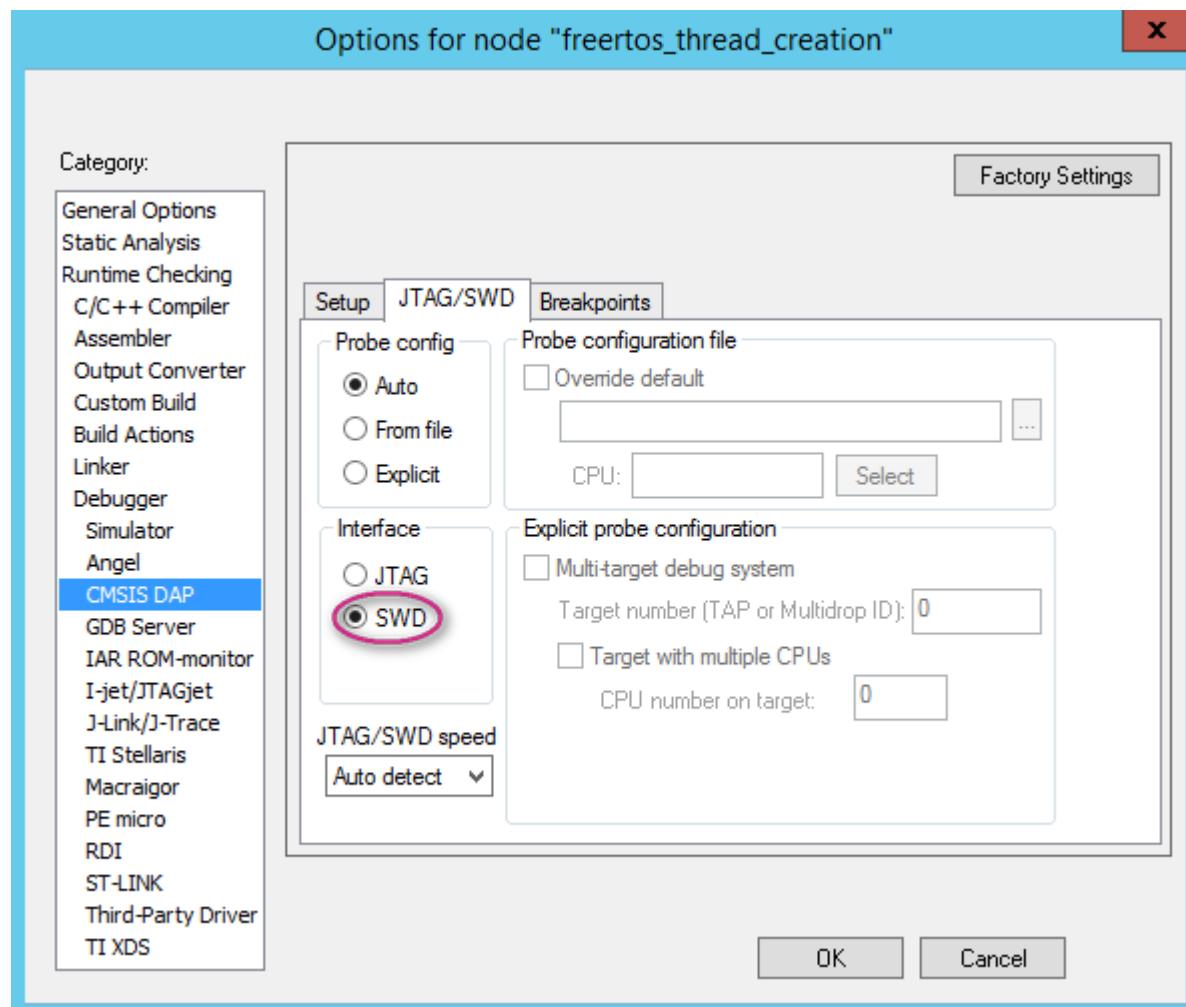


Figure 63. JTAG/SWD settings

- 2) Reset the board and then navigate to **Project**, then **Download** and click **Download file...** to download the project binary to target (see Figure 64).

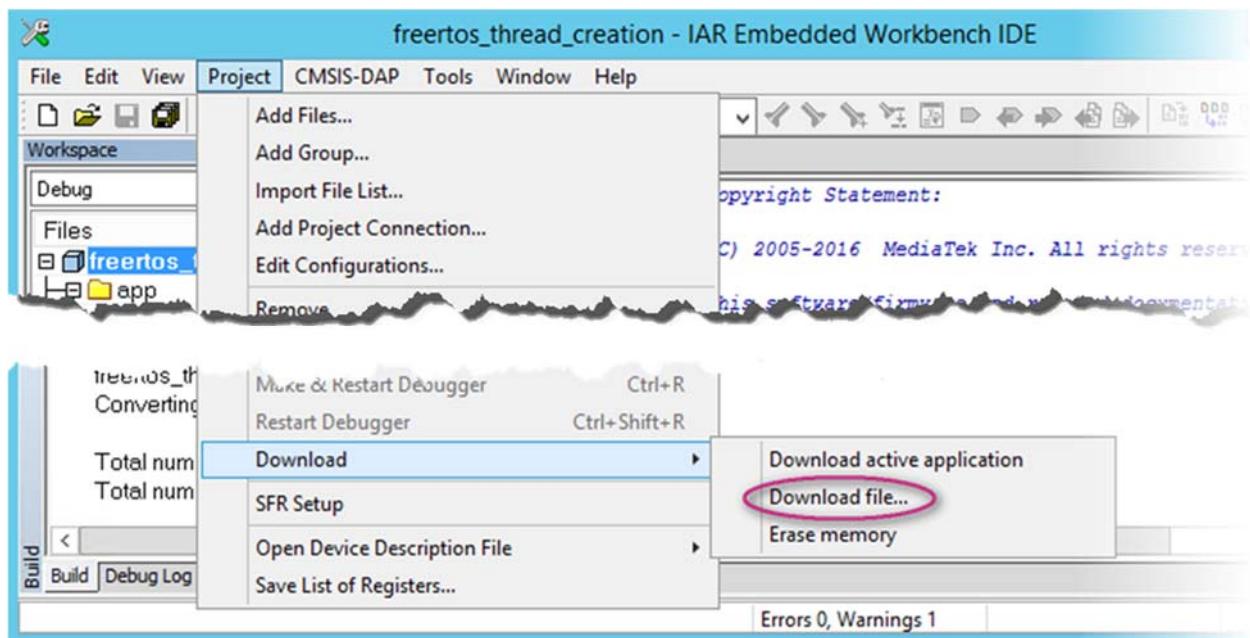

**Figure 64. Download the project binary**

Note, if you're using the LinkIt 7687 HDK, make sure the board is switched to **Flash Recovery** mode by setting jumper **J25** before resetting the board (see Figure 4). Set the LinkIt 7687 HDK back to **Flash Normal** mode after downloading the binary file to run the project.

#### 4.5.2. Running the project

To run the project:

- 1) Remove the USB cable to power off the board.
- 2) Reconnect the USB cable or press the reset button to power on the board.
- 3) Open **HyperTerminal** (the default: **HyperTerminal** in Windows operation system) program, and configure it as in section "Host UART Configuration" of the MediaTek LinkIt™ Development Platform for RTOS System Log Developer's Guide, then watch the output log written from the project source files to ARM Cortex-M4 UART port. The following is a reference log example.

```
loader init [2016-04-28 15:03:10.924]
[2016-04-28 15:03:10.924]
fota: TMP is empty, skip upgrade[2016-04-28 15:03:10.939]
[2016-04-28 15:03:10.939]
jump to (0x1007c000) [2016-04-28 15:03:10.939]
total avail space = 13748
[2016-04-28 15:03:10.955]
nvdm init finished
[2016-04-28 15:03:10.955]
[T: 52 M: common C: INFO F: system_init L: 269]: FreeRTOS Running[2016-04-28
15:03:10.970]
```

## 4.6. Debug configuration

The IAR Embedded Workbench IDE uses the CMSIS-DAP/mbed debugger supported on LinkIt 7687 HDK and LinkIt 2523 HDK to debug the project. Here are the debug configurations based on LinkIt 2523 HDK after the project is built and downloaded with IAR Embedded Workbench.

- 1) Remove the USB cable to power off the board.
- 2) Reconnect the **2523 USB** port using a micro-USB cable, as shown in Figure 13 and reset the board to power it on.
- 3) Reconnect the **MK20 port** using a micro-USB cable, as shown in Figure 13 to connect the CMSIS DAP debug interface.
- 4) Open the IAR Embedded Workbench tool.
- 5) Navigate to **Project**, and click **Debug without Downloading**, as shown in Figure 65.

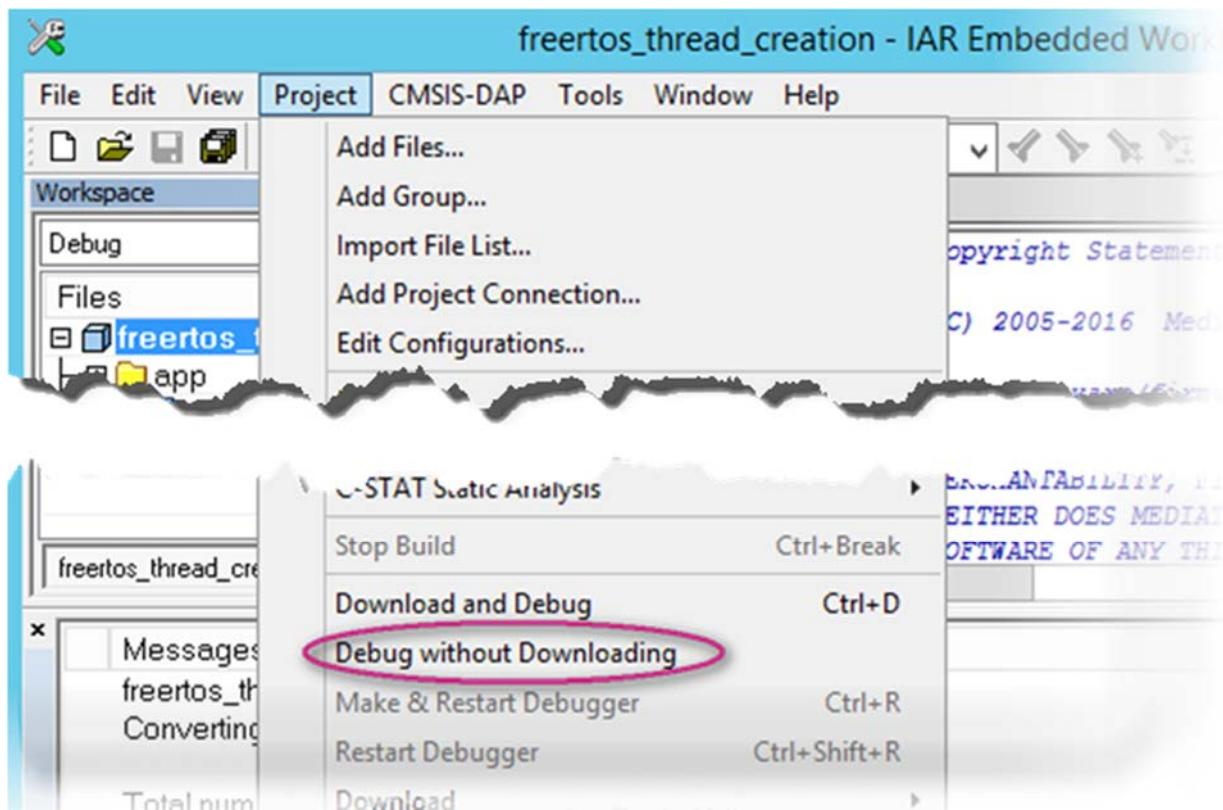


Figure 65. Debugging the project without downloading

- 6) Click **Debug** to start debugging, as shown in Figure 66.

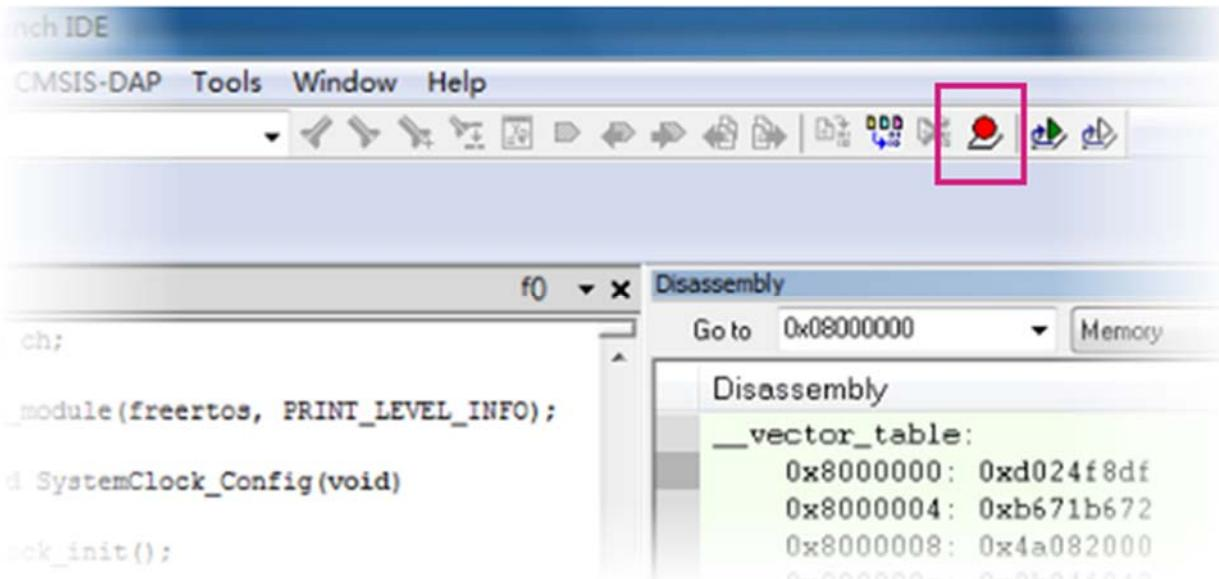


Figure 66. Debugging a project on IAR

 Note, IAR debugging is impossible in sleep mode. For more information, please refer to LinkIt for RTOS Power Mode Developers Guide under <sdk\_root>/doc.

## 5. Appendix A: Acronyms and Abbreviations

---

The acronyms and abbreviations used in this get started guide are listed in Table 14.

**Table 14. Acronyms and Abbreviations**

Abbreviation/Term	Expansion/Definition
ATCI	AT command interface (ATCI), usually AT commands are used to control modems to do their specified functions, they are also used to production line test.
ANSI	The American National Standards Institute
DBCS	A double-byte character set (DBCS) is a character encoding in which all characters (including control characters) are encoded in two bytes.
FOTA	Firmware over the air, a way to update firmware using wireless communication
GNSS	Global Navigation Satellite System
NEC	A kind of Infrared Transmission Protocol, The NEC IR transmission protocol uses pulse distance encoding of the message bits.
NVDM	Non-Volatile Data Management
OEM	Original Equipment Manufacturer (OEM) is a company that makes a part or subsystem that is used in another company's end product.
RC5	A type of infrared transmission protocol. The RC-5 protocol was developed by Philips in the late 1980s as a semi-proprietary consumer IR (infrared) remote control communication protocol for consumer electronics.
RC6	A type of infrared transmission protocol. RC-6 is, as may be expected, the successor of the RC-5 protocol. Like RC-5 the new RC-6 protocol was also defined by Philips. It is a very versatile and well-defined protocol.
TLS	Transport Layer Security (TLS) is cryptographic protocols that provide communications security over a computer network.
WEP	Wired Equivalent Privacy
WPS	Wi-Fi Protected Setup (WPS; originally Wi-Fi Simple Configuration) is a network security standard to create a secure wireless home network.