

PLASTERBOND

Bonding Agent for Plaster

ASTRAL

TRUBUILD™

TECHNICAL DATA SHEET VER NO. N.1

PRODUCT DESCRIPTIONS

TRUBUILD PLASTERBOND is a high-performance polymeric coating consisting of selected fillers and additives that provides an excellent bond on RCC with gypsum or any other plaster-based wall lining without the need for hacking.



FEATURES & ADVANTAGES




**EXCELLENT
BOND STRENGTH**



**SINGLE COAT
APPLICATION**


- Excellent cohesive bond to RCC, Concrete and other surfaces.
- Contains fine aggregates for better mechanical and chemical adhesion
- Application in one coat
- Green colour for easy identification

AREAS OF APPLICATION



- Brush application on RCC/ concrete
- For gypsum plastering or sand cement-based plastering

PACKAGING

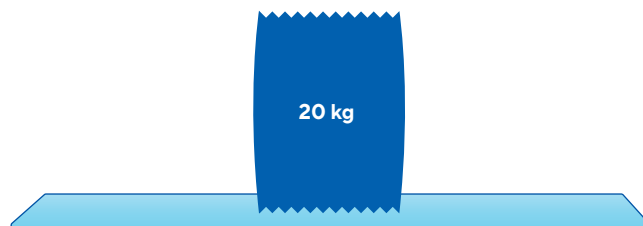

METHOD OF APPLICATION

Clean all types of dirt, oil, grease and loose material from the substrate. Bring surface to SSD condition for better coverage and performance of TRUBUILD PLASTERBOND. Mix the material well before use; after opening the container. Apply a single brush coat on the substrate. After 24 hours, surface will be ready for gypsum plaster or any sand cement based plastering.

Note: Do not apply on wet surface.

TECHNICAL DETAILS

S.NO.	PROPERTIES	STANDARD	RESULTS
1.	Physical State	-	Liquid
2.	Appearance	-	Opaque
3.	Colour	-	Green
4.	Setting time (HR)	In house	24 hours
5.	Bond strength (MPA)	In house	Up to 1 MPA

COVERAGE

- 40-50 sq.ft/kg/coat

Note: Single coat application only required. Don't Mix water it will reduce the efficiency of chemical. Coverage may vary due to undulation and porosity of substrate.

SHELF LIFE

Best before 6 months from the date of manufacturing

HANDLING & STORAGE

HANDLING: Mandatory and recommended industrial hygiene procedures should be followed whenever our products are being handled and used. For additional information please read Material safety data sheets.

STORAGE: Product should be stored in a dry place in their original, properly closed containers at temperature between 2 - 40°C. Chemical should be consumed once opened

DISCLAIMER: This technical data sheet replaces all previous versions of it from the immediate effect. The information, and, in particular, the recommendations relating to the application and end-use of Astral Ltd, construction chemical products, are given in good faith based on our knowledge and experience of the products when properly stored, handled and applied under suitable favourable conditions in accordance with application instructions recommended in product technical data sheet. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. For the products on which company is offering warranty, please refer to warranty document to know entire terms and conditions. The same can be availed on request or from company website. The values mentioned in the above tables in technical data sheet are obtained in controlled lab conditions when tested properly by competent laboratory. Tolerance up to five to ten percentage on the lower side from the above values are allowable. Astral Ltd. reserves the right to change the properties of its products without notice. The end user of the product must test the product's suitability for the intended application and purpose. Astral Ltd will not bear any responsibilities on the product failure if it is wrongly positioned or if improper application methodology is adopted by the user or the applicator. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local product technical data sheet for the product concerned, copies of which will be supplied on request. No freedom from any patent owned by Seller or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, customer is responsible for determining whether products and the information in this document are appropriate for the customer's use and for ensuring that the customer's workplace, and disposal practices are in compliance with applicable laws and other governmental enactments.