

TECHNICAL DATA SHEET VER NO. N.1

TRUBUILD TRUSHIELD is a high-quality, SBS-modified, self-adhesive, cold-applied sheet waterproofing membrane. It has a cross-laminated HDPE film on one side and a silicon release film on the other. It provides excellent waterproofing and high endurance, making it ideal for below-ground structures.

FEATURES & ADVANTAGES



EXCELLENT WATERPROOFING PROPERTIES

- Provide protection water and vapour
- Excellent resistance to chlorides, sulphate, alkalis and acids
- Just peel off the silicone film and stick to the surface with primer



GOOD TEAR AND PUNCTURE RESISTANCE




HIGH DURABILITY AND ENDURANCE

- Excellent tensile strength
- Cold applied - no heating required
- Excellent water resistance
- Can be applied on horizontal and vertical surfaces

AREAS OF APPLICATION



PACKAGING

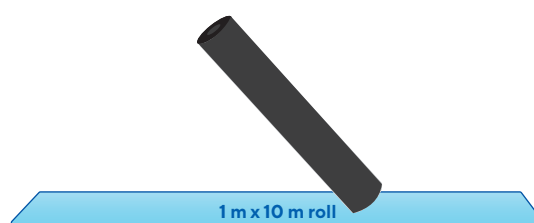

- Concrete waterproofing for below-ground structures, subways, retaining walls, etc.

METHOD OF APPLICATION

Surface Preparation

Ensure that surfaces are thoroughly cleaned of all contaminants such as dust, curing compounds, oil, and grease. All surface imperfections, protrusions, structurally unsound, and friable concrete must be removed and repaired. Fill surface irregularities such as blowholes, honeycombs, etc., with a suitable concrete repair mortar.

Priming

Apply Trubuild Trushield Primer @ 4–6 sq. m/litre using a brush or roller over the prepared substrate, as per the recommended coverage. Lay the membrane once the primer reaches a touch-dry state. Prime only an area that can be covered within the same working day.

Application

Unroll the membrane and align it according to proper markings across the area. Re-roll the membrane into its original form to maintain alignment.

Peel off the release film from the self-adhesive side and press the membrane onto the surface. Smoothen it from the center toward the edges using a wooden press to remove any entrapped air.

Use an iron roller over the applied membrane to ensure proper and strong adhesion of the bitumen compound with the base surface.

Ensure a minimum side overlap of 50 mm and an end overlap of 100 mm.

Protection

The Trushield SBS membrane must be protected immediately after application from damage due to ongoing site activity or sharp aggregates during backfilling. Use a tough, weather-resistant, warp- and rot-proof asphaltic protection board. Alternatively, on horizontal areas, protection can also be provided by laying a 50 mm cement-sand screed.

PRECAUTIONS

- Do not apply during rain or extreme temperatures.
- Trushield membranes are not UV- or weather-resistant and must be protected immediately after application.
- Avoid mechanical abuse that could puncture the membrane.
- Ensure the membrane is applied at least 6 inches inside the drain pipe.
- For optimal performance, apply the membrane parapet to parapet to envelope the entire structure.
- Low temperatures may reduce adhesion and tack, while high temperatures may soften the material and make it overly adhesive.

TECHNICAL PROPERTIES

S.NO.	PROPERTIES	RESULT
1.	Roll Length / Width (unit of measurement?)	10 ± 2%, 1 ± 2%
2.	Thickness, mm (ASTM D 5147)	1.5 ± 5%
3.	Tensile Strength, L/T or MPa (ASTM D 412)	Min. 3.5 / Min. 3.5
4.	Elongation % (ASTM D 412)	Min. 300 / Min. 300
5.	Peel Strength on Primed Surface, MPa	Min. 1.5 (ASTM D 1000)
6.	Puncture Resistance, N (ASTM E 154)	Min. 280
7.	Tear Strength (L/T), N	Min. 25.5/Min. 34.2
8.	Hydrostatic Pressure, Bar	Min 5
9.	Crack Bridging Ability, mm	Min 1.5
10.	Weight per Roll, kg	16.5*

* Approximate Weight

HANDLING PRECAUTIONS

Standard industrial hygiene practices must be followed during handling and application. Please refer to the Material Safety Data Sheet (MSDS) for detailed safety information.

STORAGE

Store membranes in a shaded area on wooden pallets, covered with thick fabric and securely tied to minimize exposure to sunlight and UV rays.

Protect the membranes from all sources of heat and cold.

SHELF LIFE

18 months if stored as per the above recommendations. Excessive exposure to sunlight, UV rays, or heat will significantly deteriorate the product and reduce its shelf life.

DISCLAIMER: This technical data sheet replaces all previous versions of it from the immediate effect. The information, and, in particular, the recommendations relating to the application and end-use of Astral Ltd, construction chemical products, are given in good faith based on our knowledge and experience of the products when properly stored, handled and applied under suitable favourable conditions in accordance with application instructions recommended in product technical data sheet. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. For the products on which company is offering warranty, please refer to warranty document to know entire terms and conditions. The same can be availed on request or from company website. The values mentioned in the above tables in technical data sheet are obtained in controlled lab conditions when tested properly by competent laboratory. Tolerance up to five to ten percentage on the lower side from the above values are allowable. Astral Ltd. reserves the right to change the properties of its products without notice. The end user of the product must test the product's suitability for the intended application and purpose. Astral Ltd will not bear any responsibilities on the product failure if it is wrongly positioned or if improper application methodology is adopted by the user or the applicator. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local product technical data sheet for the product concerned, copies of which will be supplied on request. No freedom from any patent owned by Seller or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, customer is responsible for determining whether products and the information in this document are appropriate for the customer's use and for ensuring that the customer's workplace, and disposal practices are in compliance with applicable laws and other governmental enactments.