


Measured round-trip call latency (set_brightness, N=1000 per transport)

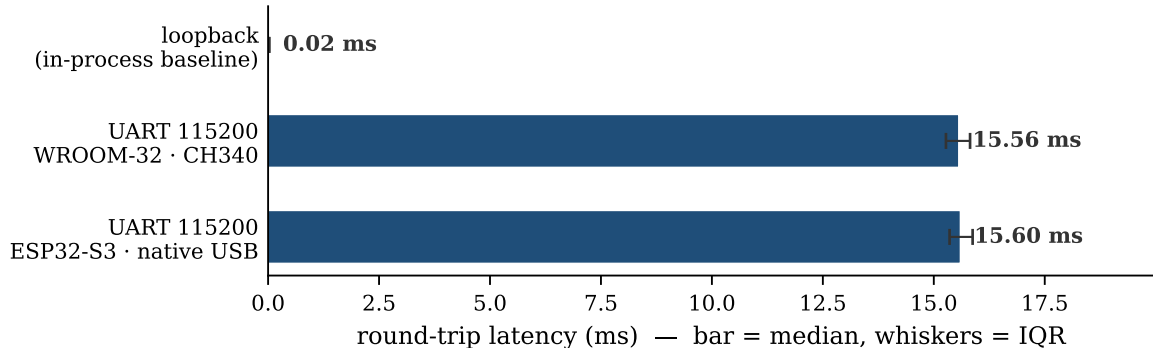

Measured by tools/bench_latency.py. The loopback row is the protocol's own encode/decode cost with no wire; the two UART rows are real hardware. CH340 and native-USB transports land within 0.05 ms of each other.