

4496203 HITACHI/ LOGIC/ARRAYS/MEM

04E 12622 D

HM6264 Series**Maintenance Only**
(Substitute HM6264A)

T-46-23-12

8192-word x 8-bit High Speed CMOS Static RAM**■ FEATURES**

- Fast access Time 100ns/120ns/150ns (max.)
- Low Power Standby Standby: 0.1mW (typ.)
10μW (typ.) L-/LL-version
Operating: 200mW/MHz (typ.)
- Low Power Operation
- Single +5V Supply
- Completely Static Memory. . . . No clock or Timing Strobe Required
- Equal Access and Cycle Time
- Common Data Input and Output, Three State Output
- Directly TTL Compatible: All Input and Output
- Standard 28pin Package Configuration
- Pin Out Compatible with 64K EPROM HN482764
- Capability of Battery Back Up Operation (L-/LL-version)

■ ORDERING INFORMATION

Type No.	Access Time	Package
HM6264P-10	100ns	600 mil 28 pin Plastic DIP
HM6264P-12	120ns	
HM6264P-15	150ns	
HM6264LP-10	100ns	
HM6264LP-12	120ns	
HM6264LP-15	150ns	
HM6264LP-10L	100ns	28 pin Plastic SOP (Note)
HM6264LP-12L	120ns	
HM6264LP-15L	150ns	
HM6264FP-10	100ns	
HM6264FP-12	120ns	
HM6264FP-15	150ns	
HM6264LFP-10	100ns	
HM6264LFP-12	120ns	
HM6264LFP-15	150ns	
HM6264LFP-10L	100ns	
HM6264LFP-12L	120ns	
HM6264LFP-15L	150ns	

Note) A character T is added to the end of type No. for SOP of 3.00 mm (max.) thickness.

■ ABSOLUTE MAXIMUM RATINGS


Item	Symbol	Rating	Unit
Terminal Voltage *1	V _T	-0.5*2 to +7.0	V
Power Dissipation	P _T	1.0	W
Operating Temperature	T _{opr}	0 to +70	°C
Storage Temperature	T _{stg}	-55 to +125	°C
Storage Temperature Under Bias	T _{bias}	-10 to +85	°C

Notes) *1. With respect to V_{SS}

*2. -3.0V for pulse width ≤ 50ns


Note) This device is not available for new application.

HM6264P Series




(DP-28)

HM6264FP Series



(FP-28D/DA)

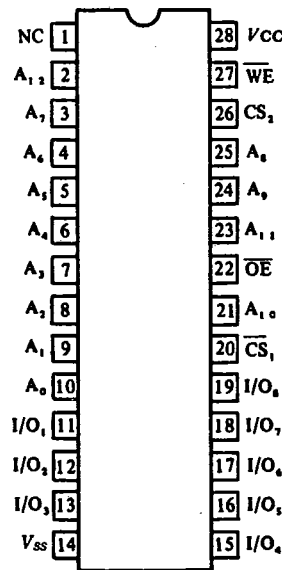■ PIN ARRANGEMENT

(Top View)



Hitachi America Ltd. • 2210 O'Toole Ave. • San Jose, CA 95131 • (408) 435-8300

125

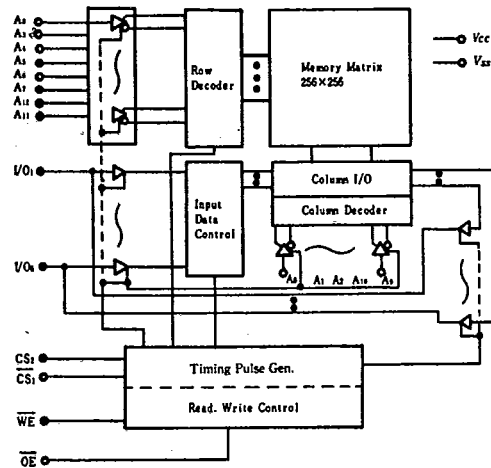
4496203 HITACHI/ LOGIC/ARRAYS/MEM

04E 12623 D

HM6264 Series

T-46-23-12

■ BLOCK DIAGRAM



■ TRUTH TABLE

WE	CS ₁	CS ₂	OE	Mode	I/O Pin	V _{CC} Current	Note
X	H	X	X	Not Selected (Power Down)	High Z	I _{SB} , I _{SB1}	
X	X	L	X		High Z	I _{SB} , I _{SB2}	
H	L	H	H	Output Disabled	High Z	I _{CC} , I _{CC1}	
H	L	H	L	Read	Dout	I _{CC} , I _{CC1}	
L	L	H	H	Write	Din	I _{CC} , I _{CC1}	Write Cycle (1)
L	L	H	L		Din	I _{CC} , I _{CC1}	Write Cycle (2)

X : H or L

■ RECOMMENDED DC OPERATING CONDITIONS ($T_a = 0$ to $+70^\circ\text{C}$)

Item	Symbol	min	typ	max	Unit
Supply Voltage	V _{CC}	4.5	5.0	5.5	V
	V _{SS}	0	0	0	V
Input Voltage	V _{IH}	2.2	—	6.0	V
	V _{IL}	-0.3*1	—	0.8	V

Note) *1. -3.0V for pulse width $\leq 50\text{ns}$ ■ DC AND OPERATING CHARACTERISTICS ($V_{CC} = 5V \pm 10\%$, $V_{SS} = 0V$, $T_a = 0$ to $+70^\circ\text{C}$)

Item	Symbol	Test Condition	min	typ*1	max	Unit
Input Leakage Current	I _{LI}	V _{in} =V _{SS} to V _{CC}	—	—	2	μA
Output Leakage Current	I _{LO}	CS ₁ =V _{IH} or CS ₂ =V _{IL} or OE=V _{IH} or WE=V _{IL} , V _{I/O} =V _{SS} to V _{CC}	—	—	2	μA
Operating Power Supply Current	I _{CC}	CS ₁ =V _{IL} , CS ₂ =V _{IH} , I _{I/O} =0mA	—	40	80	mA
Average Operating Current	I _{CC1}	Min. cycle, duty=100%, I _{I/O} =0mA	—	60	110	mA
Standby Power Supply Current	I _{SB}	CS ₁ =V _{IH} or CS ₂ =V _{IL}	—	1	3	mA
	I _{SB1} *2	CS ₁ $\geq V_{CC}-0.2V$, CS ₂ $\geq V_{CC}-0.2V$ or CS ₂ $\leq 0.2V$	—	0.02	2	mA
			—	2*3	100*3	μA
			—	2*4	50*4	μA
	I _{SB2} *2	CS ₂ $\leq 0.2V$	—	0.02	2	mA
			—	2*3	100*3	μA
Output Voltage	V _{OL}	I _{OL} = 2.1mA	—	—	0.4	V
	V _{OH}	I _{OH} = -1.0 mA	2.4	—	—	V

Notes) *1. Typical limits are at V_{CC}=5.0V, T_a=25°C and specified loading.*2. V_{IL} min=-0.3V

*3. This characteristics is guaranteed only for L-version.

*4. This characteristics is guaranteed only for LL-version.



4496203 HITACHI/ LOGIC/ARRAYS/MEM

04E 12624 D

HM6264 Series

T-44-23-12

■ CAPACITANCE ($f = 1\text{MHz}$, $T_a = 25^\circ\text{C}$)

Item	Symbol	Test Condition	typ	max	Unit
Input Capacitance	C_{in}	$V_{in} = 0\text{V}$	—	6	pF
Input/Output Capacitance	$C_{I/O}$	$V_{I/O} = 0\text{V}$	—	8	pF

(Note) This parameter is sampled and not 100% tested.

■ AC CHARACTERISTICS ($V_{CC} = 5\text{V} \pm 10\%$, $T_a = 0$ to $+70^\circ\text{C}$)

• AC TEST CONDITIONS

Input Pulse Levels: 0.8 to 2.4V

Input Rise and Fall Times: 10ns

Input and Output Timing Reference Level: 1.5V


Output Load: 1TTL Gate and C_L (100pF) (including scope and jig)

• READ CYCLE

Item		Symbol	HM6264-10		HM6264-12		HM6264-15		Unit
			min	max	min	max	min	max	
Read Cycle Time		t_{RC}	100	—	120	—	150	—	ns
Address Access Time		t_{AA}	—	100	—	120	—	150	ns
Chip Selection to Output	$\overline{CS1}$	t_{CO1}	—	100	—	120	—	150	ns
	$\overline{CS2}$	t_{CO2}	—	100	—	120	—	150	ns
Output Enable to Output Valid		t_{OE}	—	50	—	60	—	70	ns
Chip Selection to Output in Low Z	$\overline{CS1}$	t_{LZ1}	10	—	10	—	15	—	ns
	$\overline{CS2}$	t_{LZ2}	10	—	10	—	15	—	ns
Output Enable to Output in Low Z		t_{OLZ}	5	—	5	—	5	—	ns
Chip Deselection to Output in High Z	$\overline{CS1}$	t_{HZ1}	0	35	0	40	0	50	ns
	$\overline{CS2}$	t_{HZ2}	0	35	0	40	0	50	ns
Output Disable to Output in High Z		t_{OHZ}	0	35	0	40	0	50	ns
Output Hold from Address Change		t_{OH}	10	—	10	—	15	—	ns

Notes) 1. t_{HZ} and t_{OHZ} are defined as the time at which the outputs achieve the open circuit condition and are not referred to output voltage levels.2. At any given temperature and voltage condition, t_{HZ} max is less than t_{LZ} min both for a given device and from device to device.

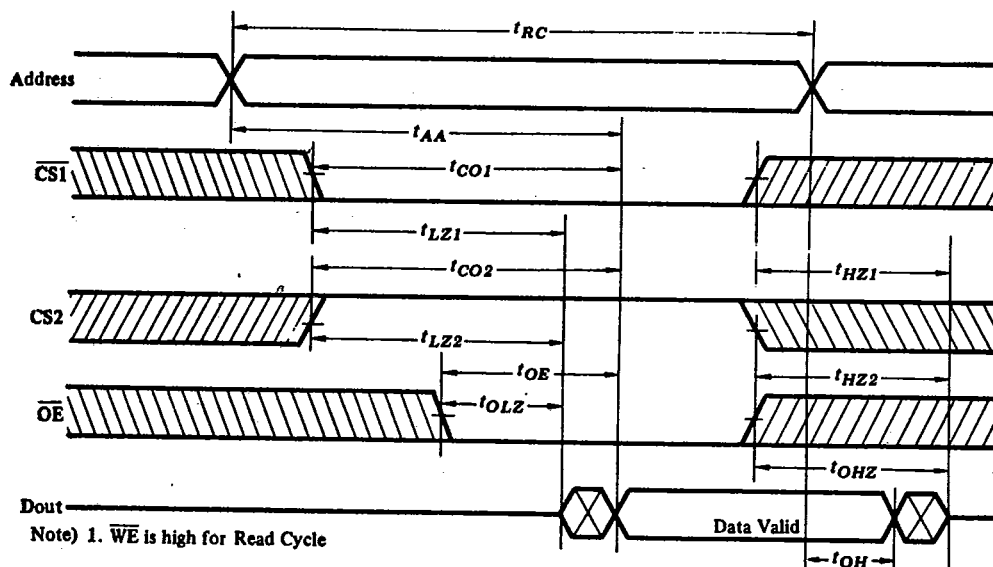• READ CYCLE



4496203 HITACHI/ LOGIC/ARRAYS/MEM
HM6264 Series


04E 12625 D

T-46-23-12

• WRITE CYCLE

Item		Symbol	HM6264-10		HM6264-12		HM6264-15		Unit
			min	max	min	max	min	max	
Write Cycle Time		t_{WC}	100	—	120	—	150	—	ns
Chip Selection to End of Write		t_{CW}	80	—	85	—	100	—	ns
Address Setup Time		t_{AS}	0	—	0	—	0	—	ns
Address Valid to End of Write		t_{AW}	80	—	85	—	100	—	ns
Write Pulse Width		t_{WP}	60	—	70	—	90	—	ns
Write Recovery Time	CS1, WE	t_{WR1}	5	—	5	—	10	—	ns
	CS2	t_{WR2}	15	—	15	—	15	—	ns
Write to Output in High Z		t_{WHZ}	0	35	0	40	0	50	ns
Data to Write Time Overlap		t_{DW}	40	—	50	—	60	—	ns
Data Hold from Write Time		t_{DH}	0	—	0	—	0	—	ns
\overline{OE} to Output in High Z		t_{OHZ}	0	35	0	40	0	50	ns
Output Active from End of Write		t_{OW}	5	—	5	—	10	—	ns

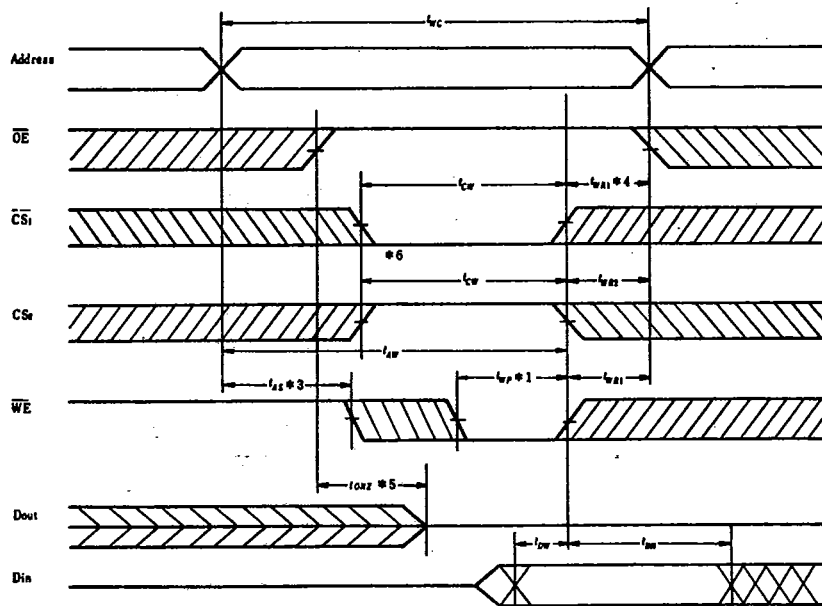
• WRITE CYCLE (1) (\overline{OE} clock)



4496203 HITACHI/ LOGIC/ARRAYS/MEM

04E 12626 D
HM6264 Series

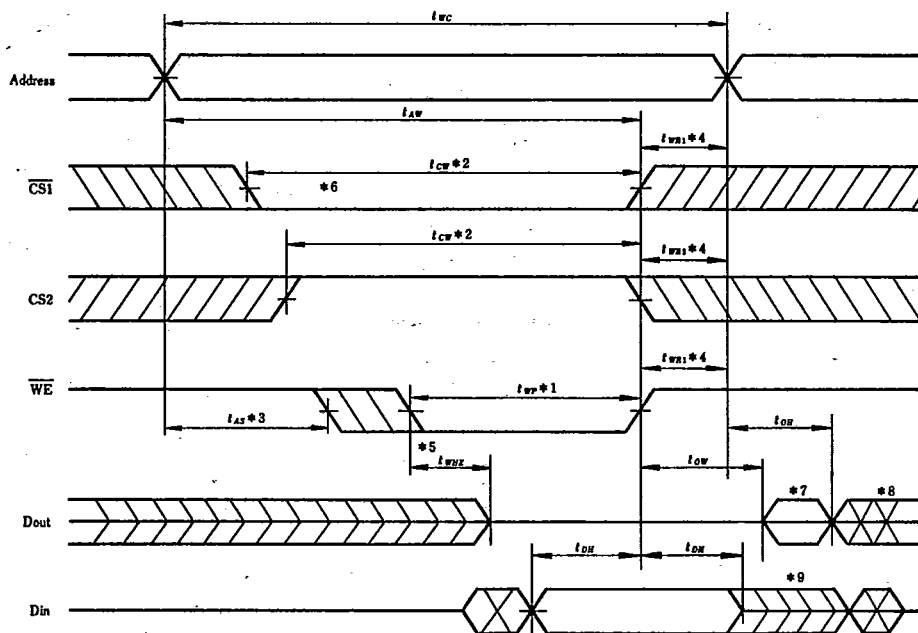T-46-23-12

• WRITE CYCLE (2) (\overline{OE} Low Fix)

- Notes)
1. A write occurs during the overlap of a low $\overline{CS1}$, a high $\overline{CS2}$ and a low \overline{WE} . A write begins at the latest transition among $\overline{CS1}$ going low, $\overline{CS2}$ going high and \overline{WE} going low. A write ends at the earliest transition among $\overline{CS1}$ going high, $\overline{CS2}$ going low and \overline{WE} going high. t_{WP} is measured from the beginning of write to the end of write.
 2. t_{CW} is measured from the later of $\overline{CS1}$ going low or $\overline{CS2}$ going high to the end of write.
 3. t_{AS} is measured from the address valid to the beginning of write.
 4. t_{WR} is measured from the end of write to the address change.
 t_{WR1} applies in case a write ends at $\overline{CS1}$ or \overline{WE} going high.
 t_{WR2} applies in case a write ends at $\overline{CS2}$ going low.
 5. During this period, I/O pins are in the output state, therefore the input signals of opposite phase to the outputs must not be applied.
 6. If $\overline{CS1}$ goes low simultaneously with \overline{WE} going low or after \overline{WE} going low, the outputs remain in high impedance state.
 7. $Dout$ is the same phase of the latest written data in this write cycle.
 8. $Dout$ is the read data of next address.
 9. If $\overline{CS1}$ is low and $\overline{CS2}$ is high during this period, I/O pins are in the output state. Therefore, the input signals of opposite phase to the outputs must not be applied to them.



4496203 HITACHI/ LOGIC/ARRAYS/MEM
HM6264 Series

04E 12627 D



T-46-23-12

■ LOW V_{CC} DATA RETENTION CHARACTERISTICS ($T_a = 0$ to $+70^\circ\text{C}$)

This characteristics is guaranteed only for L/LL-version.

Item	Symbol	Test Condition	min	typ	max	Unit
V_{CC} for Data Retention	V_{DR1}	$CS1 \geq V_{CC} - 0.2\text{V}$, $CS2 \geq V_{CC} - 0.2\text{V}$ or $CS2 \leq 0.2\text{V}$	2.0	—	—	V
	V_{DR2}	$CS2 \leq 0.2\text{V}$	2.0	—	—	V
Data Retention Current	I_{CCDR1}	$V_{CC} = 3.0\text{V}$, $CS1 \geq V_{CC} - 0.2\text{V}$	—	1*1	50*1	μA
		$CS2 \geq V_{CC} - 0.2\text{V}$ or $CS2 \leq 0.2\text{V}$	—	1*2	25*2	μA
	I_{CCDR2}	$V_{CC} = 3.0\text{V}$, $CS2 \leq 0.2\text{V}$	—	1*1	50*1	μA
			—	1*2	25*2	μA
Chip Deselect to Data Retention Time	t_{CDR}	See Retention Waveform	0	—	—	ns
Operation Recovery Time	t_R		t_{RC}^{*3}	—	—	ns

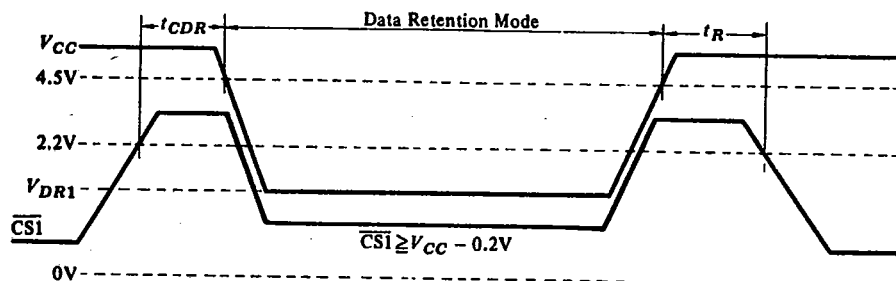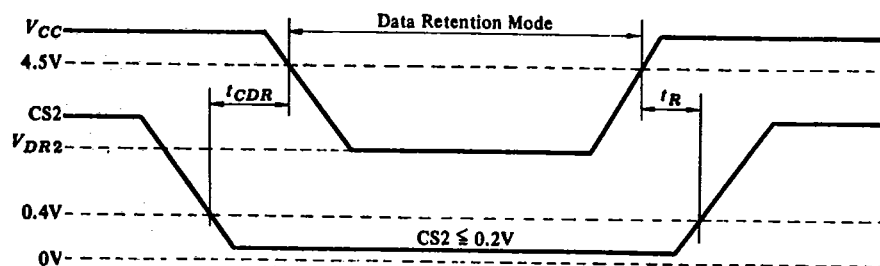Notes) *1. V_{IL} min = -0.3V , $20\mu\text{A}$ max at $T_a = 0$ to 40°C . This characteristics is guaranteed only for L-version.
 *2. V_{IL} min = -0.3V , $10\mu\text{A}$ max at $T_a = 0$ to 40°C . This characteristics is guaranteed only for LL-version.
 *3. t_{RC} = Read Cycle Time

• LOW V_{CC} DATA RETENTION WAVEFORM (1) ($\overline{CS1}$ Controlled)• LOW V_{CC} DATA RETENTION WAVEFORM (2) ($CS2$ Controlled)

NOTE: In Data Retention Mode, $CS2$ controls the Address, \overline{WE} , $\overline{CS1}$, \overline{OE} and Din buffer. If $CS2$ controls data retention mode, V_{in} for these inputs can be in the high impedance state. If $\overline{CS1}$ controls the data retention mode, $CS2$ must satisfy either $CS2 > V_{CC} - 0.2\text{V}$ or $CS2 \leq 0.2\text{V}$. The other input levels (address, \overline{WE} , \overline{OE} , I/O) can be in the high impedance state.

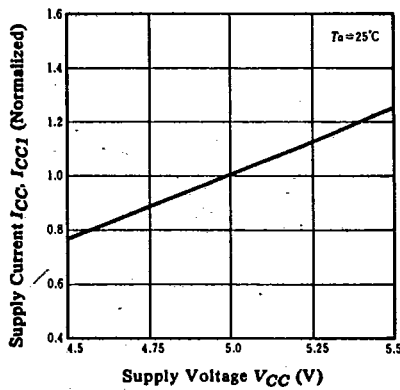
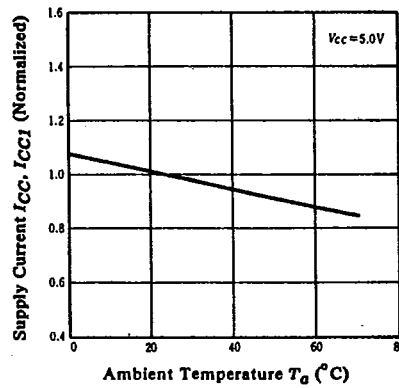


4496203 HITACHI/ LOGIC/ARRAYS/MEM


04E 12628 D

HM6284 Series


T-46-23-12

SUPPLY CURRENT vs.
SUPPLY VOLTAGESUPPLY CURRENT vs.
AMBIENT TEMPERATURE


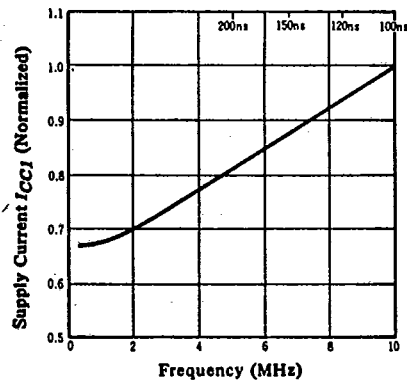
SUPPLY CURRENT vs. FREQUENCY



ACCESS TIME vs. LOAD CAPACITANCE

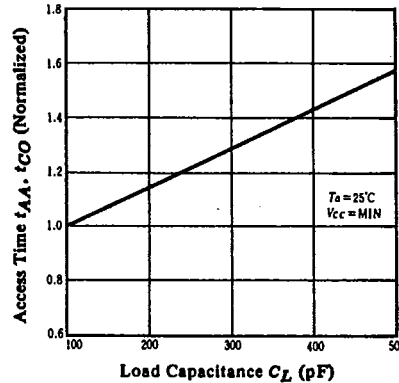

ACCESS TIME vs. SUPPLY VOLTAGE

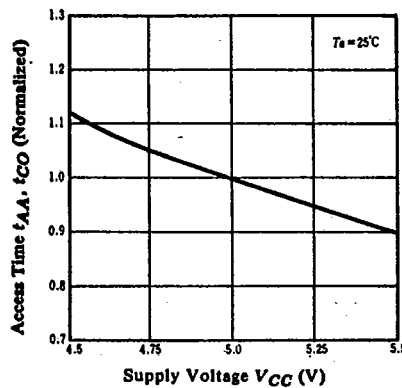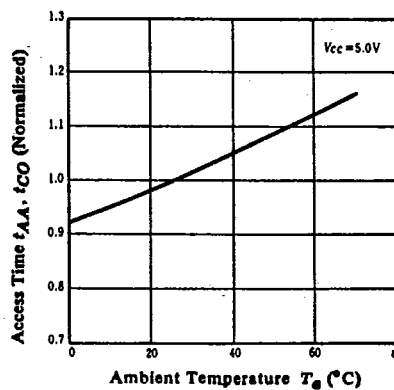ACCESS TIME vs.
AMBIENT TEMPERATURE
HITACHI

Hitachi America Ltd. • 2210 O'Toole Ave. • San Jose, CA 95131 • (408) 435-8300

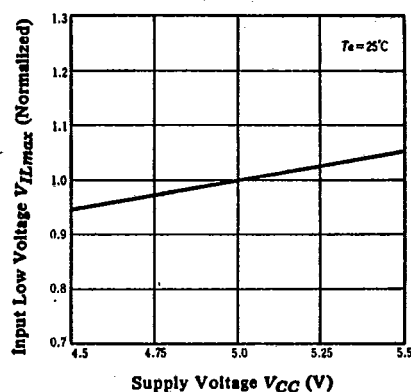
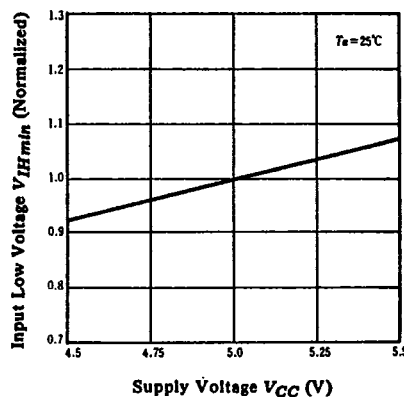
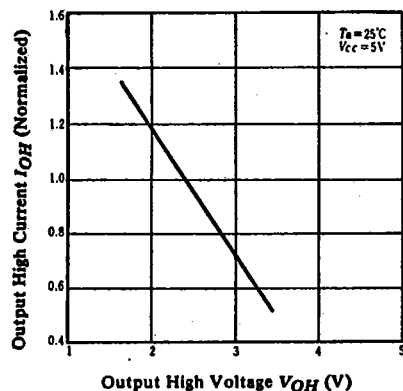
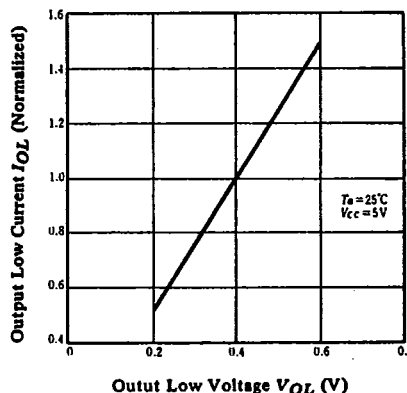
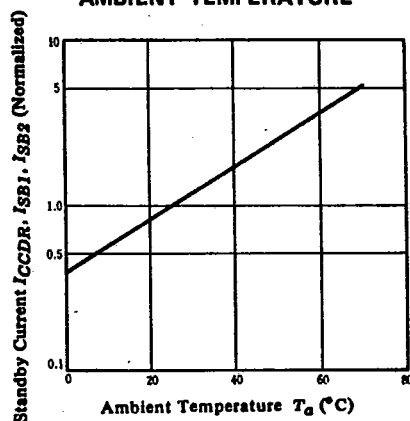
131

4496203 HITACHI/ LOGIC/ARRAYS/MEM

04E 12629 D

HM6264 Series

T-46-23-12

INPUT LOW VOLTAGE vs.
SUPPLY VOLTAGEINPUT HIGH VOLTAGE vs.
SUPPLY VOLTAGEOUTPUT CURRENT vs.
OUTPUT VOLTAGEOUTPUT CURRENT vs.
OUTPUT VOLTAGESTANDBY CURRENT vs.
AMBIENT TEMPERATURESTANDBY CURRENT vs.
SUPPLY VOLTAGE