
Glow ring: 4 x WS2812B-Mini, one chain

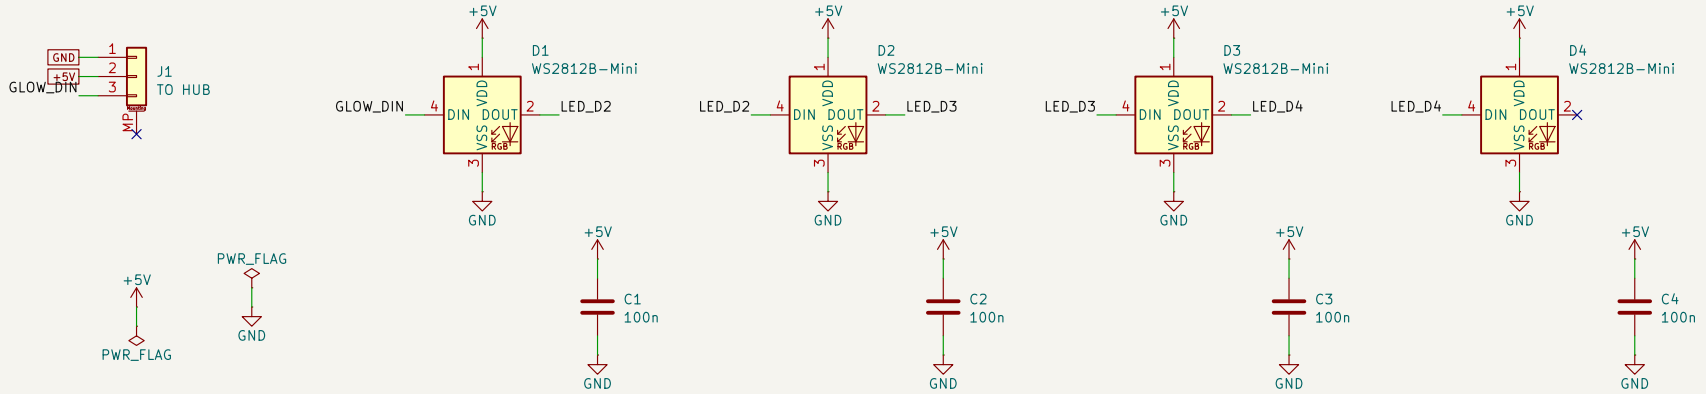

Chain: J1 -> D1 bottom right -> D2 top right -> D3 top left -> D4 bottom left (as the firmware expects).
The level shifter and the 330 ohm series resistor are on the hub; brightness is capped in firmware (45 %).
Board outline from the CAD: a thin frame around the key collar, LEDs at today's carrier positions.

3-pin JST SH cable to the hub's J8. Generated by gen_schematics.py.
4 x WS2812B-Mini where the kit's hand-wired LED carriers sit; owner chose an assembled board 202

aikos-home / RoomKey

Sheet: /
File: roomkey-glow-ring.kicad_sch

Title: RoomKey glow ring (frame around the key, behind the collar)

Size: A4	Date: 2026-10-08	**Rev: A (draft)**
KiCad E.D.A. 10.0.7		Id: 1/1