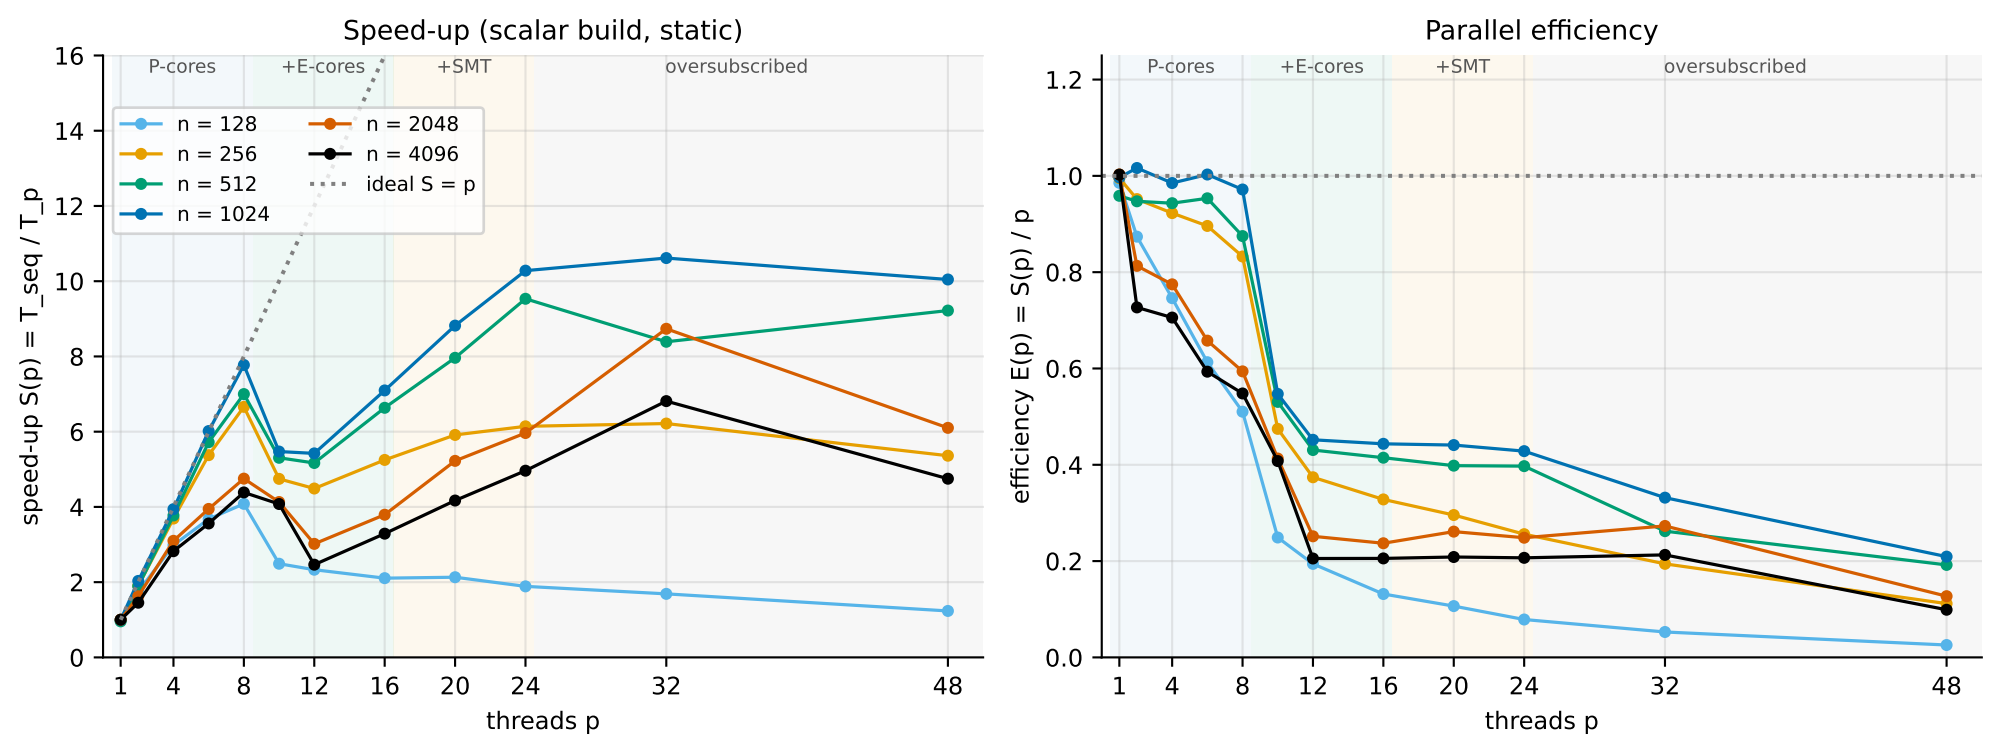
Speed-up (scalar build, static)
P-cores
+E-cores
+SMT
oversubscribed
n = 128
n = 256
n = 512
n = 1024
n = 2048
n = 4096
ideal S = p
speed-up S(p) = T_seq / T_p
threads p
Parallel efficiency
efficiency E(p) = S(p) / p
threads p