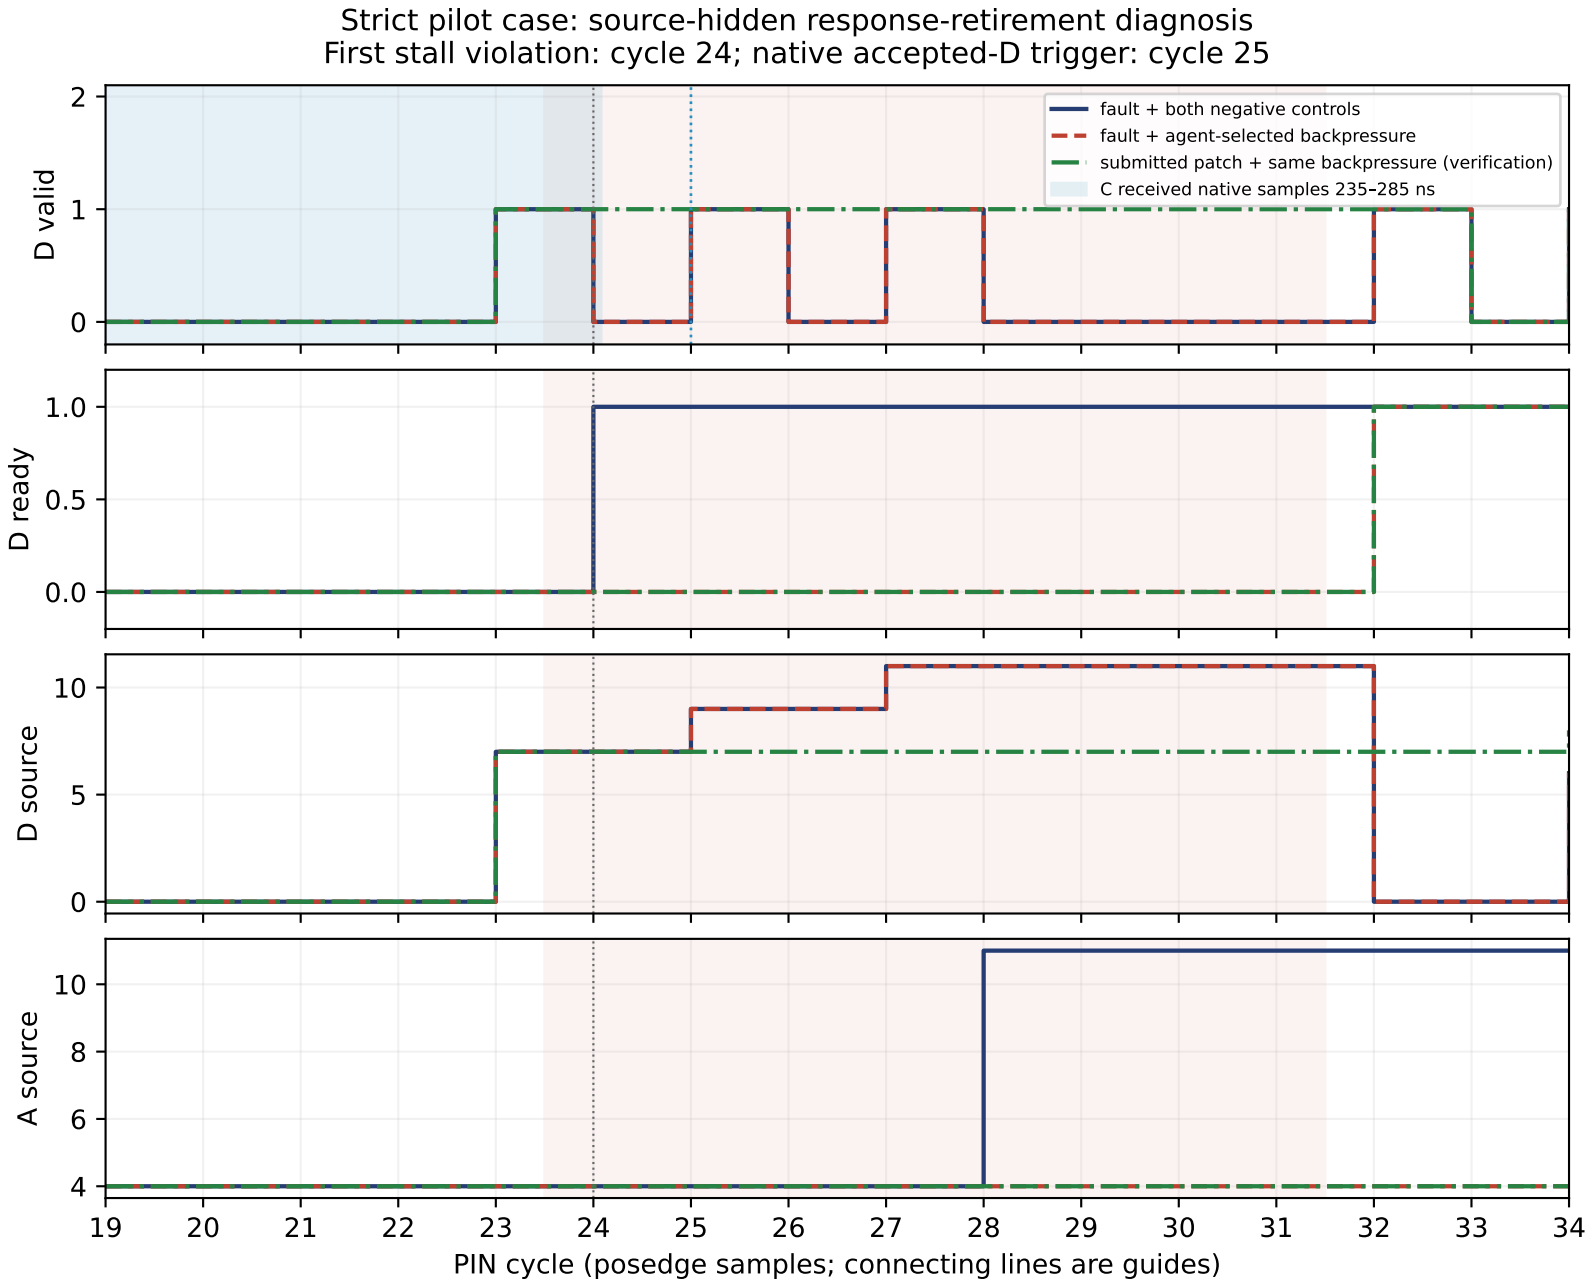
Strict pilot case: source-hidden response-retirement diagnosis
First stall violation: cycle 24; native accepted-D trigger: cycle 25
D valid
D ready
D source
A source
fault + both negative controls
fault + agent-selected backpressure
submitted patch + same backpressure (verification)
C received native samples 235–285 ns
PIN cycle (posedge samples; connecting lines are guides)