




Power Stage

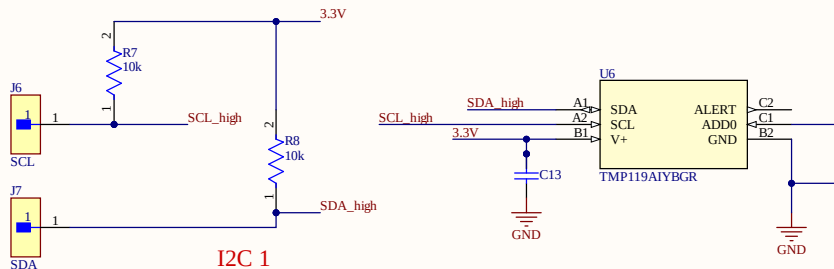


I2C 1

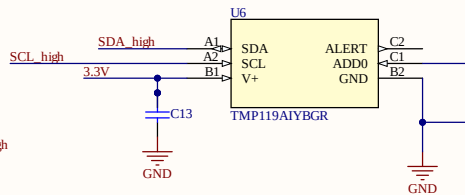


Temperature Sensor

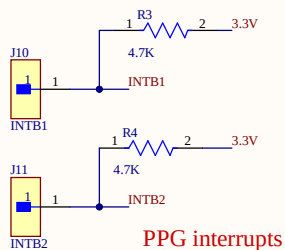


PPG interrupts




VDD

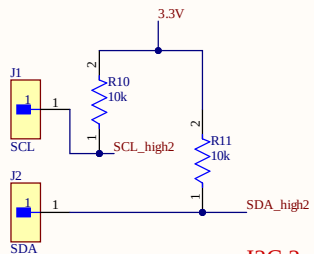


I2C 2

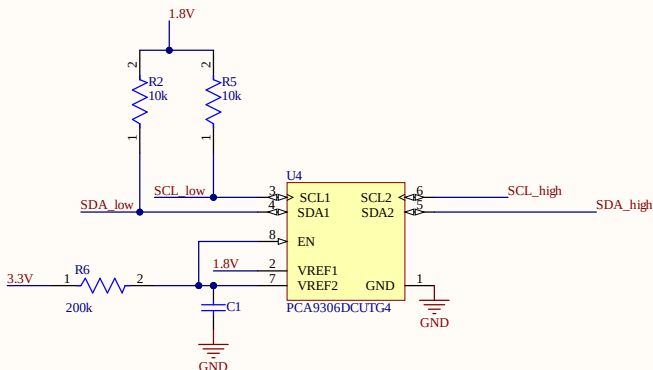


Bidirectional I2C Bus 1

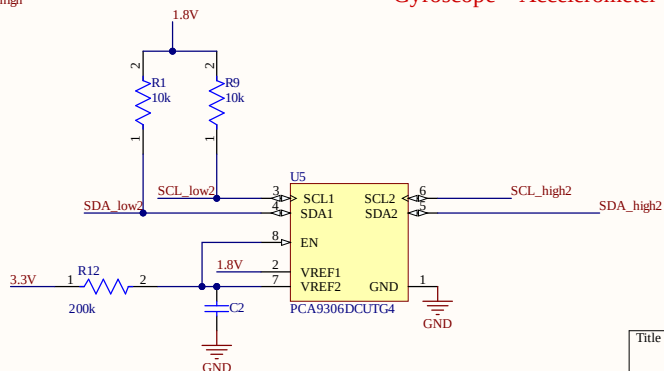


Bidirectional I2C Bus 2

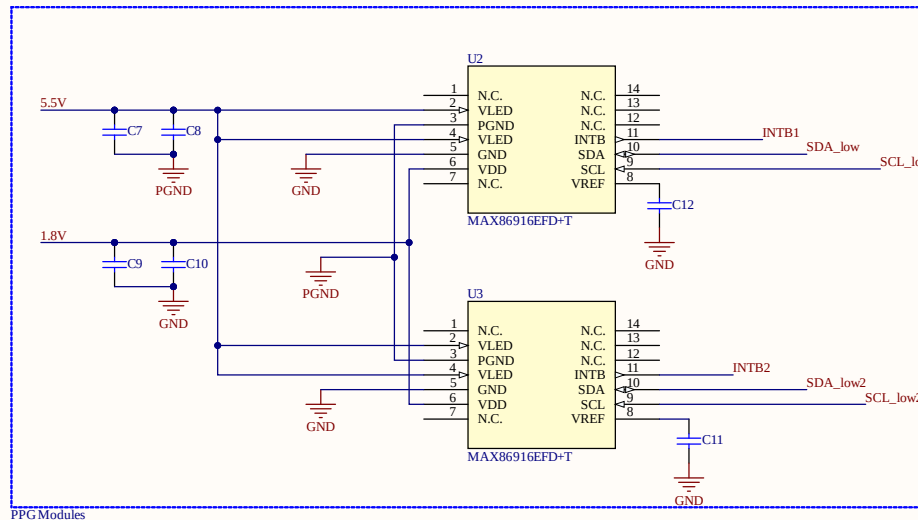

PPG Modules

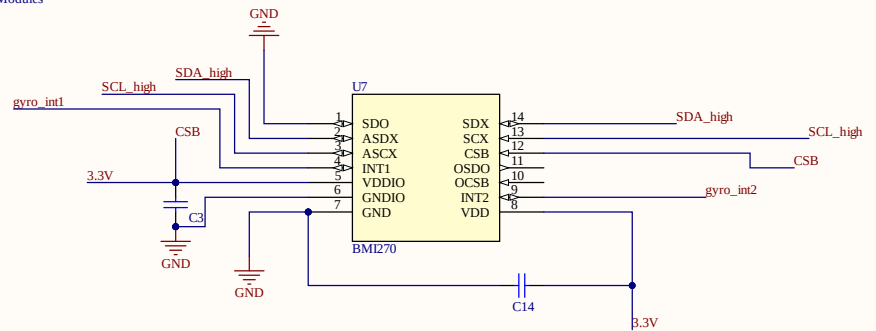

Gyroscope + Accelerometer

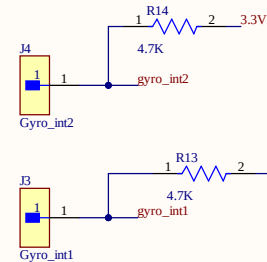

Gyro Interrupts

Title		
Size	Number	Revision
B		
Date:	9/29/2025	Sheet of
File:	C:\Users\...\Sheet1.SchDoc	Drawn By:

Comment	Description	Designator	Footprint	LibRef	Quantity
C0805C225K9PACTU		C1, C2, C3, C4, C5, C6, C7, C8, C9, C10, C11, C12, C13, C14	CAPC2013X145X50ML 20T25	CMP-1036-04819-2	14
SCL	CONN HEADER VERT 1POS	J1, J6	FP-TSW-101-07-L-S-MFG	CMP-02766-001775-1	2
SDA	CONN HEADER VERT 1POS	J2, J7	FP-TSW-101-07-L-S-MFG	CMP-02766-001775-1	2
Gyro_int1	CONN HEADER VERT 1POS	J3	FP-TSW-101-07-L-S-MFG	CMP-02766-001775-1	1
Gyro_int2	CONN HEADER VERT 1POS	J4	FP-TSW-101-07-L-S-MFG	CMP-02766-001775-1	1
GND	CONN HEADER VERT 1POS	J8	FP-TSW-101-07-L-S-MFG	CMP-02766-001775-1	1
5V	CONN HEADER VERT 1POS	J9	FP-TSW-101-07-L-S-MFG	CMP-02766-001775-1	1
INTB1	CONN HEADER VERT 1POS	J10	FP-TSW-101-07-L-S-MFG	CMP-02766-001775-1	1
INTB2	CONN HEADER VERT 1POS	J11	FP-TSW-101-07-L-S-MFG	CMP-02766-001775-1	1
VDD	CONN HEADER VERT 1POS	J12	FP-TSW-101-07-L-S-MFG	CMP-02766-001775-1	1
1.8V	CONN HEADER VERT 1POS	J13	FP-TSW-101-07-L-S-MFG	CMP-02766-001775-1	1
10k	RES Thick Film, 16k Ω , 1%, 0.125W, 100ppm/ $^{\circ}$ C, 0805	R1, R2, R5, R7, R8, R9, R10, R11	FP-CRCW0805-e3-IPC_C	CMP-2001-04979-2	8
4.7K	RES Thick Film, 16k Ω , 1%, 0.125W, 100ppm/ $^{\circ}$ C, 0805	R3, R4, R13, R14	FP-CRCW0805-e3-IPC_C	CMP-2001-04979-2	4
200k	RES Thick Film, 16k Ω , 1%, 0.125W, 100ppm/ $^{\circ}$ C, 0805	R6, R12	FP-CRCW0805-e3-IPC_C	CMP-2001-04979-2	2
MCP1700T-1802E/TT	Low Quiescent Current LDO, 3-Pin SOT-23, Extended Temperature, Tape and Reel	U1	SOT-23-TT3_M	CMP-0136-00773-1	1
MAX86916EFD+T	Integrated Optical Sensor Module for Mobile Health	U2, U3	21-100325_F143H7MK+1_MXM	MAX86916EFD+T	2
PCA9306DCUTG4	Dual Bi-Directional I2C-Bus and SMBus Voltage Level-Translator, 0 to 5.5 V, -40 to 85 degC, 8-pin USB (DCU), Green (RoHS& no Sb/Br)	U4, U5	DCU0008A_N	CMP-0314-00423-2	2
TMP119A1YBGR	Δ $\pm$ 0.08 $^{\circ}$ C accurate digital temperature sensor in WCSP package with enhanced strain tolerance 6-DSBGA-55 to 150	U6	DSBGA6_YBG_TEX	TMP119A1YBGR	1
BMI270	No Description Available	U7	BMI270_BOS	BMI270	1