AC-Series FILTER UNITS

Technical Specifications:

VANTERM

Passion for excellence in clean air solutions.



AC-323-INV Filter Unit

Power Control and Saving with Automatic Pressure Transmitter Controlled VFD

M | DIN EN 60335-2-69 Dust Class M 0,2-2 µm %99,9 | M

CE

PLUG-n-PLAY
Ready to operate!

MULTI-PURPOSE

- Designed for dedusting of dry dust, generated during various industrial operations (i.e. sandblasting, welding, mixing etc.)
- Ready-to-operate with filters, integrated fan, automatic jet pulse filter cleaning system and control panel.
- Availability of placing filter unit adjacent to corners and walls – Saves space on production ground.
- Low Sound Level ≤70-75dB(A) depending on model.

ENERGY SAVING - AUTOMATION

- With Dust Class M filters, filtered-clean air recycled to the plant environment prevents heat loss and ensures environment friendly and healthy application.
- Low consumption of pressured-air with ΔP controlled automatic VANTERM K-type jet-pulse cleaning.
- As standard slave mod available, automatic start and stop synchronous with the related parent process.
- All Electrical Voltage and Frequency configurations (ex.480V 3P~60 hz.) are available with automation and power control implemented via worldwide available components.
- OPTIONAL-Automatic PID control with pressure transmitter regulated VFD (Variable Frequency Drive) for fan speed control ensures energy saving with optimum performance.
- OPTIONAL - Low air flow output signal and alarm ensure hands-on approach for performance observation, process safety and maintenance.

SAFETY- DURABILITY

- High filtration efficiency with Dust Class: M certified (acc. to EN 60335-2-69) filter elements which arrests 0,2-2 micron particles with 99,9% efficiency.
- Dedusting Class W3 certification according to EN ISO 15012-1 is in progress.
- Maximum operational safety with fully integrated control panel and internal electrical wiring.
- Visual real-time dust level control of filter elements via manometer.
- OPTIONAL-Aluminum coated, ePTFE Teflon membrane, Flame Retardant Polyester and Stainless steel construction Propylene nonwoven filter elements are available on request.
- Ave. 10000-15000 working hour lifespan with specially designed filter cartridges, effective jet pulse cleaning and integrated inlet diffuser which ensures impact-free entrance.
- The fan impellers up to 18,5kW motor sizes are made of aluminum. The fan impellers, bigger than 18,5kW, are made of steel. All fans confirming ERP 2015 with G2.5 balance grade (static and dynamic).

EASY MAINTENANCE

- Easy access doors to every component solely from the front side of the filter unit.
- Unique dust bin locking mechanism, dust bins are unlocked, offloaded and replaced in matter of seconds.



Diffuser entry




Easy Dust Bin Mechanism



Easy Access to Cartridge Filters

Self-Tapped Cartridges are easy to change without need of an extra tool.

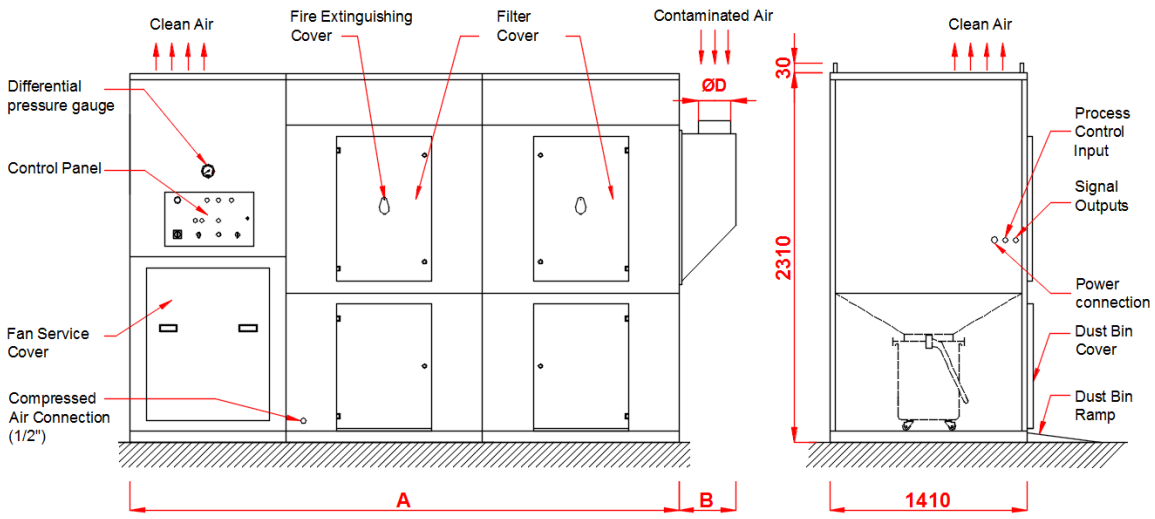

TYPE	CAPACITY (m^3/h)	FAN PRESSURE (Pa)	MOTOR (kW)	FILTER AREA (m^2)	DUST BIN (lt)	A (mm)	B (mm)	ØD (mm)	WEIGHT (kg)
AC-123	5040 - 8400	2700	7,5	84	80	2120	576	355	915
AC-124	5040 - 8400	4000	11,0	84	80	2120	576	355	983
AC-125	5040 - 8400	5400	15,0	84	80	2120	576	355	995
AC-163	6720 - 11200	3000	11,0	112	80	2400	576	400	1049
AC-164	6720 - 11200	4100	15,0	112	80	2400	576	400	1061
AC-165	6720 - 11200	5050	18,5	112	80	2400	576	400	1076
AC-202	8400 - 14000	2500	11,0	140	80	2680	576	450	1153
AC-203	8400 - 14000	3400	15,0	140	80	2680	576	450	1165
AC-204	8400 - 14000	4200	18,5	140	80	2680	576	450	1180
AC-205	8400 - 14000	5000	22,0	140	80	2680	576	450	1202
AC-242	10080 - 16800	2750	15,0	168	2x80	3080	730	500	1284
AC-243	10080 - 16800	3400	18,5	168	2x80	3080	730	500	1299
AC-244	10080 - 16800	4000	22,0	168	2x80	3080	730	500	1330
AC-322	13440 - 22400	2500	18,5	224	2x80	3640	730	560	1413
AC-323	13440 - 22400	3000	22,0	224	2x80	3640	730	560	1445
AC-324	13440 - 22400	4120	30,0	224	2x80	3640	730	560	1513
AC-402	16800 - 28000	2420	22,0	280	2x80	4200	730	600	1564
AC-403	16800 - 28000	3300	30,0	280	2x80	4200	730	600	1632
AC-404	16800 - 28000	4060	37,0	280	2x80	4200	730	600	1664

***Ongoing product development may subject the technical specifications to alteration without notice.**

- Ready-to-operate with filters, built-in fan-motor group, silencer and control panel.
- Electrical connection 400V, 3P PE ~ 50Hz as standard. (Different electrical supply configuration options are available-On Request such as 480V, 3P PE ~ 60Hz. etc.)
- High efficiency, backward curved blade, statically and dynamically balanced fans are directly coupled to the motor.
- Standard air inlet is placed at right hand-side from front view. (Left hand-side air inlet available-On Request.)
- ΔP controlled automatic jet-pulse cleaning for cartridge filter elements (ideal cleaning pressure 4-5 bar which is regulated with built-in regulator) is activated when cleaning is necessary according to dust level on filter elements.
- Built-in air pressure regulator (0-10 bar). Drainage for pressured air tank.
- Standard AC-Filter Units are produced for indoor. On Request – Outdoor application including;
  - Additional water resistant cover for control panel with heater for cold climates or remote separated control panel.
  - Pre-painting preparation against corrosion with galvanized coating for steel parts.
  - UV and weather conditions resistant electrostatic polyester powder painting.

VANTERM Isı Ve Makina San. Tic. A.Ş.
GOSB 800. Sok. No:804 41480 Gebze/Kocaeli TURKEY
Tel:+90 262 751 05 94(Pbx) www.vanterm.com

VANTERM