BG-Series Mobile FILTER UNITS

Technical Specifications:

VANTERM

Passion for excellence in clean air solutions.



BG-1500 Filter Unit with HEPA 14 Filter Module

PLUG-n-PLAY
Ready to operate!

CE





MULTIPURPOSE USE

- BG – model mobile filter units are designed for filtration of dry dust, generated during various industrial operations (i.e. grinding, brushing, shaking, mixing etc.)
- BG filter unit is delivered as a ready-to-operate dust collector with cartridge and optional cassette filter elements, fully integrated fan, automatic reverse jet pulse filter cleaning system and control panel.
- BG – filter units can be used with VANTERM EK-2 type extraction arms or with duct connection, depending on the applied process.

ENERGY SAVING & FLEXIBILITY

- Low consumption of pressured-air with ΔP controlled automatic VANTERM K-type jet-pulse cleaning.
- With Dust Class-M standard cartridge filters, the filtered-clean air can be returned back to the workshop. This prevents heat loss and ensures environment friendly and healthy application.
- Depending on various industrial operations, BG – filter units can be equipped with optional Aluminum coated, ePTFE Teflon membrane, and Flame Retardant Polyester nonwoven filter elements, on request.
- On request, the separation degree is much more enhanced with optional HEPA 13 filter module.
- On request, BG-filter units can be equipped with activated carbon filter modules, to be used at processes where smoke and dust particles create odor and smell problems.
- The front side is enough for all maintenance and service needs. One side is for dust-laden air connection. The rest sides can be replaced anywhere. – Saves space on production ground.
- All Electrical Voltage and Frequency configurations (i.e. 480V 3P~60 hz.) are available, on request.

PERFECT FILTRATION & SAFETY

- High filtration efficiency with Dust Class: M certified (acc. to EN 60335-2-69) filter elements which arrests 0,2-2 micron particles with 99,9% efficiency.
- Average 10000-15000 working hour lifespan with effective reverse jet-pulse cleaning.
- Visual real-time dust level control of filter elements via colored manometer.
- Maximum operational safety with fully integrated control panel and internal electrical wiring.
- The light-weight fan impellers are made of aluminum, which ensures long motor life-time.
- High efficient, backward curved fans confirming ERP 2015 with G2.5 balance grade (static and dynamic) are direct coupled to motors.
- Dirty-air inlet part avoids particles from striking onto the filter elements and extends the filter life-time.


EASY MAINTENANCE

- The service access door and the control panel cover are all replaced on the front side of the filter unit.
- User-friendly, big dust tray with its 64 lt. high volume brings advantage for daily maintenance work.
- The stopper parts inside service door keep the dust tray always in its position- unaffected from the movements of the filter unit.
- The stopper parts inside service door keep the dust tray always in its position.




Easy Dust Tray with 64 liter big volume

Standart model
(w/o carbon-Hepa filter stages)

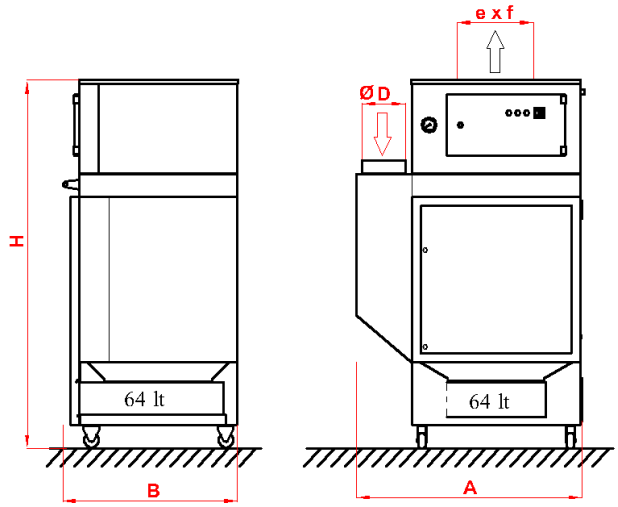

Optional model
(incl. carbon-Hepa filter stages)

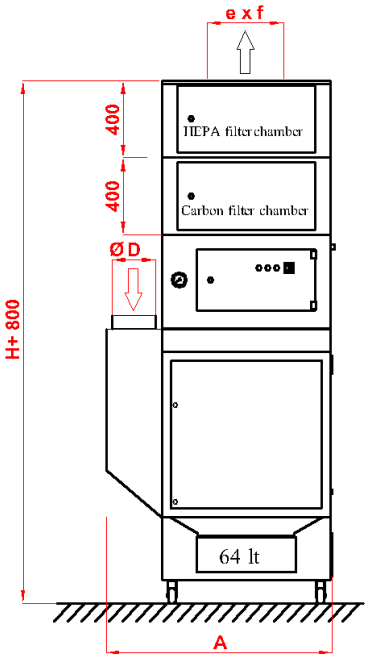

TYPE	CAPACITY (m^3/h)	FAN PRESSURE (Pa)	MOTOR (kW)	FILTER AREA (m^2)	exf (mm)	AxB (mm)	H (mm)	ØD (mm)	WEIGHT (kg)
BG-750	1500	2400	1,5	20	320x320	1180x940	1567	160	180
BG-1500	3000	2400	3,0	20	400x400	1180x940	1670	224	194
BG-3000	3000	2400	3,0	40	400x400	1180x940	1907	224	208

***Ongoing product development may subject the technical specifications to alteration without notice.**

- The motor is replaced inside the filter unit, to provide low sound level during operation.
- The filter unit can be easily equipped with HEPA filter chamber or Carbon filter chamber later after sales, on customer request.
- Easy maintenance for motor, fan and filter elements with the hinged front covers. User friendly front covers are simply locked or unlocked.
- In standart version, the cartridge filters are made of polyester non-woven. They arrest 0.2 - 2 micron particles with %99.9 efficiency. Dust Class M acc. to DIN EN 60335. Cartridge filters have a temperature resistance up to 80°C.
- The filter unit is equipped with automatic jet-pulse cleaning. Cleaning pressure is maximum 5 bar. The pressure regulator and the differential pressure gauge that starts-and-stops jet pulse cleaning automatically are standard.
- The pressure gauge near the control panel indicates the pressure loss across the filter cartridges.
- The dust tray (with 64 liter volume) is placed under the filter unit, in the leak-proof chamber.
- The clean air leaves the filter unit from the top, vertically. The outlet size is mentioned as (e x f) above. It is possible to connect a flange with (e x f) size over the filter unit, in order to connect the clean air to an exhaust duct.
- Optional Carbon filter cassette inside the carbon filter chamber.
- Optional HEPA filter inside the HEPA chamber.
- Any three phase power supply (voltage and frequency) configuration is available, on request. (i.e. 480V – 60 Hz.)

VANTERM Isı Ve Makina San. Tic. A.Ş.
GOSB 800. Sok. No:804 41480 Gebze/Kocaeli TURKEY
Tel:+90 262 751 05 94(Pbx) www.vanterm.com

VANTERM