
EK-2 Type High Efficiency Extraction Arm Technical Specifications



EK-2 Exo Joint High Efficiency Extraction Arm (5-Axis Motion)

- EK-2 type extraction arms are designed for extraction of fumes and dusty in general industrial environment.
- EK-2 type extractions arm are high efficiency Low pressure drop arms with external joints and straight duct sections which is 56% more energy efficient.
- Extraction arm can be brought easily into any desired position and will stay in equilibrium as self-supporting.
- Flanged Funnel type aluminum hood has high extraction performance and is durable to sparks and external forces.
- As standard all joints hoses (PAA) are special alloy polyurethane high durability to wear and sparks and flame retardant acc. to DIN4102-B1 standard.
- As standard all arms are equipped with Multi angle valve. Wall connection part is also included in standard delivery.
- 5-axis motion capability
- 2-axis 180° motion capability at the hood.
- Optional antistatic (AS) hose acc. to DIN 53486 standard (R<10^{8} ohm).

Easy Maintenance and Low Pressure drop with External-Joint Mechanism

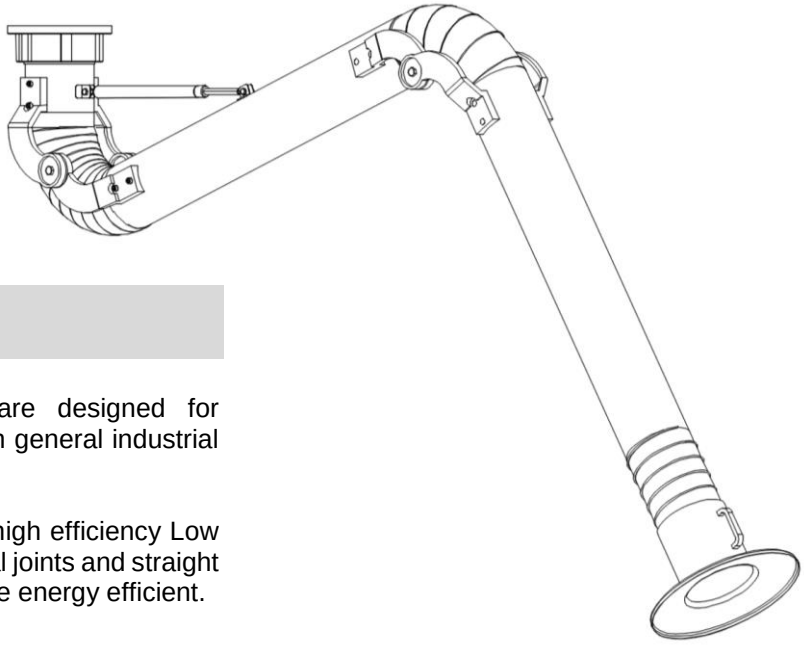


High Performance Flanged 2-axis Motion Hood

TYPE	CAPACITY (m^3/h)	L (m)	DIAMETER (mm)	PRESSURE DROP (Pa)	WEIGHT *** (kg)
EK-2.2.D	1 000-1200	2	Ø160	420-600	21,5
EK-2.3.D	1 000-1200	3	Ø160	420-600	23
EK-2.4.D	1 000-1200	4	Ø160	420-600	24,5

*** The weight of wall connection part (4,5kg) is included.


VANTERM Isı Ve Makina San. Tic. A.Ş.
GOSB 800. Sok. No:804 41480 Gebze/Kocaeli TURKEY
Tel:+90 262 751 05 94(Pbx) www.vanterm.com

EK-2 Extraction Arm Performance Curve

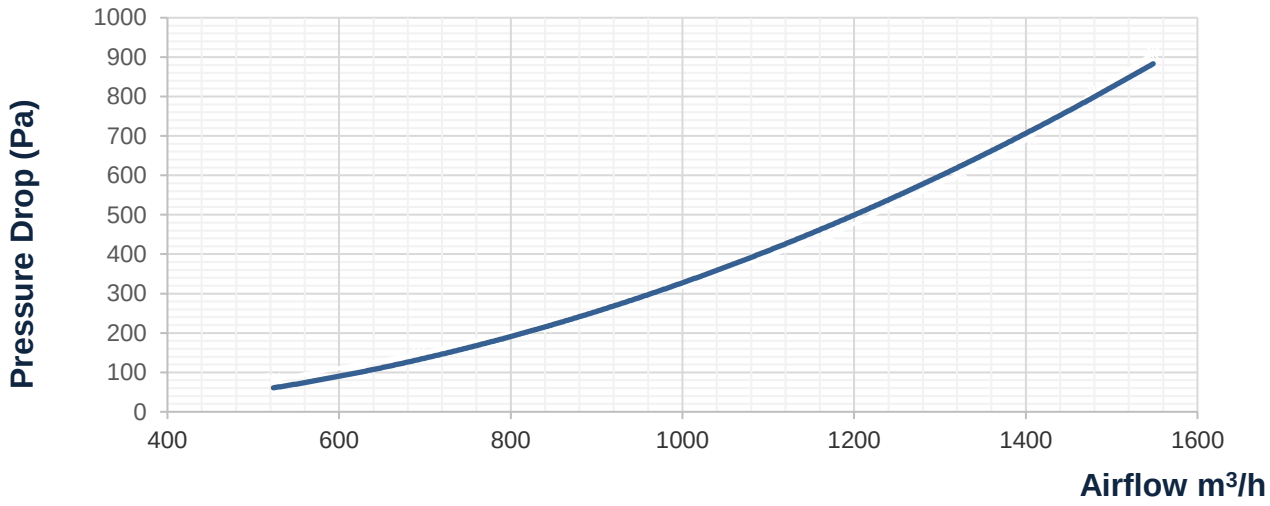


*Pressure Drop curve is for 135-90-135° degree positioning. Actual pressure drop may differ.


MODEL: EK-2.2.D

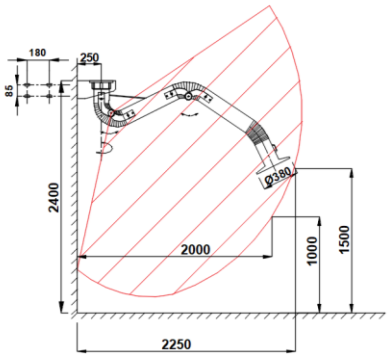



MODEL: EK-2.3.D

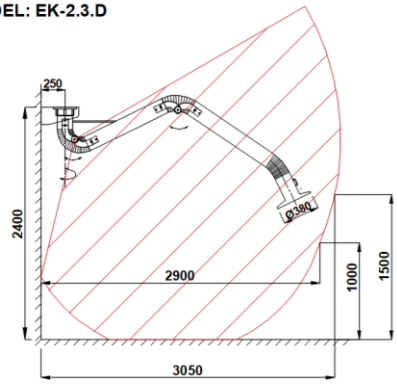

MODEL: EK-2.4.D

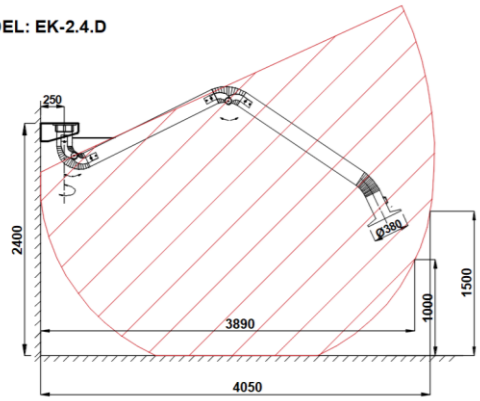

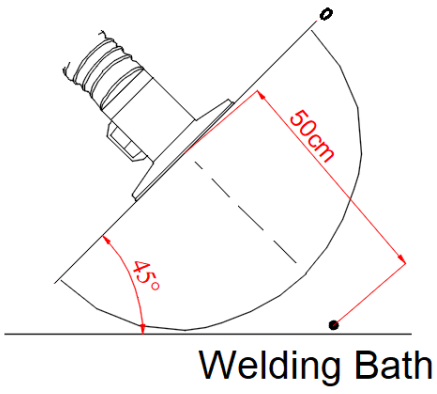

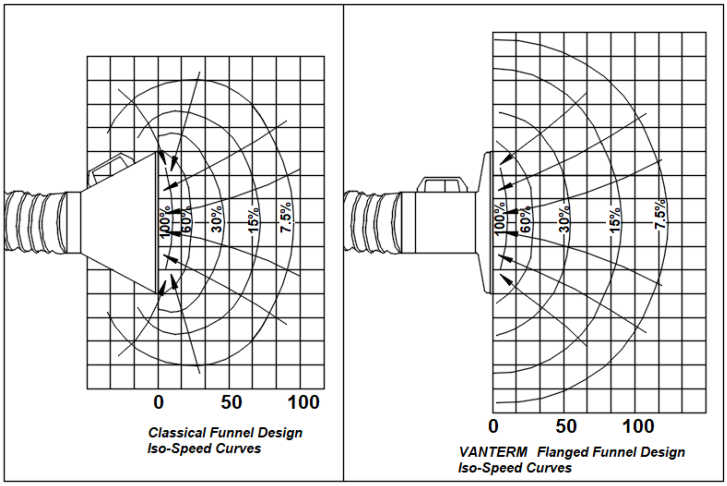

VANTERM Isı Ve Makina San. Tic. A.Ş.
GOSB 800. Sok. No:804 41480 Gebze/Kocaeli TURKEY
Tel:+90 262 751 05 94(Pbx) www.vanterm.com

VANTERM