KAB-Vortex FILTER UNITS
Technical Specifications

VANTERM
Passion for excellence in clean air solutions.



M | DIN EN 60335-2-69 Dust Class M 0,2-2 µm %99,9 | M

H13 | EN 1822 Hepa 13 certified 0,12 µm %99,997

CE

PLUG-n-PLAY
Ready to operate!

KAB-VORTEX Filter Unit

Power Control and Saving With Automatic PID Pressure Transmitter Controlled VFD

WELDING FUME CONTROL

- Specifically designed for General Indoor Welding Ventilation applications up to 15000m^3/h with very small foot print area.
- Ready-to-operate with filters, integrated fan, control panel and automatic jet pulse filter cleaning system.
- Availability of placing filter unit adjacent to corners and walls – Saves space with built-in rear sided diffuser inlet.

SAFETY- DURABILITY


- High filtration efficiency with Dust Class: M certified (acc. to EN 60335-2-69) ePTFE membrane filter elements which arrests 0,2-2 micron particles with 99,9% efficiency.
- HEPA13 Police Filters Ensures Indoor Air Quality Safety even in the case of Faulty filters.
- Dedusting Class W3 certification according to EN ISO 15012-1 is in progress.
- OPTIONAL-Standard Polyester, Aluminum coated, Flame Retardant ePTFE membrane Polyester nonwoven filter elements are available.
- Ave. 10000-15000 working hour lifespan with specially designed filter cartridges, effective jet pulse cleaning and inlet diffuser which ensures impact-free entrance.
- Maximum operational safety with fully integrated control panel and internal electrical wiring.
- Aluminum fan rotors with low weight and inertia ensure longer electrical motor life-span. All fans confirming ERP 2015 with G6.3 balance grade (static and dynamic).


EASY MAINTENANCE


- Easy access doors to every component.
- Unique dust bin locking mechanism, dust bins are unlocked, offloaded and replaced in matter of seconds.

ENERGY SAVING - AUTOMATION

- With Dust Class M filters and HEPA13 Police Filters filtered-clean air recycled to the plant environment prevents heat loss and ensures environment friendly and healthy application.
- Low consumption of pressured-air with ΔP controlled automatic VANTERM K-type solo jet-pulse cleaning.
- As standard slave mod available, automatic start and stop synchronous with the related parent process.
- All Electrical Voltage and Frequency configurations (ex.480V 3P~60 hz.) are available with automation and power control implemented via worldwide available components.
- STANDARD-Automatic PID control with pressure transmitter regulated VFD (Variable Frequency Drive) for fan speed control ensures energy saving with optimum performance.
- OPTIONAL - Low air flow output signal and alarm ensure hands-on approach for performance observation, process safety and maintenance.

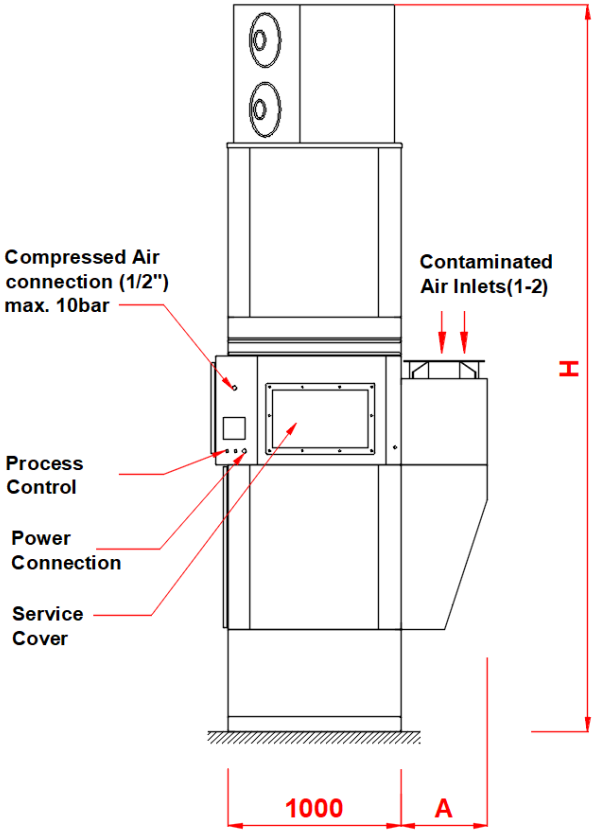

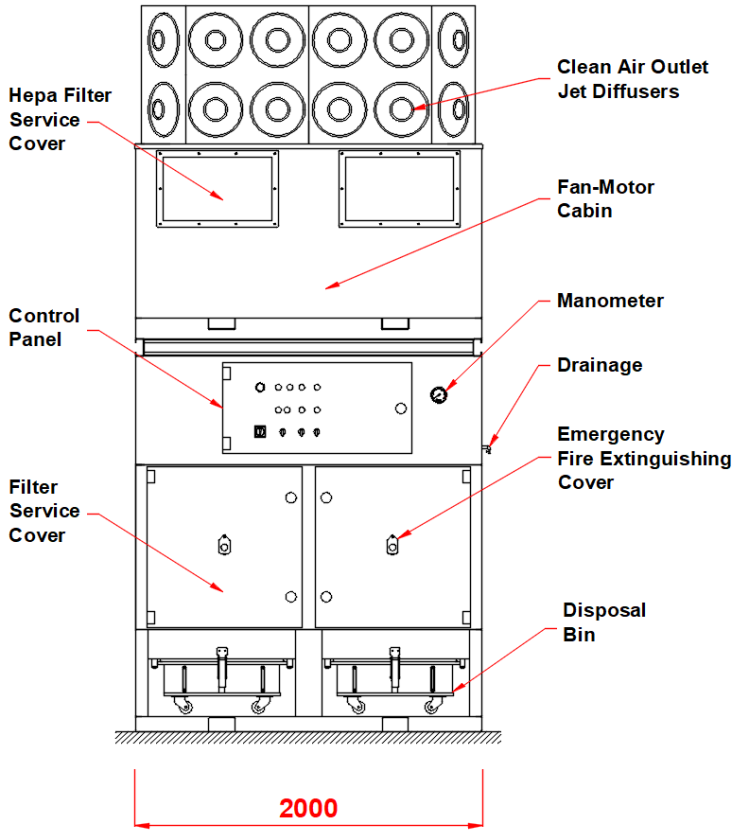

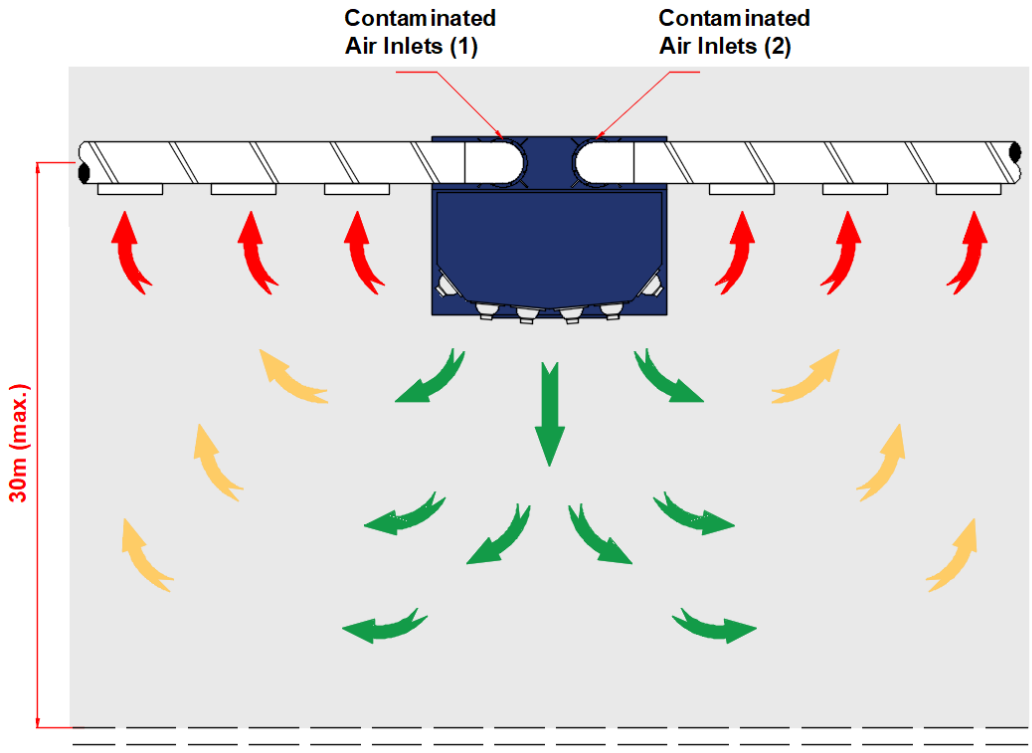

TYPE	CAPACITY max.(m^3/h)	FAN PRESSURE (Pa)	MOTOR (kW)	AxH (mm)	FILTER SURFACE (m^2)	Dust Bin (liter)	ØD (mm)	WEIGHT (kg.)
KAB-Vortex	10000	3000	11,0	455x4225	84	2x120	355x2	1500
KAB-Vortex Max	15000	3000	15,0	555x4525	126	2x120	400x2	1700

*Ongoing product development may subject the technical specifications to alteration without notice.

VANTERM Isı Ve Makina San. Tic. A.Ş.
GOSB 800. Sok. No:804 41480 Gebze/Kocaeli TURKEY
Tel:+90 262 751 05 94(Pbx) www.vanterm.com

VANTERM