M-Series Mobile FILTER UNITS

Technical Specifications:

VANTERM
Passion for excellence in clean air solutions.



M-1000 Filter Unit with EK-2 Extraction Arm

H13 EN 1822 Hepa 14 certified 0,1-0,3µm %99,95

PLUG-n-PLAY
Ready to operate!

CE

MULTIPURPOSE USE

- M – model mobile filter units are designed as an indoor filtration solution for industrial processes, generating smoke and fume, with smell – odor problems.
- M – filter units can be used with VANTERM EK-2 type extraction arms or with duct connection, depending on the applied process.

PERFECT FILTRATION & FLEXIBILITY

- M filter unit is delivered as a ready-to-operate dust collector with cassette filter elements inside, fully integrated fan, and control box.
- There are 2 stages of filtration in standard M – model filter units: First stage is particle filtration with G4 Class filter cassettes according to EN 779. The second stage is the active carbon filter cassette, which is used for removal of gas-phase contaminations.
- Depending on various industrial operations, M – filter units can be equipped, as a third filtration stage, with optional HEPA 13 or HEPA 14 filter modules, to improve its filtration degree, on request.
- The front side is enough for all maintenance and service needs. The contaminated air-inlet is on the top of the filter unit. So M-filter unit with its compact design saves space on production ground.
- All Electrical Voltage and Frequency configurations (i.e. 480V 3P~60 hz.) are available, on request.

SAFETY

- Average 6000-10000 working hour lifespan depending on the concentration level of the gas-phase contaminations.
- Maximum operational safety with IP65 control box acc. IEC 60529 standard and internal electrical wiring.
- The light-weight fan impellers are made of aluminum, which ensures long motor life-time.
- High efficient, backward curved fans confirming ERP 2015 with G2.5 balance grade (static and dynamic) are direct coupled to motors.
- Clean-air outlet is replaced on the top of the filter unit, to provide a comfortable indoor environment for the workers around the filter unit. .



Arm-hood made of aluminum & High capturing efficiency


MAINTENANCE

- The service access doors for each filter stages and the control box are all replaced on the front side of the filter unit.
- The filter elements used in M –model filter units, are Use-And-Throw-Away type filter cassettes. The filter elements must be replaced with new ones, after their life-time end.




IP65 Control Box

Without hepa

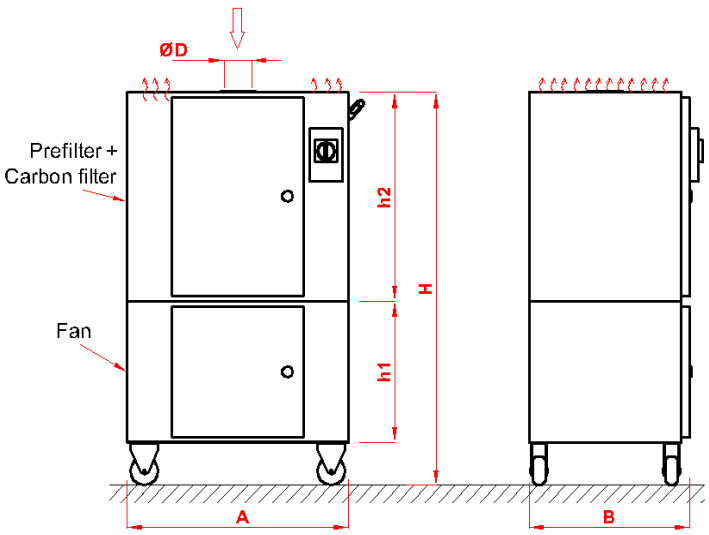

With hepa

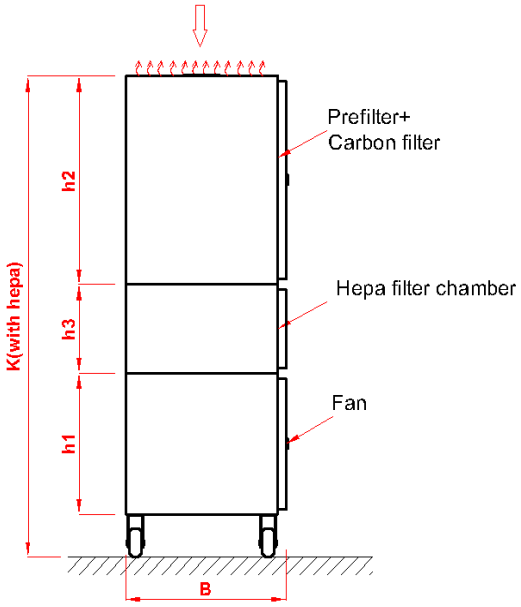

TYPE	CAPACITY (m^3/h)	FAN PRESSURE (Pa)	MOTOR (kW)	NOISE LEVEL* dB(A)	AxB (mm)	H (mm)	K (mm)	ØD (mm)	WEIGHT** (kg)
M-500	500	2400	0,75	64	690x465	1119	1375	125	77
M-1000	1000	2800	1,1	65	750x725	1128	1528	160	132
M-2000	2000	2600	2,2	68	1055x725	1155	1555	200	160

***Noise level measured 1,0 meter away from the filter unit.**

****Weight without HEPA filter module.**

*****Ongoing product development may subject the technical specifications to alteration without notice.**

- Easy to access filter stages and fan chamber through hinged front covers. User friendly front covers are simply locked and unlocked.
- User-friendly and leak-proof assembly on each filter stage.
- Optional HEPA (H13 or H14) filter module can be also mounted on the filter unit and provides %100 leak-proof assembly. All models can be easily equipped with HEPA filter module later after sales, on customer request.
- The clean air leaves the filter unit from the top, vertically.
- The motor control is made simply via motor protection switch, providing high safety.
- Any three phase power supply (voltage and frequency) configuration is available, on request. (i.e. 480V – 60 Hz.)

VANTERM Isı Ve Makina San. Tic. A.Ş.
GOSB 800. Sok. No:804 41480 Gebze/Kocaeli TURKEY
Tel:+90 262 751 05 94(Pbx) www.vanterm.com