
PM-MOBILE WELDING FILTER UNIT

PM-801 and PM-802 Technical Specifications:




PM-801 Mobile Filter Unit
EN ISO 15012-1
IFA-DGUV W3 Certified



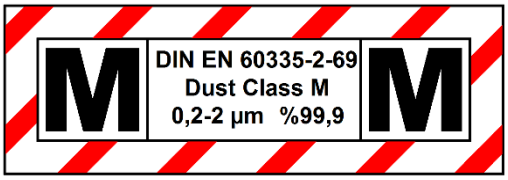

W3 Certification No: IFA 1205041

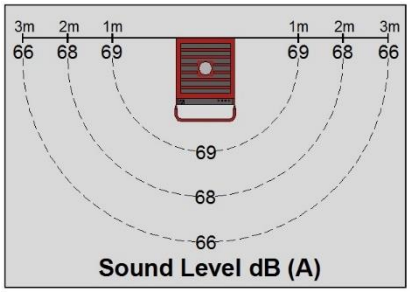

EXCLUSIVE

- Specially designed for extraction and filtration of welding fumes and emissions.
- Ready-to-operate with filters and integrated fan as a single compact unit.
- PM-801 (single arm) and PM-802 (double arm) models selection is possible. PM-802(double arm) creates flexible work environment for two welders.
- With its wheels, mobile units can be positioned anywhere on plant floor. With small foot print, they only need a small area on the floor.
- Low Sound Level ≤ 69dB(A) with statically and dynamically balanced (Balance Grade G2.5) fan and silencer.

INTERNATIONALLY CERTIFIED

- PM-801 is granted ***W3 certificate*** by ***IFA-DGUV*** according to ***EN ISO15012-1 "Health and safety in welding and allied processes"*** standard. W3 certificate ensures that it is safe to recycle filtered air even the welded parts are high alloy steels with Nickel and Chromium.

ENERGY SAVING

- ***With IFA-DGUV W3*** certificate, the filtered and recycled air prevents heat loss and ensures environment friendly and healthy application.
- Filter dirtiness level is measured through ΔP controlled sensor continuously. The sensor signals only when maintenance is necessary.

SAFETY

- High filtration efficiency with ePTFE membrane polyester non-woven filter media. Dust Class: M (acc. to EN 60335-2-69 standard) which arrests 0,2-2 micron particles with 99,9% efficiency. ASHRAE equivalent is MERV 15-16.
- Flexible hoses on the extraction arm, are flame retardant acc. to DIN 4102-B1 standard and resistant to wear, bacteria and hydrolysis.
- Metal mesh pre filter minimizes the fire risk due to sparks.
- Maximum operational safety with internal electrical wiring and fully integrated control panel including thermic switch, ΔP pressure sensor for filters and fan rotational direction sensor.
- With continuous measuring ΔP pressure sensor, Filter dirtiness level is measured constantly and warns operator before risk to operator's safety.


DURABILITY

- Cartridge pleated ePTFE (membrane polyester non-woven filters have long lifespan - average 6000-10000 working hours according to work conditions.
- Optional Oil-mist prefilter extends Main cartridge filter lifespan, if oily parts are welded.
- As standard, aluminum fans with low weight and inertia ensure high electrical motor lifespan.


EASY MAINTENANCE

- Easy access and service to every component with access doors.
- Fast maintenance with easy-to-use dust drawer.
- Filter manual cleaning is performed easily with pressured air pistol from clean air side without removing cartridge filters.

PM-801 Mobile Filter Unit

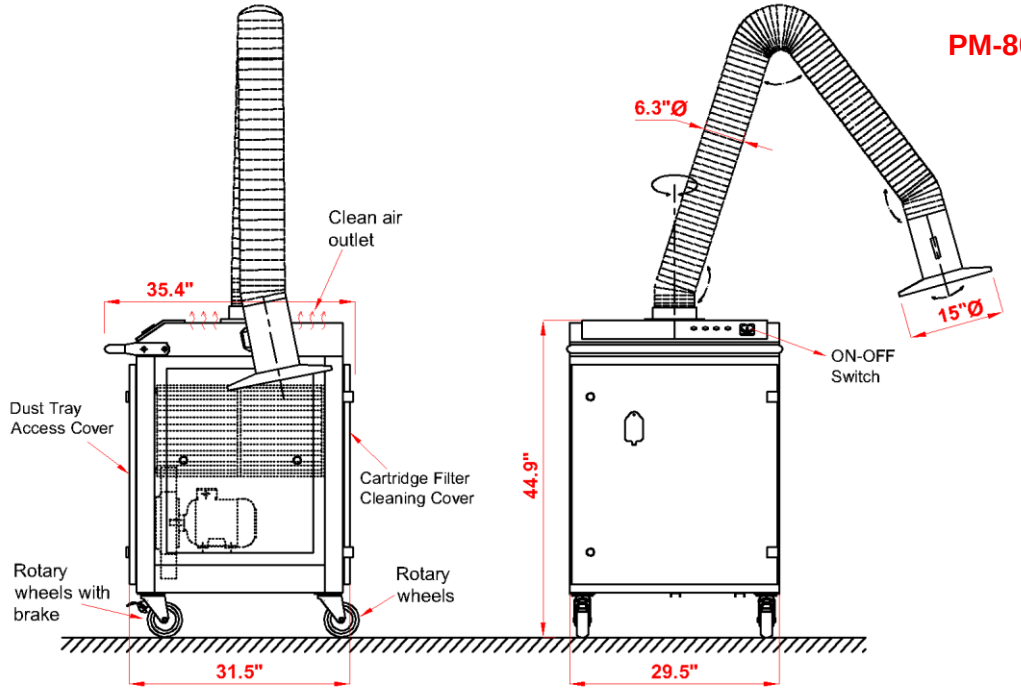

PM-802 Mobile Filter Unit

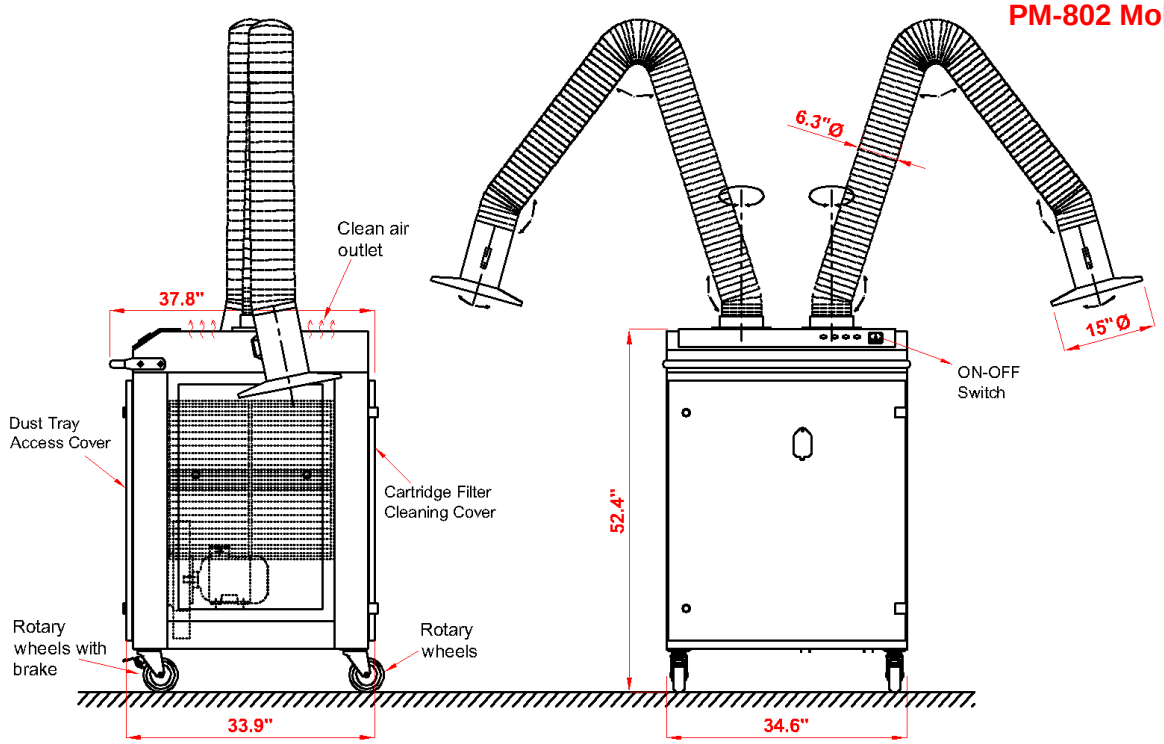

Model	Capacity	Motor	Filter Area	Number of Filter	Weight (without arms)
PM-801	707 CFM	2,0 HP	108 ft^2	1 Pcs	230 lbs.
PM-802	1414 CFM	4,0 HP	216 ft^2	2 Pcs	291 lbs.

- PM-Mobile filter units are ready-to-use compact filter units with filter, motor-fan and extraction arms.
- 10 meter electrical cable length is standard with Motor thermic protection switch, faulty motor signal, fan rotational direction sensor and ΔP filter dirtiness sensor and signal.
  (480V, 3P N PE ~ 60Hz Electrical Voltage – Other Voltage specifications are optional.)
- As standard, high efficient, backward curved, and directly coupled fans made of aluminum, are statically and dynamically balanced (G2.5).
- Filter dirtiness level is measured continuously and warns operator when maintenance is necessary.
- Extraction arm length can be chosen as 2m. (79 in.), 3m. (118 in.) or 4m. (158 in.) as standard.

VANTERM Isı Ve Makina San. Tic. A.Ş.
GOSB 800. Sok. No:804 41480 Gebze/Kocaeli TURKEY
Tel:+90 262 751 05 94(Pbx) www.vanterm.com

VANTERM