SM-Series FILTER UNITS
Technical Specifications:

VANTERM
Passion for excellence in clean air solutions.



PLUG-n-PLAY
Ready to operate!

M | DIN EN 60335-2-69 Dust Class M 0,2-2 µm %99,9 | M

H14 | EN 1822 Hepa 14 certified 0,12 µm %99,997

SM-2200 Filter Unit with Active Carbon Module

Power Control with Standart Control Panel

INTENDED USE

- SM – Series filter units are designed for dedusting of dry dust, generated during various industrial operations (i.e. welding, mixing etc.)
- SM filter unit is delivered as a ready-to-operate dust collector with cartridge and optional cassette filter elements, fully integrated fan, automatic reverse jet pulse filter cleaning system and control panel.
- Comfortable use thanks to its Low Sound Level ≤70 dB(A) depending on model.

ENERGY & SPACE SAVING -

- With Dust Class M standard cartridge filters, the filtered-clean air can be returned back to the workshop. This prevents heat loss and ensures environment friendly and healthy application.
- On request, the separation degree is much more enhanced with optional HEPA 13 or HEPA 14 filter cassettes.
- On request, SM-filter units can be equipped with activated carbon filter modules, to be used at processes where smoke and dust particles create odor and smell problems.
- Low consumption of pressured-air with ΔP controlled automatic VANTERM K-type jet-pulse cleaning.
- The front side is enough for all maintenance and service needs. One side is for dust-laden air connection. The rest sides can be replaced anywhere. So placing SM filter unit adjacent to corners and walls is possible. – Saves space on production ground.
- As standard slave mode available: Automatic start and stop synchronous with the related parent process.
- All Electrical Voltage and Frequency configurations (ex.480V 3P~60 hz.) are available with automation and power control implemented via worldwide available components.
- OPTIONAL-Automatic PID control with pressure transmitter regulated VFD (Variable Frequency Drive) for fan speed control ensures energy saving with optimum performance.

SAFETY- DURABILITY - FLEXIBILITY

- High filtration efficiency with Dust Class: M certified (acc. to EN 60335-2-69) filter elements which arrests 0,2-2 micron particles with 99,9% efficiency.
- Maximum operational safety with fully integrated control panel and internal electrical wiring.
- Visual real-time dust level control of filter elements via colored manometer.
- Depending on various industrial operations, SM – filter units can be equipped with optional Aluminum coated, ePTFE Teflon membrane, Flame Retardant Polyester and Stainless steel construction Propylene nonwoven filter elements, on request.
- Average 10000-15000 working hour lifespan with effective reverse jet pulse cleaning.
- The light-weight fan impellers are made of aluminum, which ensures long motor life-time.
- High efficient, backward curved fans confirming ERP 2015 with G2.5 balance grade (static and dynamic) are direct coupled to motors.

EASY MAINTENANCE


- Easy access doors to every component solely from the front side of the filter unit.
- User friendly dust bin locking mechanism, dust bins are unlocked, offloaded and replaced in matter of seconds.
- High volume dust disposal bin brings advantage for daily maintenance work.



Easy Dust Bin Mechanism & Big Volume Dust Bin



User-friendly Control Panel

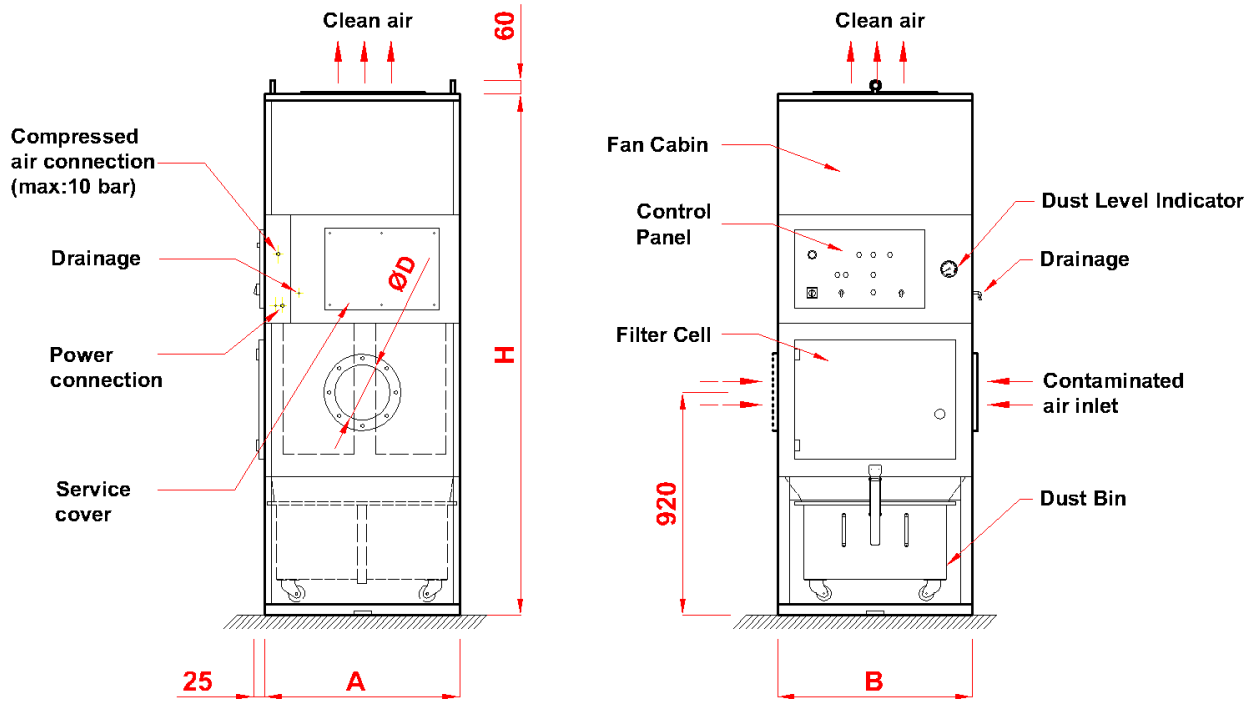

TYPE	CAPACITY (m^3/h)	FAN PRESSURE (Pa)	MOTOR (kW)	FILTER AREA (m^2)	DUST BIN (lt)	AxB (mm)	H (mm)	ØD (mm)	WEIGHT (kg)
SM-1500	1500	2300	1,5	20	100	650x800	2138	160	211
SM-2200	2200	2300	2,2	30	130	840x800	2156	200	242
SM-3000	3000	2300	3,0	40	130	840x800	2200	250	258

***Ongoing product development may subject the technical specifications to alteration without notice.**

- SM-Filter units are fully assembled with its filters, fan and motor, automatic cleaning system and control panel which are ready to operate.
- High efficiency fans, which are made of aluminum are backward curved and directly coupled to the motor.
- In standart version, the cartridge filters are made of polyester non-woven. They arrest 0.2 - 2 micron particles with %99.9 efficiency. Dust Class M acc. to DIN EN 60335. Cartridge filters have a temperature resistance up to 80°C.
- Fully automatic (Jet-pulse) filter cleaning system with pressured air (4-5 bar). Dust level on the filters is constantly measured with differential pressure gauge. Cleaning cycle is activated through the VANTERM K-type jet-pulse cleaning system, only when it is necessary in order to ensure electrical efficiency and greener application.
- Control panel that start-and-stop jet pulse cleaning automatically are standard on SM- filter units. Dust level indicator of filter elements for operators and pressured-air regulator (max.10 bar) for cleaning system are also included in the control panel.
- High volume dust bin with wheels.
- Made of carbon steel with electrostatic powder painting for indoor applications.
- Right or Left hand-side contaminated air inlet.
- Any three phase power supply (voltage and frequency) configuration is available, on request. (i.e. 480V – 60 Hz.)

VANTERM Isı Ve Makina San. Tic. A.Ş.
GOSB 800. Sok. No:804 41480 Gebze/Kocaeli TURKEY
Tel:+90 262 751 05 94(Pbx) www.vanterm.com