
VR-108 Exhaust Fan
Technical Specifications

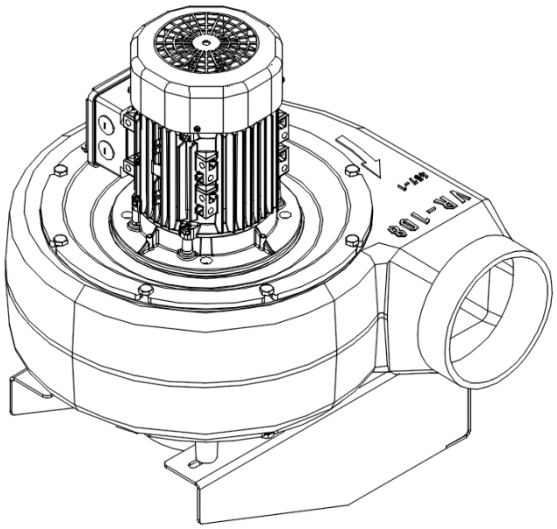

VR-108 (With Wall mounting support)
***Standart in clock-wise rotation**
****Optional as counter-clockwise rotation**


*****Optional with a mobile carriage**


VR-108 Exhaust Fan

- Mostly used for extraction of welding smoke and dust. Very easy to assemble on a wall.
- VR-108 exhaust fan can be used together with EK-2 type extraction arm, which provides high efficiency-low pressure drop, thanks to the external joints and its straight duct sections.
- When used with EK-2 type arms, VR-108 fan outlet must be connected to exhaust ducting.
- OPTION: When used with ECO:D wall-mounted filter unit, VR-108 fan can return the filtered-air back into the hall.
- One VR-108 exhaust fan must be used for each EK-2 type extraction arm.
- The following standart parts are delivered together with VR-108 exhaust fan:
  - Flame-retardant polyurethane Inlet and Outlet adaptor parts with heigh resistance against abrasion and wear. (Length: 500mm)
  - 4 pcs. Ø160 clamps, required for adaptor part assembly.
  - Motor: IE3 Efficiency - 1,1kW 400V 50hz ~3P N PE
  - High-efficient, Back-curved fan Wheel made of Aluminium (balance quality: G6,3)
  - Wall mounting support part.
  - IP65 Motor starter including protective switch.

Model	Motor	Nominal Capacity	Max. Capacity	Max. Pressure	Weight (w/o arm)
VR-108	1,1kW -3000rpm	1300 m^3/h	1950 m^3/h	1500 Pa	30 kg

VANTERM Isı Ve Makina San. Tic. A.Ş.
GOSB 800. Sok. No:804 41480 Gebze/Kocaeli TURKEY
Tel:+90 262 751 05 94(Pbx) www.vanterm.com

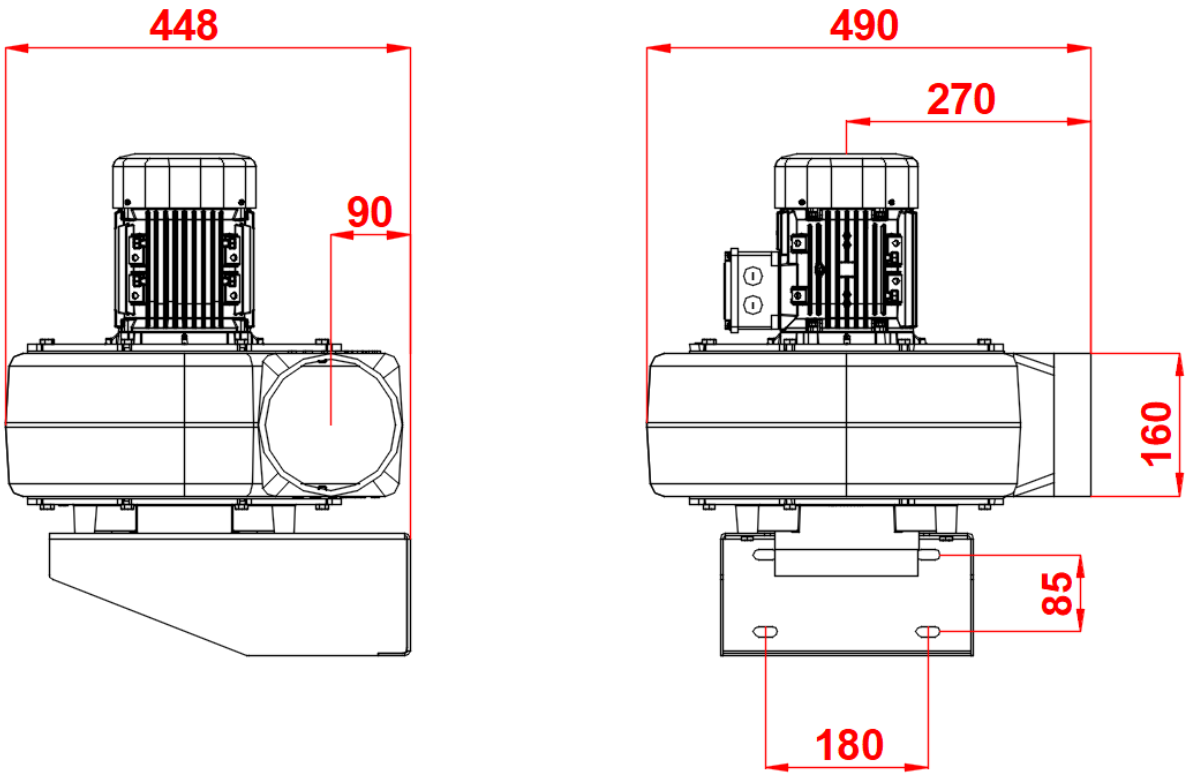

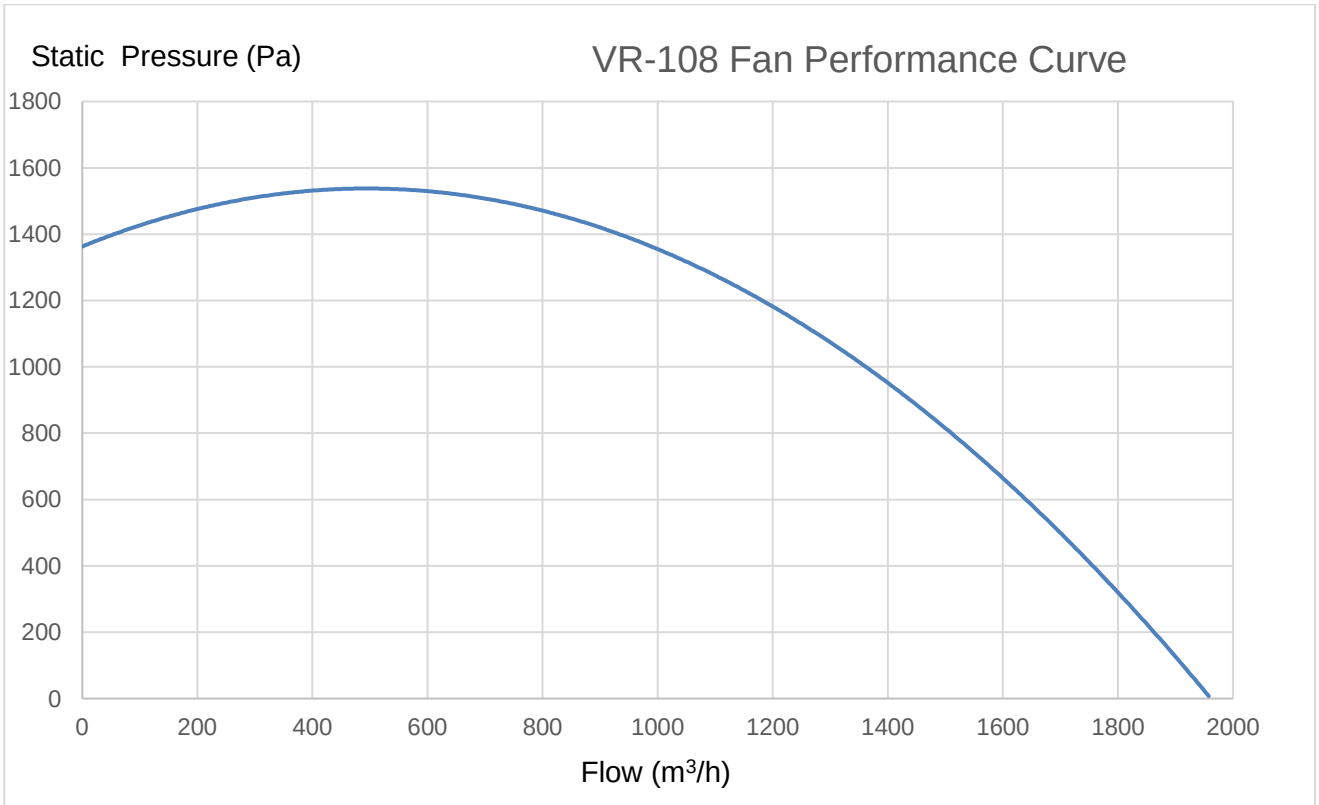

VANTERM Isı Ve Makina San. Tic. A.Ş.
GOSB 800. Sok. No:804 41480 Gebze/Kocaeli TURKEY
Tel:+90 262 751 05 94(Pbx) www.vanterm.com