Godrej
Unlock Smarter Living
5 year comprehensive warranty worth ₹ 7,990/- free
No Hidden Costs*
No Gas Refill Charges
No Remote Replacement Charges
No Technician Charges
*TnC apply: http://bit.ly/GATnC_

Trusted appliances since 1958

At Godrej, thoughtful innovation shapes everything we make. Guided by integrity, respect, customer centricity, entrepreneurship, trust and environmental stewardship, our appliances have been designed to be loved by India since 1958.

Godrej Air Conditioners

Godrej entered the air conditioning space in 1997 with a simple belief: great cooling should be efficient and responsible. Backed by over 25 years of expertise, our air conditioners are engineered for optimal performance, lower power consumption and greater environmental care. Innovation for today, with tomorrow in mind.

1997

Launch of Godrej Air Conditioners

2010

Agreement with the Ministry of Environment for the development of hydrocarbon refrigerant

2011

R290 REFRIGERANT

Launched R290 refrigerant

2012

Launched Green Balance AC with 3.7 EER*

2013

INDIA DESIGN MARK awarded in 2013

Awarded the India Design Mark Award

2015

National Energy Conservation Award BEE, the Ministry of Power, Government of India

2016

National Energy Conservation Award BEE, Ministry of Power, Government of India

2019

Finalist, Global Cooling Prize, Rocky Mountain Institute in association with Ministry of Science and Technology, Government of India

2023

Launched India's first leakproof Split Air Conditioners with Anti-Leak technology

2024

Introduced nature-inspired wood-finish Air Conditioners

2025

Expanded into commercial ACs

*TnC apply: http://bit.ly/GATnC_

SmartSync Technology

Familiar with the challenge of having to get up multiple times in the middle of the night to switch between your AC and fan? Godrej's SmartSync technology addresses this concern to deliver uninterrupted sleep and perfect comfort.

The Eon - Quess series is equipped with SmartSync Technology - an advanced solution that enables it to synchronise with your fan and optimise your comfort, without any manual intervention from your side to switch on or switch off the fan.

A smartly designed integrator connects the fan to the AC and enables the AC to communicate wirelessly with the fan. When the room temperature drops below the set temprature and it starts becoming too cold the AC switches off its cooling and turns the fan on. When the room temperature starts climbing up and the room starts feeling hot, the AC switches on its cooling mode and turns the fan off. This coordinated operation ensures you get perfect cooling and uninterupted sleep!

Voice-enabled Operation

Your voice is your AC's command. Manage your Smart AC effortlessly and stay in control of your cooling. Just say the word.

App-enabled Operation

Your AC is always within reach. Control, customise and monitor your cooling from anywhere through the Godrej Smart Life app.

Energy Monitoring

Save your energy and your AC's! Track your Smart AC's energy usage through the app to manage electricity bills efficiently without any worries.

Automated Filter Cleaning Reminders

One less thing to remember. Get timely notifications to clean the filter for efficient and uninterrupted cooling performance of your Smart AC.





Smart Scheduler

Comfort on your schedule. Set your Smart AC to turn on and off at preferred times and temperatures for hands-free, effortless cooling without uttering a word or lifting a finger.

Comfort Flow Technology

Powerful or gentle, whatever your cooling preference, there's a mode for you. If you like a stronger blast, go for our regular mode. However, if you want gentler airflow, there's the Comfort Flow mode that diffuses air across the room, creating a calm, still-air environment.

Enjoy most of draft-free comfort and consistent cooling for your bedrooms and living spaces. No more hot and cold spots, thanks to the even air distribution throughout your room. Enjoy peace and quiet for comfortable sleep.

Heavy-duty Cooling
Built for Indian summers

When temperatures soar beyond 45°C, many ACs struggle. Godrej air conditioners are tested to cool efficiently even at 52°C, so you stay comfortable through peak summer heat.

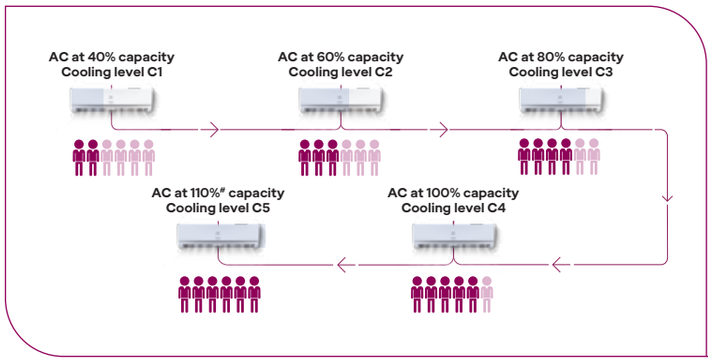

5-in-1 Convertible Technology
Up to 70% power savings* now in your hands

This technology allows the user to choose between five cooling capacity levels based on the cooling and comfort requirements. Based on the number of people in the room, the mode can be changed. Now, the efficiency of your air conditioner is on your fingertips.

4-way Swing
Cooling that reaches every corner

The AC louvres move both vertically and horizontally, ensuring uniform, powerful cooling across the room for a more efficient and comfortable experience, beneficial in peak summers.

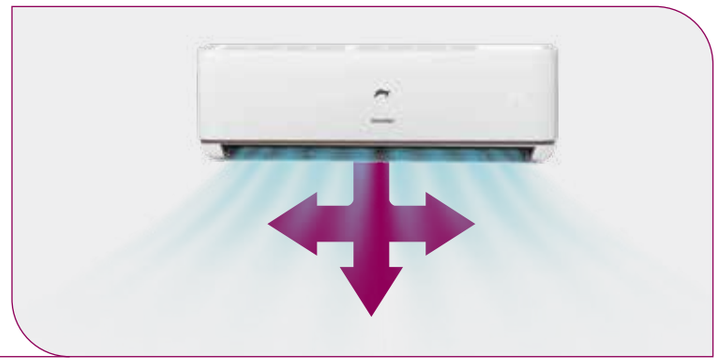

AI Powered i-Sense Technology
Your personal cooling assistant

Powered by AI, this technology senses the ambient temperature around you and automatically adjusts the cooling controls to offer precise and comfortable cooling, right where you are.

Anti-Leak Technology
No leaks, no worries

Up to 85% AC customers face AC leakage in their AC indoor unit, at least once in their product's lifetime (internal estimates). With the patented Anti-Leak Technology, Godrej ACs prevent indoor water leakage. Enjoy cooling without worrying about damage to walls, belongings, or electricals.

Anti-Freeze Technology
Protection at critical moments

A sensor on the evaporator coil detects ice formation and automatically cuts off the compressor, preventing damage and ensuring reliable performance.

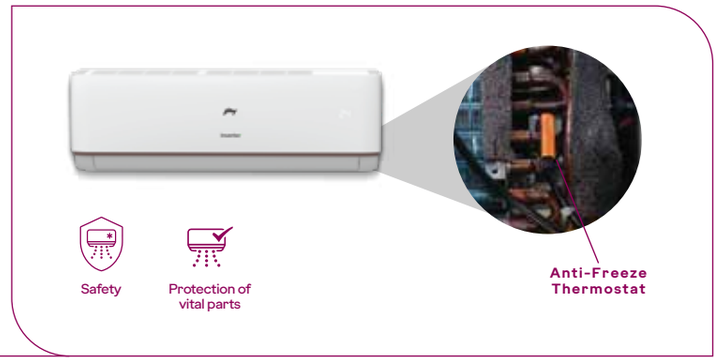

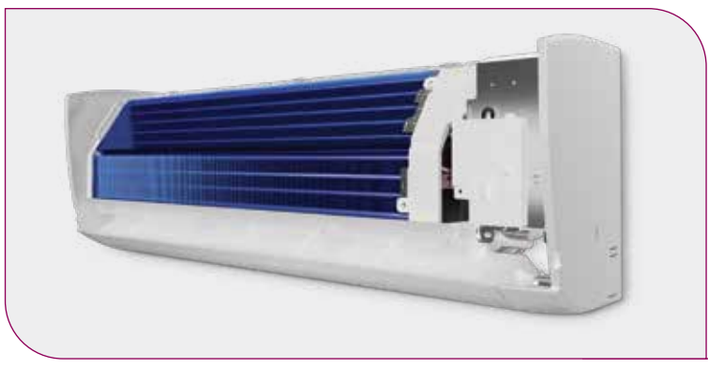

Blue Fin Anti-Corrosive Copper Evaporator

To prevent rust on evaporator coils, Godrej air conditioner's evaporators come with a special twin side blue fin anti-corrosive coating which protects it from rust and corrosion caused by water condensation. This supports heavy duty operations by ensuring durability, consistent cooling and reduces maintenance and repair costs.

Robust and efficient coils

Grooved copper coils improve heat dissipation and enhance structural strength, allowing them to with stand high pressure for longer, more efficient operation.

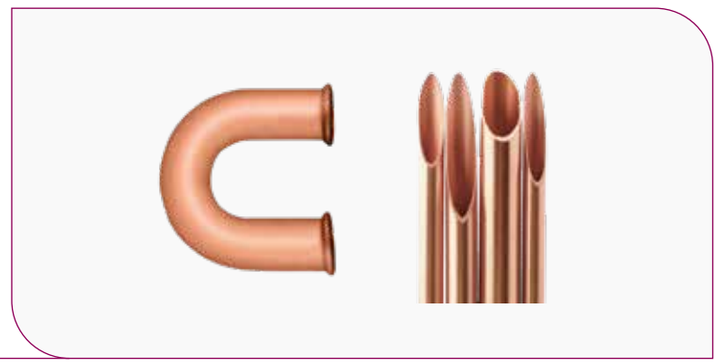

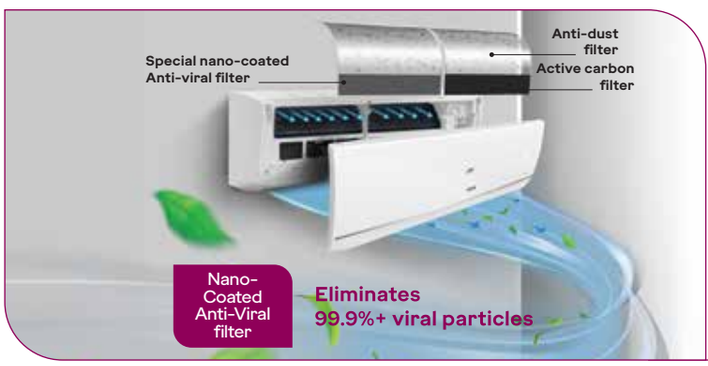

Tri-filtration with Nano-Coated Anti-Viral Filter
Breathe easy

The tri-filter air purification system in Godrej ACs ensures that the air in your home is 99.9% free from bacteria, airborne pathogens, dust particles, odour and hair. A special anti-viral nano-coated filter offers 99.9% virus sterilisation. Its active carbon filter and anti-dust filter block small carbon contaminants and trap airborne dust pollen and spores, improving the air quality.
This is particularly beneficial for kids and adults suffering from frequently cold cough and other respiratory problems like asthma. It also helps your AC last longer and work more efficiently.

5 year Comprehensive Warranty worth ₹7990 free*

No hidden costs

	Regular Brands	Godrej
2 chargeable annual preventive maintenance services after 1 year	Mandatory	Optional
Gas charging after 1 year	Chargeable	Issues arising out of gas charging are resolved completely free of cost even after 1 year
Remote replacement	Chargeable	Free*
Consumables (e.g. fan blade and other plastic parts)	Chargeable	Free replacement*
Labour charges	Labour charges are mandatory	No labour charges are taken for visits, repairs and re-installation#

*Subject to warranty registration or installation through Godrej SmartCare after sales service. Applicable on all split AC and 5 star inverter window AC.
#Re-installation is covered only at the time of repair. #For T&C visit: http://bit.ly/GATnC_

Smart Series

When smart meets cool

Scan to know more

AC 2.5T TR HIC 30K3TG RA IOT 4 (2.5 TR. I 3 STAR)

AC 1.6T HIC 19M3TG SA IOT 4 (1.6 TR. I 3 STAR)

AC 1.6T HIC 19M3TG WA IOT 4 (1.6 TR. I 3 STAR)

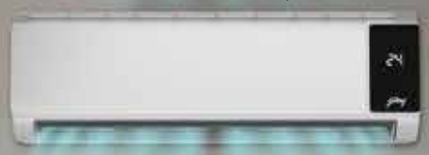

AC 1.6T HIC 19M3TG GA IOT 4 (1.6 TR. I 3 STAR)

AC 1.5T TR HIC 18Z3TG VA IOT4 (1.5 TR. | 3 STAR)

AC 1.5T TR HIC 18J5TG GA IOT4 (1.5 TR. | 5 STAR)

AC 1.5T TR HIC 18J5TG WA IOT4 (1.5 TR. | 5 STAR)

AC 1T TR HIC 12Z3TG VA IOT4 (1.0 TR. | 3 STAR)

AC 1T TR HIC 12Y3TH GA IOT4 (1.0 TR. | 3 STAR)

5 Star ★★★★★

3 Star ★★★☆☆

Now turn your home into a smart home with seamless app control, hands-free voice commands and intelligent automation. Designed for modern living, these ACs ensure effortless comfort and optimised energy usage.

5 year comprehensive warranty worth ₹ 7,990/- free

- **No Hidden Costs***
- No Gas Refill Charges
- No Remote Replacement Charges
- No Technician Charges

AI Technology	Smart IOT	Voice-enabled (Alexa & Google Home)	App-enabled	i-Sense technology
52°C Heavy-duty cooling	5 IN 1 Convertible technology	4-way swing technology#	Inverter technology	Pure air filter
BLUE FIN Anti-corrosive coating	100% Cu Copper condenser & connecting pipe	R32 Eco-friendly refrigerant	99.99%+ Virus sterilization# nano coated anti-viral filter	Silent operation
Anti-freeze technology	10 Year Compressor warranty	5 Year PCB warranty	5 Star and 3 Star energy rating	

#Features may vary by model. *TnC apply: http://bit.ly/GATnC_

Specifications

MODEL NO.	AC 2.5T TR HIC 30K3TG RA IOT 4	AC 1.5T TR HIC 18J5TG WA IOT4	AC 1.5T TR HIC 18J5TG GA IOT4
Performance parameters			
Rated Voltage / Frequency / Phase	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph
Tonnage classification	2.5 TR.	1.5 TR.	1.5 TR.
Max Cooling Capacity (rated cooling capacity)	7550 (7050)	5250 (4800)	5250 (4800)
Power Input in watts	2160	1090	1090
ISEER (star rating)	4.33 (3 Star)	5.65 (5 Star)	5.65 (5 Star)
Electricity Consumption (1600 hours) units per year	1260.65	657.81	657.81
Rated Current (AMP)	9.9	5.0	5.0
Air Flow Volume (Dry CFM / Dry CMH)	818 / 1390	689 / 1170	689 / 1170
Noise Level Indoor (high / medium / low) in dB(A)	46 / 40 / 38	46 / 40 / 38	46 / 40 / 38
Features			
Modes	Dry / Cool / Auto / Fan / Turbo	Dry / Cool / Auto / Fan / Turbo	Dry / Cool / Auto / Fan / Turbo
Timer On / Off	Yes	Yes	Yes
Vertical Swing (up & down swing movement)	Auto	Auto	Auto
Horizontal Swing (left & right swing movement)	Auto	Auto	Auto
Auto Restart with memory function	Yes	Yes	Yes
Hygiene+ / Blow Self Clean	Yes	Yes	Yes
Anti Freeze	Yes	Yes	Yes
Self Diagnosis Error Codes	Yes	Yes	Yes
Display in IDU	Hidden Display	Hidden Display	Hidden Display
5 in 1 Convertible	Yes	Yes	Yes
Lock	Yes	Yes	Yes
Clock	Yes	Yes	Yes
i-Sense	Yes	Yes	Yes
Filter Configuration	Anti Dust Filter+ Active Carbon + Anti Viral Nano Coated	Pure Air Filter	Pure Air Filter
Evaporator Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Condenser Fins	Regular Fins	Regular Fins	Regular Fins
Expansion Device in ODU	Capillary	EEV	EEV
Dimensions, weight & input power supply			
Front Panel Colour (strip)	Rose Gold	White	White (Rose Gold)
Net IDU dimension (W x H x D) cm	110.0 x 33.0 x 25.0	100.0 x 29.5 x 23.0	100.0 x 29.5 x 23.0
Gross IDU dimension (W x H x D) cm	119.0 x 40.0 X 32.0	110.0 x 35.2 x 28.7	110.0 x 35.2 x 28.7
Input Power Supply	Indoor unit	Indoor unit	Indoor unit
Net Weight IDU (kg)	14.0	11.0	11.0
Gross Weight IDU (kg)	18.0	14.0	14.0
Net ODU dimension (W x H x D) cm	78.1 x 55.7 x 28.1	78.1 x 55.7 x 28.1	78.1 x 55.7 x 28.1
Gross ODU dimension (W x H x D) cm	90.5 x 59.0 x 37.5	90.5 x 59.0 x 37.5	90.5 x 59.0 x 37.5
Noise Level Outdoor in dB(A)	60.0	60.0	60.0
Net Weight ODU (kg)	27.4	26.0	26.0
Gross Weight ODU (kg)	31.4	30.0	30.0
Compressor			
Compressor Type	Rotary Inverter	Rotary Inverter	Rotary Inverter
Compressor Warranty	10 Year	10 Year	10 Year
Acoustic Jacket on compressor	Yes	Yes	Yes
Refrigerant & ambient operations			
Refrigerant	R32	R32	R32
Max Ambient Temperature (cooling)°C	52	52	52

Specifications

MODEL NO.	AC 1.5T TR HIC 18Z3TG VA IOT4	AC 1T TR HIC 12Y3TH GA IOT4	AC 1T TR HIC 12Z3TG VA IOT4
Performance parameters			
Rated Voltage / Frequency / Phase	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph
Tonnage classification	1.5 TR.	1.0 TR.	1.0 TR.
Max Cooling Capacity (rated cooling capacity)	5250 (5000)	3600 (3380)	3600 (3380)
Power Input in watts	1478	1034	1034
ISEER (star rating)	4.31 (3 Star)	4.31 (3 Star)	4.31 (3 Star)
Electricity Consumption (1600 hours) units per year	899.05	607.63	607.63
Rated Current (AMP)	6.76	4.73	4.73
Air Flow Volume (Dry CFM / Dry CMH)	647 / 1100	423 / 720	435 / 740
Noise Level Indoor (high / medium / low) in dB(A)	46 / 40 / 38	43 / 37 / 35	43 / 37 / 35
Features			
Modes	Dry / Cool / Auto / Fan / Sleep / Turbo	Dry / Cool / Auto / Fan / Sleep / Turbo	Dry / Cool / Auto / Fan / Sleep / Turbo
Timer On / Off	Yes	Yes	Yes
Vertical Swing (up & down swing movement)	Auto	Auto	Auto
Horizontal Swing (left & right swing movement)	Auto	Auto	Auto
Auto Restart with memory function	Yes	Yes	Yes
Hygiene+ / Blow Self Clean	Yes	Yes	Yes
Anti Freeze	Yes	Yes	Yes
Self Diagnosis Error Codes	Yes	Yes	Yes
Display in IDU	Hidden Display	Hidden Display	Hidden Display
5 in 1 Convertible	Yes	Yes	Yes
Lock	Yes	Yes	Yes
Clock	Yes	Yes	Yes
i-Sense	Yes	Yes	Yes
Filter Configuration	Pure Air Filter	Pure Air Filter	Pure Air Filter
Evaporator Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Condenser Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Expansion Device in ODU	Capillary	Capillary	Capillary
Dimensions, weight & input power supply			
Front Panel Colour (strip)	White (Voilet)	White (Gold)	White (Voilet)
Net IDU dimension (W x H x D) cm	98.2 x 30.0 x 24.1	84.9 x 28.9 x 21.0	86.5 x 28.9 x 23.0
Gross IDU dimension (W x H x D) cm	105.4 x 37.2 X 30.1	91.0 x 34.6 x 27.6	92.8 x 34.6 x 27.6
Input Power Supply	Indoor unit	Indoor unit	Indoor unit
Net Weight IDU (kg)	11.8	10.0	10.4
Gross Weight IDU (kg)	13.3	12.5	12.9
Net ODU dimension (W x H x D) cm	77.8 x 54.0 x 28.0	71.7 x 49.5 x 24.0	71.7 x 49.5 x 24.0
Gross ODU dimension (W x H x D) cm	90.5 x 58.0 x 37.5	81.8 x 56.5 x 33.3	81.8 x 56.5 x 33.3
Noise Level Outdoor in dB(A)	57.0	57.0	57.0
Net Weight ODU (kg)	23.0	20.0	20.0
Gross Weight ODU (kg)	27.5	23.5	23.5
Compressor			
Compressor Type	Rotary Inverter	Rotary Inverter	Rotary Inverter
Compressor Warranty	10 Year	10 Year	10 Year
Acoustic Jacket on compressor	Yes	Yes	Yes
Refrigerant & ambient operations			
Refrigerant	R32	R32	R32
Max Ambient Temperature (cooling)°C	52	52	52

Eon Magnus

Cool by design, mighty by nature

Scan to know more

AC 1.6T HIC 19M3TG MA IOT 4 (1.6 TR. I 3 STAR)

AC 1.6T HIC 19M3TG SA IOT 4 (1.6 TR. I 3 STAR)

AC 1.6T HIC 19M3TG WA IOT 4 (1.6 TR. I 3 STAR)

AC 1.6T HIC 19M3TG GA IOT 4 (1.6 TR. I 3 STAR)

Also, available in 1.1 TR.

3 Star ★★★☆☆

Now turn your home into a smart home with seamless app control, hands-free voice commands, and intelligent automation. Designed for modern living, these ACs ensure effortless comfort, optimised energy use.

5 year comprehensive warranty worth ₹ 7,990/- free

No Hidden Costs*
- No Gas Refill Charges
- No Remote Replacement Charges
- No Technician Charges

AI Technology	Smart IOT	Voice-enabled (Alexa & Google Home)	App-enabled	Smart diagnosis
i-Sense technology	52°C Heavy-duty cooling	5 IN 1 Convertible technology	4-way swing technology	Inverter technology
Pure air filter	BLUE FIN Anti-corrosive coating	100% Cu Copper condenser & connecting pipe	R32 Eco-friendly refrigerant	Anti-freeze technology
10 Year Compressor warranty	5 Year PCB warranty	3 Star energy rating		

*TnC apply: http://bit.ly/GATnC_

Specifications

MODEL NO.	AC 1.6T TR HIC 19M3TG WA IOT4	AC 1.6T TR HIC 19M3TG GA IOT4	AC 1.6T TR HIC 19M3TG SA IOT4
Performance parameters			
Rated Voltage / Frequency / Phase	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph
Tonnage classification	1.6 TR.	1.6 TR.	1.6 TR.
Max Cooling Capacity (rated cooling capacity)	5600 (5300)	5600 (5300)	5600 (5300)
Power Input in watts	1648	1648	1648
ISEER (star rating)	4.40 (3 Star)	4.40 (3 Star)	4.40 (3 Star)
Electricity Consumption (1600 hours) units per year	933.49	933.49	933.49
Rated Current (AMP)	7.5	7.5	7.5
Air Flow Volume (Dry CFM / Dry CMH)	795 / 1350	795 / 1350	795 / 1350
Noise Level Indoor (high / medium / low) in dB(A)	44 / 42 / 40	44 / 42 / 40	44 / 42 / 40
Features			
Modes	Dry / Cool / Auto / Fan / Turbo	Dry / Cool / Auto / Fan / Turbo	Dry / Cool / Auto / Fan / Turbo
Timer On / Off	Yes	Yes	Yes
Vertical Swing (up & down swing movement)	Auto	Auto	Auto
Horizontal Swing (left & right swing movement)	Auto	Auto	Auto
Auto Restart with memory function	Yes	Yes	Yes
Hygiene+ / Blow Self Clean	Yes	Yes	Yes
Anti Freeze	Yes	Yes	Yes
Self Diagnosis Error Codes	Yes	Yes	Yes
Display in IDU	Hidden Display	Hidden Display	Hidden Display
5 in 1 Convertible	Yes	Yes	Yes
Lock	Yes	Yes	Yes
Clock	Yes	Yes	Yes
i-Sense	Yes	Yes	Yes
Filter Configuration	Pure Air Filter	Pure Air Filter	Pure Air Filter
Evaporator Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Condenser Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Expansion Device in ODU	Capillary	Capillary	Capillary
Dimensions, weight & input power supply			
Front Panel Colour (strip)	White	Gold	Silver
Net IDU dimension (W x H x D) cm	106.0 x 33.0 x 24.5	106.0 x 33.0 x 24.5	106.0 x 33.0 x 24.5
Gross IDU dimension (W x H x D) cm	116.0 x 40.0 x 32.0	116.0 x 40.0 x 32.0	116.0 x 40.0 x 32.0
Input Power Supply	Indoor unit	Indoor unit	Indoor unit
Net Weight IDU (kg)	13.0	13.0	13.0
Gross Weight IDU (kg)	17.0	17.0	17.0
Net ODU dimension (W x H x D) cm	78.1 x 55.7 x 28.1	78.1 x 55.7 x 28.1	78.1 x 55.7 x 28.1
Gross ODU dimension (W x H x D) cm	90.5 x 59.0 x 37.5	90.5 x 59.0 x 37.5	90.5 x 59.0 x 37.5
Noise Level Outdoor in dB(A)	60.0	60.0	60.0
Net Weight ODU (kg)	23.0	23.0	23.0
Gross Weight ODU (kg)	27.0	27.0	27.0
Compressor			
Compressor Type	Rotary Inverter	Rotary Inverter	Rotary Inverter
Compressor Warranty	10 Year	10 Year	10 Year
Acoustic Jacket on compressor	Yes	Yes	Yes
Refrigerant & ambient operations			
Refrigerant	R32	R32	R32
Max Ambient Temperature (cooling)°C	52	52	52

Specifications

MODEL NO.	AC 1.6T TR HIC 19M3TG KA IOT4	AC 1.6T TR HIC 19M3TG MA IOT4	AC 1.1T TR HIC 13M3TH WA IOT4
Performance parameters			
Rated Voltage / Frequency / Phase	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph
Tonnage classification	1.6 TR.	1.6 TR.	1.1 TR.
Max Cooling Capacity (rated cooling capacity)	5600 (5300)	5600 (5300)	4000 (3800)
Power Input in watts	1648	1648	1170
ISEER (star rating)	4.40 (3 Star)	4.40 (3 Star)	4.44 (3 Star)
Electricity Consumption (1600 hours) units per year	933.49	933.49	662.99
Rated Current (AMP)	7.5	7.5	5.3
Air Flow Volume (Dry CFM / Dry CMH)	795 / 1350	795 / 1350	530 / 900
Noise Level Indoor (high / medium / low) in dB(A)	44 / 42 / 40	44 / 42 / 40	44 / 42 / 40
Features			
Modes	Dry / Cool / Auto / Fan / Turbo	Dry / Cool / Auto / Fan / Turbo	Dry / Cool / Auto / Fan / Turbo
Timer On / Off	Yes	Yes	Yes
Vertical Swing (up & down swing movement)	Auto	Auto	Auto
Horizontal Swing (left & right swing movement)	Auto	Auto	Auto
Auto Restart with memory function	Yes	Yes	Yes
Hygiene+ / Blow Self Clean	Yes	Yes	Yes
Anti Freeze	Yes	Yes	Yes
Self Diagnosis Error Codes	Yes	Yes	Yes
Display in IDU	Hidden Display	Hidden Display	Hidden Display
5 in 1 Convertible	Yes	Yes	Yes
Lock	Yes	Yes	Yes
Clock	Yes	Yes	Yes
i-Sense	Yes	Yes	Yes
Filter Configuration	Pure Air Filter	Pure Air Filter	Pure Air Filter
Evaporator Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Condenser Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Expansion Device in ODU	Capillary	Capillary	Capillary
Dimensions, weight & input power supply			
Front Panel Colour (strip)	Black	Mirror	White
Net IDU dimension (W x H x D) cm	106.0 x 33.0 x 24.5	106.0 x 33.0 x 24.5	90.0 x 29.5 x 24.5
Gross IDU dimension (W x H x D) cm	116.0 x 40.0 x 32.0	116.0 x 40.0 x 32.0	100.5 x 36.2 x 31.2
Input Power Supply	Indoor unit	Indoor unit	Indoor unit
Net Weight IDU (kg)	13.0	13.0	10.0
Gross Weight IDU (kg)	17.0	17.0	13.0
Net ODU dimension (W x H x D) cm	78.1 x 55.7 x 28.1	78.1 x 55.7 x 28.1	67.2 x 52.0 x 24.0
Gross ODU dimension (W x H x D) cm	90.5 x 59.0 x 37.5	90.5 x 59.0 x 37.5	79.5 x 57.5 x 37.0
Noise Level Outdoor in dB(A)	60.0	60.0	56.0
Net Weight ODU (kg)	23.0	23.0	19.5
Gross Weight ODU (kg)	27.0	27.0	23.0
Compressor			
Compressor Type	Rotary Inverter	Rotary Inverter	Rotary Inverter
Compressor Warranty	10 Year	10 Year	10 Year
Acoustic Jacket on compressor	Yes	Yes	Yes
Refrigerant & ambient operations			
Refrigerant	R32	R32	R32
Max Ambient Temperature (cooling)°C	52	52	52

Specifications

MODEL NO.	AC 1.1T TR HIC 13M3TH GA IOT4	AC 1.1T TR HIC 13M3TH SA IOT4	AC 1.1T TR HIC 13M3TH KA IOT4
Performance parameters			
Rated Voltage / Frequency / Phase	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph
Tonnage classification	1.1 TR.	1.1 TR.	1.1 TR.
Max Cooling Capacity (rated cooling capacity)	4000 (3800)	4000 (3800)	4000 (3800)
Power Input in watts	1170	1170	1170
ISEER (star rating)	4.44 (3 Star)	4.44 (3 Star)	4.44 (3 Star)
Electricity Consumption (1600 hours) units per year	662.99	662.99	662.99
Rated Current (AMP)	5.3	5.3	5.3
Air Flow Volume (Dry CFM / Dry CMH)	530 / 900	530 / 900	530 / 900
Noise Level Indoor (high / medium / low) in dB(A)	44 / 42 / 40	44 / 42 / 40	44 / 42 / 40
Features			
Modes	Dry / Cool / Auto / Fan / Turbo	Dry / Cool / Auto / Fan / Turbo	Dry / Cool / Auto / Fan / Turbo
Timer On / Off	Yes	Yes	Yes
Vertical Swing (up & down swing movement)	Auto	Auto	Auto
Horizontal Swing (left & right swing movement)	Auto	Auto	Auto
Auto Restart with memory function	Yes	Yes	Yes
Hygiene+ / Blow Self Clean	Yes	Yes	Yes
Anti Freeze	Yes	Yes	Yes
Self Diagnosis Error Codes	Yes	Yes	Yes
Display in IDU	Hidden Display	Hidden Display	Hidden Display
5 in 1 Convertible	Yes	Yes	Yes
Lock	Yes	Yes	Yes
Clock	Yes	Yes	Yes
i-Sense	Yes	Yes	Yes
Filter Configuration	Pure Air Filter	Pure Air Filter	Pure Air Filter
Evaporator Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Condenser Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Expansion Device in ODU	Capillary	Capillary	Capillary
Dimensions, weight & input power supply			
Front Panel Colour (strip)	Gold	Silver	Black
Net IDU dimension (W x H x D) cm	90.0 x 29.5 x 24.5	90.0 x 29.5 x 24.5	90.0 x 29.5 x 24.5
Gross IDU dimension (W x H x D) cm	100.5 x 36.2 x 31.2	100.5 x 36.2 x 31.2	100.5 x 36.2 x 31.2
Input Power Supply	Indoor unit	Indoor unit	Indoor unit
Net Weight IDU (kg)	10.0	10.0	10.0
Gross Weight IDU (kg)	13.0	13.0	13.0
Net ODU dimension (W x H x D) cm	67.2 x 52.0 x 24.0	67.2 x 52.0 x 24.0	67.2 x 52.0 x 24.0
Gross ODU dimension (W x H x D) cm	79.5 x 57.5 x 37.0	79.5 x 57.5 x 37.0	79.5 x 57.5 x 37.0
Noise Level Outdoor in dB(A)	56.0	56.0	56.0
Net Weight ODU (kg)	19.5	19.5	19.5
Gross Weight ODU (kg)	23.0	23.0	23.0
Compressor			
Compressor Type	Rotary Inverter	Rotary Inverter	Rotary Inverter
Compressor Warranty	10 Year	10 Year	10 Year
Acoustic Jacket on compressor	Yes	Yes	Yes
Refrigerant & ambient operations			
Refrigerant	R32	R32	R32
Max Ambient Temperature (cooling)°C	52	52	52

Eon Vogue

Touchwood

Scan to know more

AC 1.5T TR HIC 18V3TG WACY IOT4 (1.5 TR. | 3 STAR)

AC 1.5T TR HIC 18V3TG WATK IOT4 (1.5 TR. | 3 STAR)

3 Star ★★★☆☆

Inspired by nature, this wood-finish AC blends seamlessly with earthy and classic interiors, offering both timeless aesthetics and energy-efficient cooling.

5 year comprehensive warranty worth ₹ 7,990/- free

No Hidden Costs*
- No Gas Refill Charges
- No Remote Replacement Charges
- No Technician Charges

AI Technology	Smart IOT	App-enabled	Smart diagnosis	i-Sense technology
Looks like wood	Easy to clean	Durable finish	52°C Heavy-duty cooling	5 IN 1 Convertible technology
4-way swing technology	Inverter technology	Pure air filter	BLUE FIN Anti-corrosive coating	100% Cu Copper condenser & connecting pipe
R32 REFRIGERANT Eco-friendly refrigerant	Silent operation	Anti-freeze technology	5 Year PCB warranty	10 Year Compressor warranty
3 Star energy rating				

*TnC apply: http://bit.ly/GATnC_

Specifications

MODEL NO.	AC 1.5T TR HIC 18V3TG WA CY IOT4	AC 1.5T TR HIC 18V3TG WA TK IOT4
Performance parameters		
Rated Voltage / Frequency / Phase	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph
Tonnage classification	1.5 TR.	1.5 TR.
Max Cooling Capacity (rated cooling capacity)	5250 (5000)	5250 (5000)
Power Input in watts	1478	1478
ISEER (star rating)	4.31 (3 Star)	4.31 (3 Star)
Electricity Consumption (1600 hours) units per year	899.05	899.05
Rated Current (AMP)	6.76	6.76
Air Flow Volume (Dry CFM / Dry CMH)	647 / 1100	647 / 1100
Noise Level Indoor (high / medium / low) in dB(A)	46 / 40 / 38	46 / 40 / 38
Features		
Modes	Dry / Cool / Auto / Fan / Sleep / Turbo	Dry / Cool / Auto / Fan / Sleep / Turbo
Timer On / Off	Yes	Yes
Vertical Swing (up & down swing movement)	Auto	Auto
Horizontal Swing (left & right swing movement)	Auto	Auto
Auto Restart with memory function	Yes	Yes
Hygiene+ / Blow Self Clean	Yes	Yes
Anti Freeze	Yes	Yes
Self Diagnosis Error Codes	Yes	Yes
Display in IDU	Hidden Display	Hidden Display
5 in 1 Convertible	Yes	Yes
Lock	Yes	Yes
Clock	Yes	Yes
i-Sense	Yes	Yes
Filter Configuration	Pure Air Filter	Pure Air Filter
Evaporator Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Condenser Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Expansion Device in ODU	Capillary	Capillary
Direct control through mobile app	Yes	Yes
Energy Saving Eco	Yes	Yes
Power Consumption Graph	Yes	Yes
Indoor low noise mode	Yes	Yes
Smart Diagnostics	Yes	Yes
Smart service support	Yes	Yes
Help	Yes	Yes
Alexa Voice Assistant	Yes	Yes
Push Notifications	Yes	Yes
Dimensions, weight & input power supply		
Front Panel Colour (strip)	Wooden Panel (Cypress)	Wooden Panel (Teak)
Net IDU dimension (W x H x D) cm	98.2 x 30.0 x 24.1	98.2 x 30.0 x 24.1
Gross IDU dimension (W x H x D) cm	105.4 x 37.2 x 30.1	105.4 x 37.2 x 30.1
Input Power Supply	Indoor unit	Indoor unit
Net Weight IDU (kg)	11.8	11.8
Gross Weight IDU (kg)	13.3	13.3
Net ODU dimension (W x H x D) cm	77.8 x 54.0 x 28.0	77.8 x 54.0 x 28.0
Gross ODU dimension (W x H x D) cm	90.5 x 58.0 x 37.5	90.5 x 58.0 x 37.5
Noise Level Outdoor in dB(A)	57.0	57.0
Net Weight ODU (kg)	23.0	23.0
Gross Weight ODU (kg)	27.5	27.5
Compressor		
Compressor Type	Rotary Inverter	Rotary Inverter
Compressor Warranty	10 Year	10 Year
Acoustic Jacket on compressor	Yes	Yes
Refrigerant & ambient operations		
Refrigerant	R32	R32
Max Ambient Temperature (cooling)°C	52	52

Eon Vogue

Grace meets grandeur

Scan to know more

AC 1.5T TR HIC 18V3TG WAMG IOT4 (1.5 TR | 3 STAR)

IOT

AC 1.5T TR HIC 18V3TG WAMW IOT4 (1.5 TR | 3 STAR)

IOT

3 Star ★★★☆☆

Inspired by nature, this marble-finish AC blends seamlessly with earthy and classic interiors, offering both timeless aesthetics and energy-efficient cooling.

5 year comprehensive warranty worth ₹ 7,990/- free

- **No Hidden Costs***
- No Gas Refill Charges
- No Remote Replacement Charges
- No Technician Charges

AI Technology	Smart IOT	App-enabled	Smart diagnosis	i-Sense technology
Marble finish panel	Easy to clean	Durable finish	52°C Heavy-duty cooling	5 IN 1 Convertible technology
4-way swing technology	Inverter technology	Pure air filter	BLUE FIN Anti-corrosive coating	100% Cu Copper condenser & connecting pipe
R32 REFRIGERANT Eco-friendly refrigerant	Silent operation	Anti-freeze technology	5 Year PCB warranty	10 Year Compressor warranty
3 Star energy rating				

*TnC apply: http://bit.ly/GATnC_

Specifications

MODEL NO.	AC 1.5T TR HIC 18V3TG WAMG IOT4	AC 1.5T TR HIC 18V3TG WAMW IOT4
Performance parameters		
Rated Voltage / Frequency / Phase	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph
Tonnage classification	1.5 TR.	1.5 TR.
Max Cooling Capacity (rated cooling capacity)	5250 (5000)	5250 (5000)
Power Input in watts	1478	1478
ISEER (star rating)	4.31 (3 Star)	4.31 (3 Star)
Electricity Consumption (1600 hours) units per year	899.05	899.05
Rated Current (AMP)	6.76	6.76
Air Flow Volume (Dry CFM / Dry CMH)	647 / 1100	647 / 1100
Noise Level Indoor (high / medium / low) in dB(A)	46 / 40 / 38	46 / 40 / 38
Features		
Modes	Dry / Cool / Auto / Fan / Sleep / Turbo	Dry / Cool / Auto / Fan / Sleep / Turbo
Timer On / Off	Yes	Yes
Vertical Swing (up & down swing movement)	Auto	Auto
Horizontal Swing (left & right swing movement)	Auto	Auto
Auto Restart with memory function	Yes	Yes
Hygiene+ / Blow Self Clean	Yes	Yes
Anti Freeze	Yes	Yes
Self Diagnosis Error Codes	Yes	Yes
Display in IDU	Hidden Display	Hidden Display
5 in 1 Convertible	Yes	Yes
Lock	Yes	Yes
Clock	Yes	Yes
i-Sense	Yes	Yes
Filter Configuration	Pure Air Filter	Pure Air Filter
Evaporator Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Condenser Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Expansion Device in ODU	Capillary	Capillary
Direct control through mobile app	Yes	Yes
Energy Saving Eco	Yes	Yes
Power Consumption Graph	Yes	Yes
Indoor low noise mode	Yes	Yes
Smart Diagnostics	Yes	Yes
Smart service support	Yes	Yes
Help	Yes	Yes
Alexa Voice Assistant	Yes	Yes
Push Notifications	Yes	Yes
Dimensions, weight & input power supply		
Front Panel Colour (strip)	Marble Beige	Marble White
Net IDU dimension (W x H x D) cm	98.2 x 30.0 x 24.1	98.2 x 30.0 x 24.1
Gross IDU dimension (W x H x D) cm	105.4 x 37.2 x 30.1	105.4 x 37.2 x 30.1
Input Power Supply	Indoor unit	Indoor unit
Net Weight IDU (kg)	11.8	11.8
Gross Weight IDU (kg)	13.3	13.3
Net ODU dimension (W x H x D) cm	77.8 x 54.0 x 28.0	77.8 x 54.0 x 28.0
Gross ODU dimension (W x H x D) cm	90.5 x 58.0 x 37.5	90.5 x 58.0 x 37.5
Noise Level Outdoor in dB(A)	57.0	57.0
Net Weight ODU (kg)	23.0	23.0
Gross Weight ODU (kg)	27.5	27.5
Compressor		
Compressor Type	Rotary Inverter	Rotary Inverter
Compressor Warranty	10 Year	10 Year
Acoustic Jacket on compressor	Yes	Yes
Refrigerant & ambient operations		
Refrigerant	R32	R32
Max Ambient Temperature (cooling)°C	52	52

Anti-Leak

Get India's first Leakproof* Split AC with original patented technology.

Scan to know more

AC 1 T TR HIC 12Z3TH GA AL (1.0 TR. | 3 STAR)

3 Star ★★★☆☆

Up to 85% of ACs leak at least once (internal estimates), but Godrej's Anti-Leak technology (patented) puts an end to that. Enjoy cool air without the worry of water damage.

5 year comprehensive warranty worth ₹ 7,990/- free

No Hidden Costs*
- No Gas Refill Charges
- No Remote Replacement Charges
- No Technician Charges

AI Technology	Smart diagnosis	i-Sense technology	Anti-leak Technology (patented)#	52°C Heavy-duty cooling
5 IN 1 Convertible technology	Inverter technology	Pure air filter	BLUE FIN Anti-corrosive coating	100% Cu Copper condenser & connecting pipe
R32 REFRIGERANT Eco-friendly refrigerant	Silent operation	Acoustic jacket on compressor	Anti-freeze technology	5 Year PCB warranty
10 Year Compressor warranty	3 Star energy rating			

#Subject to regular servicing by authorized experts. Regular cleaning of AC's filter should be done for optimal performance.*TnC apply: http://bit.ly/GATnC_

Specifications

MODEL NO.	AC 1 T TR HIC 12Z3TH GA AL
Performance parameters	
Rated Voltage / Frequency / Phase	230 V / 50 Hz / 1 ph
Tonnage classification	1.0 TR.
Max Cooling Capacity (rated cooling capacity)	3600 (3380)
Power Input in watts	1034
ISEER (star rating)	4.31 (3 Star)
Electricity Consumption (1600 hours) units per year	607.63
Rated Current (AMP)	4.73
Air Flow Volume (Dry CFM / Dry CMH)	435 / 740
Noise Level Indoor (high / medium / low) in dB(A)	43 / 37 / 35
Features	
Modes	Dry / Cool / Auto / Fan / Sleep / Turbo
Timer On / Off	No / Yes
Vertical Swing (up & down swing movement)	Auto
Horizontal Swing (left & right swing movement)	Manual
Auto Restart with memory function	Yes
Hygiene+ / Blow Self Clean	Blow
Anti Freeze	Yes
Self Diagnosis Error Codes	Yes
Display in IDU	Hidden Display
5 in 1 Convertible	Yes
Lock	No
Clock	No
i-Sense	Yes
Filter Configuration	Pure Air Filter
Evaporator Fins	Hydrophilic Blue Fins
Condenser Fins	Hydrophilic Blue Fins
Expansion Device in ODU	Capillary
Dimensions, weight & input power supply	
Front Panel Colour (strip)	White (Gold)
Net IDU dimension (W x H x D) cm	86.5 x 28.9 x 23.0
Gross IDU dimension (W x H x D) cm	92.8 x 34.6 x 27.6
Input Power Supply	Indoor unit
Net Weight IDU (kg)	10.7
Gross Weight IDU (kg)	13.2
Net ODU dimension (W x H x D) cm	71.7 x 49.5 x 24.0
Gross ODU dimension (W x H x D) cm	81.8 x 56.5 x 33.3
Noise Level Outdoor in dB(A)	57.0
Net Weight ODU (kg)	20.0
Gross Weight ODU (kg)	23.5
Compressor	
Compressor Type	Rotary Inverter
Compressor Warranty	10 Year
Acoustic Jacket on compressor	Yes
Refrigerant & ambient operations	
Refrigerant	R32
Max Ambient Temperature (cooling)°C	52

Art Studio Series

When lifestyle imitates art

Scan to know more

AC 1.5T TR HIC 18A3TG PA IL IOT4 (1.5 TR. | 3 STAR)

IOT

AC 1.5T TR HIC 18A3TG PA WL IOT4 (1.5 TR. | 3 STAR)

IOT

AC 1.5T TR HIC 18A3TG PA IG IOT4 (1.5 TR. | 3 STAR)

IOT

AC 1.5T TR HIC 18A3TG PA WG IOT4 (1.5 TR. | 3 STAR)

IOT

Also available in Non-IOT and 1 TR

3 Star ★★★☆☆

With powerful cooling and elegant ivy designs, they blend perfectly into your décor—because staying cool is an art!

5 year comprehensive warranty worth ₹ 7,990/- free

No Hidden Costs*
- No Gas Refill Charges
- No Remote Replacement Charges
- No Technician Charges

AI Technology	Smart IOT	Voice-enabled (Alexa & Google Home)	App-enabled	i-Sense technology
52°C Heavy-duty cooling	5 IN 1 Convertible technology	4-way swing technology#	Inverter technology	Pure air filter
BLUE FIN Anti-corrosive coating	100% Cu Copper condenser & connecting pipe	R32 Eco-friendly refrigerant	Anti-freeze technology	10 Year Compressor warranty
5 Year PCB warranty	3 Star energy rating			

*T&Cs apply: http://bit.ly/GATnC_

Specifications

MODEL NO.	TR HIC 18A3TG PA IL IOT4 TR HIC 18A3TG PA IL 4	TR HIC 18A3TG PA IG IOT4 TR HIC 18A3TG PA IG 4	TR HIC 18A3TG PA WL IOT4 TR HIC 18A3TG PA WL 4
Performance parameters			
Rated Voltage / Frequency / Phase	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph
Tonnage classification	1.5 TR.	1.5 TR.	1.5 TR.
Max Cooling Capacity (rated cooling capacity)	5250 (5000)	5250 (5000)	5250 (5000)
Power Input in watts	1478	1478	1478
ISEER (star rating)	4.31 (3 Star)	4.31 (3 Star)	4.31 (3 Star)
Electricity Consumption (1600 hours) units per year	899.05	899.05	899.05
Rated Current (AMP)	6.76	6.76	6.76
Air Flow Volume (Dry CFM / Dry CMH)	647 / 1100	647 / 1100	647 / 1100
Noise Level Indoor (high / medium / low) in dB(A)	46 / 40 / 38	46 / 40 / 38	46 / 40 / 38
Features			
Modes	Dry / Cool / Auto / Fan / Sleep / Turbo	Dry / Cool / Auto / Fan / Sleep / Turbo	Dry / Cool / Auto / Fan / Sleep / Turbo
Timer On / Off	Yes	Yes	Yes
Vertical Swing (up & down swing movement)	Auto	Auto	Auto
Horizontal Swing (left & right swing movement)	Auto	Auto	Auto
Auto Restart with memory function	Yes	Yes	Yes
Hygiene+ / Blow Self Clean	Yes / Hygiene+	Yes / Hygiene+	Yes / Hygiene+
Anti Freeze	Yes	Yes	Yes
Self Diagnosis Error Codes	Yes	Yes	Yes
Display in IDU	Hidden Display	Hidden Display	Hidden Display
5 in 1 Convertible	Yes	Yes	Yes
Lock	Yes	Yes	Yes
Clock	Yes	Yes	Yes
i-Sense	Yes	Yes	Yes
Filter Configuration	Pure Air Filter	Pure Air Filter	Pure Air Filter
Evaporator Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Condenser Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Expansion Device in ODU	Capillary	Capillary	Capillary
Dimensions, weight & input power supply			
Front Panel Colour (strip)	White (Pure Grey) Ivy blue pattern	White (Pure Grey) Ivy beige pattern	White (Pure Grey) Wavy blue pattern
Net IDU dimension (W x H x D) cm	98.2 x 30.0 x 24.1	98.2 x 30.0 x 24.1	98.2 x 30.0 x 24.1
Gross IDU dimension (W x H x D) cm	105.4 x 37.2 x 30.1	105.4 x 37.2 x 30.1	105.4 x 37.2 x 30.1
Input Power Supply	Indoor unit	Indoor unit	Indoor unit
Net Weight IDU (kg)	11.8	11.8	11.8
Gross Weight IDU (kg)	13.3	13.3	13.3
Net ODU dimension (W x H x D) cm	77.8 x 54.0 x 28.0	77.8 x 54.0 x 28.0	77.8 x 54.0 x 28.0
Gross ODU dimension (W x H x D) cm	90.5 x 58.0 x 37.5	90.5 x 58.0 x 37.5	90.5 x 58.0 x 37.5
Noise Level Outdoor in dB(A)	57.0	57.0	57.0
Net Weight ODU (kg)	23.0	23.0	23.0
Gross Weight ODU (kg)	27.5	27.5	27.5
Compressor			
Compressor Type	Rotary Inverter	Rotary Inverter	Rotary Inverter
Compressor Warranty	10 Year	10 Year	10 Year
Acoustic Jacket on compressor	Yes	Yes	Yes
Refrigerant & ambient operations			
Refrigerant	R32	R32	R32
Max Ambient Temperature (cooling)°C	52	52	52

Specifications

MODEL NO.	TR HIC 18A3TG PA WG IOT4 TR HIC 18A3TG PA WG 4	TR HIC 12A3TH PA WG IOT4 TR HIC 12A3TH PA WG 4	TR HIC 12A3TH PA WL IOT4 TR HIC 12A3TH PA WL 4
Performance parameters			
Rated Voltage / Frequency / Phase	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph
Tonnage classification	1.5 TR.	1.0 TR.	1.0 TR.
Max Cooling Capacity (rated cooling capacity)	5250 (5000)	3600 (3380)	3600 (3380)
Power Input in watts	1478	1034	1034
ISEER (star rating)	4.31 (3 Star)	4.31 (3 Star)	4.31 (3 Star)
Electricity Consumption (1600 hours) units per year	899.05	607.63	607.63
Rated Current (AMP)	6.76	4.73	4.73
Air Flow Volume (Dry CFM / Dry CMH)	647 / 1100	435 / 740	435 / 740
Noise Level Indoor (high / medium / low) in dB(A)	46 / 40 / 38	43 / 37 / 35	43 / 37 / 35
Features			
Modes	Dry / Cool / Auto / Fan / Sleep / Turbo	Dry / Cool / Auto / Fan / Sleep / Turbo	Dry / Cool / Auto / Fan / Sleep / Turbo
Timer On / Off	Yes	Yes	Yes
Vertical Swing (up & down swing movement)	Auto	Auto	Auto
Horizontal Swing (left & right swing movement)	Auto	Auto	Auto
Auto Restart with memory function	Yes	Yes	Yes
Hygiene+ / Blow Self Clean	Yes / Hygiene+	Yes / Hygiene+	Yes / Hygiene+
Anti Freeze	Yes	Yes	Yes
Self Diagnosis Error Codes	Yes	Yes	Yes
Display in IDU	Hidden Display	Hidden Display	Hidden Display
5 in 1 Convertible	Yes	Yes	Yes
Lock	Yes	Yes	Yes
Clock	Yes	Yes	Yes
i-Sense	Yes	Yes	Yes
Filter Configuration	Pure Air Filter	Pure Air Filter	Pure Air Filter
Evaporator Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Condenser Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Expansion Device in ODU	Capillary	Capillary	Capillary
Dimensions, weight & input power supply			
Front Panel Colour (strip)	White (Pure Grey) Wavy beige pattern	White (Pure Grey) Wavy beige pattern	White (Pure Grey) Wavy blue pattern
Net IDU dimension (W x H x D) cm	98.2 x 30.0 x 24.1	86.5 x 28.9 x 23.0	86.5 x 28.9 x 23.0
Gross IDU dimension (W x H x D) cm	105.4 x 37.2 x 30.1	92.8 x 34.6 x 27.6	92.8 x 34.6 x 27.6
Input Power Supply	Indoor unit	Indoor unit	Indoor unit
Net Weight IDU (kg)	11.8	10.4	10.4
Gross Weight IDU (kg)	13.3	12.9	12.9
Net ODU dimension (W x H x D) cm	77.8 x 54.0 x 28.0	71.7 x 49.5 x 24.0	71.7 x 49.5 x 24.0
Gross ODU dimension (W x H x D) cm	90.5 x 58.0 x 37.5	81.8 x 56.5 x 33.3	81.8 x 56.5 x 33.3
Noise Level Outdoor in dB(A)	57	57	57
Net Weight ODU (kg)	23	20	20
Gross Weight ODU (kg)	27.5	23.5	23.5
Compressor			
Compressor Type	Rotary Inverter	Rotary Inverter	Rotary Inverter
Compressor Warranty	10 Year	10 Year	10 Year
Acoustic Jacket on compressor	Yes	Yes	Yes
Refrigerant & ambient operations			
Refrigerant	R32	R32	R32
Max Ambient Temperature (cooling)°C	52	52	52

Specifications

MODEL NO.	TR HIC 12A3TH PA IL IOT4 TR HIC 12A3TH PA IL4	TR HIC 12A3TH PA IG IOT4 TR HIC 12A3TH PA IG 4
Performance parameters		
Rated Voltage / Frequency / Phase	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph
Tonnage classification	1.0 TR.	1.0 TR.
Max Cooling Capacity (rated cooling capacity)	3600 (3380)	3600 (3380)
Power Input in watts	1034	1034
ISEER (star rating)	4.31 (3 Star)	4.31 (3 Star)
Electricity Consumption (1600 hours) units per year	607.63	607.63
Rated Current (AMP)	4.73	4.73
Air Flow Volume (Dry CFM / Dry CMH)	435 / 740	435 / 740
Noise Level Indoor (high / medium / low) in dB(A)	43 / 37 / 35	43 / 37 / 35
Features		
Modes	Dry / Cool / Auto / Fan / Sleep / Turbo	Dry / Cool / Auto / Fan / Sleep / Turbo
Timer On / Off	Yes	Yes
Vertical Swing (up & down swing movement)	Auto	Auto
Horizontal Swing (left & right swing movement)	Auto	Auto
Auto Restart with memory function	Yes	Yes
Hygiene+ / Blow Self Clean	Yes / Hygiene+	Yes / Hygiene+
Anti Freeze	Yes	Yes
Self Diagnosis Error Codes	Yes	Yes
Display in IDU	Hidden Display	Hidden Display
5 in 1 Convertible	Yes	Yes
Lock	Yes	Yes
Clock	Yes	Yes
i-Sense	Yes	Yes
Filter Configuration	Pure Air Filter	Pure Air Filter
Evaporator Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Condenser Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Expansion Device in ODU	Capillary	Capillary
Dimensions, weight & input power supply		
Front Panel Colour (strip)	White (Pure Grey strip) Ivy blue pattern	White (Pure Grey strip) Ivy beige pattern
Net IDU dimension (W x H x D) cm	86.5 x 28.9 x 23.0	86.5 x 28.9 x 23.0
Gross IDU dimension (W x H x D) cm	92.8 x 34.6 x 27.6	92.8 x 34.6 x 27.6
Input Power Supply	Indoor unit	Indoor unit
Net Weight IDU (kg)	10.4	10.4
Gross Weight IDU (kg)	12.9	12.9
Net ODU dimension (W x H x D) cm	71.7 x 49.5 x 24.0	71.7 x 49.5 x 24.0
Gross ODU dimension (W x H x D) cm	81.8 x 56.5 x 33.3	81.8 x 56.5 x 33.3
Noise Level Outdoor in dB(A)	57.0	57.0
Net Weight ODU (kg)	20.0	20.0
Gross Weight ODU (kg)	23.5	23.5
Compressor		
Compressor Type	Rotary Inverter	Rotary Inverter
Compressor Warranty	10 Year	10 Year
Acoustic Jacket on compressor	Yes	Yes
Refrigerant & ambient operations		
Refrigerant	R32	R32
Max Ambient Temperature (cooling)°C	52	52

Super-efficient ACs

Better than 5 stars

Scan to know more

5.8 ISEER

AC 1.5TR HIC 19J5TG-WA (1.5 TR. | 5 STAR)

More planet saving

More power saving

5 Star ★★★★★

Our 5-star-rated R32 Inverter Split ACs come with 5-in-1 convertible cooling technology*, are powerful, energy-efficient and eco-friendly. With a 100% copper condenser and 10-year inverter compressor warranty, they promise long-lasting and superior performance.

5 year comprehensive warranty worth ₹ 7,990/- free

No Hidden Costs*
- No Gas Refill Charges
- No Remote Replacement Charges
- No Technician Charges

AI Powered	Smart diagnosis	High ISEER Rating	i-Sense technology	52°C Heavy-duty cooling
5 IN 1 Convertible technology	Inverter technology	Pure air filter	BLUE FIN Anti-corrosive coating	100% Cu Copper condenser & connecting pipe
EEV Electronic expansion valve#	R32 Eco-friendly refrigerant	Anti-freeze technology	10 Year Compressor warranty	5 Year PCB warranty
5 Star energy rating				

#Features may vary by model. *TnC apply: http://bit.ly/GATnC_

Specifications

MODEL NO.	AC 1.5T TR HIC 19J5TG WA
Performance parameters	
Rated Voltage / Frequency / Phase	230 V / 50 Hz / 1 ph
Tonnage classification	1.5 TR.
Max Cooling Capacity (rated cooling capacity)	5650 (5150W)
Power Input in watts	1214
ISEER (star rating)	5.80 (5 Star)
Electricity Consumption (1600 hours) units per year	687.9
Rated Current (AMP)	5.5
Air Flow Volume (Dry CFM / Dry CMH)	736 / 1250
Noise Level Indoor (high/ medium / low) in dB(A)	44 / 42 / 40
Features	
Modes	Dry / Cool / Auto / Fan / Turbo
Timer On / Off	Timer off only
Vertical Swing (up & down swing movement)	Auto
Horizontal Swing (left & right swing movement)	Manual
Auto Restart with memory function	Yes
Hygiene+ / Blow Self Clean	Yes
Anti Freeze	Yes
Self Diagnosis Error Codes	Yes
Display in IDU	Hidden display
5 in 1 Convertible	Yes
Lock	No
Clock	No
i-Sense	Yes
Filter Configuration	Pure Air Filter
Evaporator Fins	Hydrophilic Blue Fins
Condenser Fins	Hydrophilic Blue Fins
Expansion Device in ODU	EEV
Dimensions, weight & input power supply	
Front Panel Colour (strip)	White
Net IDU dimension (W x H x D) cm	106.0 X 33.0 X 24.5
Gross IDU dimension (W x H x D) cm	116.0 X 40.0 X 32.0
Input Power Supply	Indoor unit
Net Weight IDU (kg)	13.0
Gross Weight IDU (kg)	17.0
Net ODU dimension (W x H x D) cm	78.1 X 55.7 X 28.1
Gross ODU dimension (W x H x D) cm	90.5 X 59.0 X 37.5
Noise Level Outdoor in dB(A)	60.0
Net Weight ODU (kg)	27.0
Gross Weight ODU (kg)	31.0
Compressor	
Compressor Type	Rotary inverter
Compressor Warranty	10 Year
Acoustic Jacket on compressor	Yes
Refrigerant & ambient operations	
Refrigerant	R32
Max Ambient Temperature (cooling)°C	52

5-star Inverter Series Split Air Conditioners

Scan to know more

AC 1.5T TR HIC 18J5TG WA IOT4 (1.5 TR. | 5 STAR)

IOT

AC 1.5T TR HIC 18J5TG GA IOT4 (1.5 TR. | 5 STAR)

IOT

AC 1.5T TR HIC 18Q5TH WA (1.5 TR. | 5 STAR)

AC 1.5T TR HIC 18J5TG WA (1.5 TR. | 5 STAR)

AC 1.0T TR HIC 12J5TG WA (1.0 TR. | 5 STAR)

AC 1.0T TR HIC 12Q5TH WA (1.0 TR. | 5 STAR)

5 Star ★★★★★

Our 5-star-rated R32 inverter split ACs are powerful, energy-efficient and eco-friendly. With 100% copper condenser and 10-year inverter compressor warranty, they promise long-lasting and superior performance.

5 year comprehensive warranty worth ₹ 7,990/- free

- **No Hidden Costs***
- No Gas Refill Charges
- No Remote Replacement Charges
- No Technician Charges

AI Technology	Smart IOT	Voice-enabled (Alexa & Google Home)	App-enabled	i-Sense technology
52°C Heavy-duty cooling	5 IN 1 Convertible technology	4-way swing technology#	Inverter technology	Pure air filter
BLUE FIN Anti-corrosive coating	Acoustic jacket on compressor	EEV Electronic expansion valve#	R32 Eco-friendly refrigerant	10 Year Compressor warranty
5 Year PCB warranty	5 Star energy rating			

#Features may vary by model. *TnC apply: http://bit.ly/GATnC_

Specifications

MODEL NO.	AC 1.5T TR HIC 18J5TG WA IOT4	AC 1.5T TR HIC 18J5TG GA IOT4	AC 1.5T TR HIC 18J5TG WA
Performance parameters			
Rated Voltage / Frequency / Phase	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph
Tonnage classification	1.5 TR.	1.5 TR.	1.5 TR.
Max Cooling Capacity (rated cooling capacity)	5250 (4800)	5250 (4800)	5250 (4800)
Power Input in watts	1090	1090	1090
ISEER (star rating)	5.65 (5 Star)	5.65 (5 Star)	5.65 (5 Star)
Electricity Consumption (1600 hours) units per year	657.81	657.81	657.81
Rated Current (AMP)	5.0	5.0	5.0
Air Flow Volume (Dry CFM / Dry CMH)	689 / 1170	689 / 1170	689 / 1170
Noise Level Indoor (high / medium / low) in dB(A)	46 / 40 / 38	46 / 40 / 38	46 / 40 / 38
Features			
Modes	Dry / Cool / Auto / Fan / Turbo	Dry / Cool / Auto / Fan / Turbo	Dry / Cool / Auto / Fan / Turbo
Timer On / Off	Yes	Yes	Timer Off only
Vertical Swing (up & down swing movement)	Auto	Auto	Auto
Horizontal Swing (left & right swing movement)	Auto	Auto	Manual
Auto Restart with memory function	Yes	Yes	Yes
Hygiene+ / Blow Self Clean	Yes	Yes	Yes
Anti Freeze	Yes	Yes	Yes
Self Diagnosis Error Codes	Yes	Yes	Yes
Display in IDU	Hidden Display	Hidden Display	Hidden Display
5 in 1 Convertible	Yes	Yes	Yes
Lock	Yes	Yes	No
Clock	Yes	Yes	No
i-Sense	Yes	Yes	Yes
Filter Configuration	Pure Air Filter	Pure Air Filter	Pure Air Filter
Evaporator Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Condenser Fins	Regular Fins	Regular Fins	Regular Fins
Expansion Device in ODU	EEV	EEV	EEV
Dimensions, weight & input power supply			
Front Panel Colour (strip)	White	Rose Gold	White
Net IDU dimension (W x H x D) cm	100.0 x 29.5 x 23.0	100.0 x 29.5 x 23.0	100.0 x 29.5 x 23.0
Gross IDU dimension (W x H x D) cm	110.0 x 35.2 x 28.7	110.0 x 35.2 x 28.7	110.0 x 35.2 x 28.7
Input Power Supply	Indoor unit	Indoor unit	Indoor unit
Net Weight IDU (kg)	11.0	11.0	11.0
Gross Weight IDU (kg)	14.0	14.0	14.0
Net ODU dimension (W x H x D) cm	78.1 x 55.7 x 28.1	78.1 x 55.7 x 28.1	78.1 x 55.7 x 28.1
Gross ODU dimension (W x H x D) cm	90.5 x 59.0 x 37.5	90.5 x 59.0 x 37.5	90.5 x 59.0 x 37.5
Noise Level Outdoor in dB(A)	60.0	60.0	60.0
Net Weight ODU (kg)	26.0	26.0	26.0
Gross Weight ODU (kg)	30.0	30.0	30.0
Compressor			
Compressor Type	Rotary Inverter	Rotary Inverter	Rotary Inverter
Compressor Warranty	10 Year	10 Year	10 Year
Acoustic Jacket on compressor	Yes	Yes	Yes
Refrigerant & ambient operations			
Refrigerant	R32	R32	R32
Max Ambient Temperature (cooling)°C	52	52	52

Specifications

MODEL NO.	AC 1.5T TR HIC 18Q5TH WA	AC 1.0T TR HIC 12J5TG WA	AC 1.0T TR HIC 12Q5TH WA
Performance parameters			
Rated Voltage / Frequency / Phase	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph
Tonnage classification	1.5 TR.	1.0 TR.	1.0 TR.
Max Cooling Capacity (rated cooling capacity)	5250 (4800)	3800 (3450)	3815 (3450)
Power Input in watts	1075	795	775
ISEER (star rating)	5.65 (5 Star)	5.70 (5 Star)	5.66 (5 Star)
Electricity Consumption (1600 hours) units per year	657.25	468.65	472.24
Rated Current (AMP)	4.9	3.6	3.5
Air Flow Volume (Dry CFM / Dry CMH)	647 / 1100	530 / 900	470 / 800
Noise Level Indoor (high / medium / low) in dB(A)	46 / 44 / 37	44 / 42 / 40	44 / 42 / 36
Features			
Modes	Dry / Cool / Auto / Fan / Turbo	Dry / Cool / Auto / Fan / Turbo	Dry / Cool / Auto / Fan / Turbo
Timer On / Off	Timer Off only	Timer Off only	Timer Off only
Vertical Swing (up & down swing movement)	Auto	Auto	Auto
Horizontal Swing (left & right swing movement)	Manual	Manual	Manual
Auto Restart with memory function	Yes	Yes	Yes
Hygiene+ / Blow Self Clean	Yes	Yes	Yes
Anti Freeze	Yes	Yes	Yes
Self Diagnosis Error Codes	Yes	Yes	Yes
Display in IDU	Hidden Display	Hidden Display	Hidden Display
5 in 1 Convertible	Yes	Yes	Yes
Lock	No	No	No
Clock	No	No	No
i-Sense	Yes	Yes	Yes
Filter Configuration	Pure Air Filter	Pure Air Filter	Pure Air Filter
Evaporator Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Condenser Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Expansion Device in ODU	EEV	EEV	Capillary
Dimensions, weight & input power supply			
Front Panel Colour (strip)	White	White	White
Net IDU dimension (W x H x D) cm	104.0 x 31.5 x 23.5	90.0 x 29.5 x 23.0	92.0 x 32.0 x 24.0
Gross IDU dimension (W x H x D) cm	110.4 x 38.0 x 31.0	100.5 x 35.2 x 29.0	98.0 x 39.0 x 32.0
Input Power Supply	Indoor unit	Indoor unit	Indoor unit
Net Weight IDU (kg)	13.2	10.0	11.3
Gross Weight IDU (kg)	16.3	13.0	14.0
Net ODU dimension (W x H x D) cm	78.0 x 56.0 x 30.0	78.1 x 55.7 x 28.1	78.0 x 56.0 x 30.0
Gross ODU dimension (W x H x D) cm	91.8 x 60.0 x 40.5	90.5 x 59.0 x 37.5	91.8 x 60.0 x 40.5
Noise Level Outdoor in dB(A)	52.0	58.0	52.0
Net Weight ODU (kg)	28.0	23.5	24.2
Gross Weight ODU (kg)	31.7	27.5	28.1
Compressor			
Compressor Type	Rotary Inverter	Rotary Inverter	Rotary Inverter
Compressor Warranty	10 Year	10 Year	10 Year
Acoustic Jacket on compressor	Yes	Yes	Yes
Refrigerant & ambient operations			
Refrigerant	R32	R32	R32
Max Ambient Temperature (cooling)°C	52	52	52

3-star Inverter Series Split Air Conditioners

Scan to know more

AC 3.0T TR HIC 36B3TH WA 4 (3.0 TR | 3 STAR)

AC 3.0T TR HIC 36B3TH GA IOT4 (3.0 TR | 3 STAR)

IOT

AC 2.0T TR HIC 24J3TS WA (2.0 TR | 3 STAR)

AC 2.0T TR HIC 24Q3TH WA (2.0 TR | 3 STAR)

3 Star ★★★☆☆

Our 3-star Inverter Split ACs are powerful, energy-efficient and eco-friendly. With a 100% copper condenser and 5-year compressor warranty, they promise long-lasting and superior performance.

5 year comprehensive warranty worth ₹ 7,990/- free

No Hidden Costs*
- No Gas Refill Charges
- No Remote Replacement Charges
- No Technician Charges

AI Technology	Smart IOT#	Voice-enabled (Alexa & Google Home)#	App-enabled#
Smart diagnosis	i-Sense technology	52°C Heavy-duty cooling	5 IN 1 Convertible technology
4-way swing technology#	Inverter technology	BLUE FIN Anti-corrosive coating	R32 Eco-friendly refrigerant
99.99%+ Virus sterilization# nano coated anti-viral filter	Acoustic jacket on compressor	Anti-freeze technology	10 Year Compressor warranty
5 Year PCB warranty	3 Star energy rating		

#Virus reduction measured on Nano-coated filter surface by independent laboratory. #Features may vary by model. *TnC apply: http://bit.ly/GATnC_

3-star Inverter Series Split Air Conditioners

Scan to know more

AC 1.5T TR HIC 18Z3TG WA (1.5 TR. | 3 STAR)
AC 1.5T TR HIC 18Z3TG WA IOT4 (1.5 TR. | 3 STAR)

IOT

AC 1.5T TR HIC 18Z3TG SA (1.5 TR. | 3 STAR)

AC 1.5T TR HIC 18Y3TG WA (1.5 TR. | 3 STAR)

AC 1.5T TR HIC 18Y3TG SA (1.5 TR. | 3 STAR)

AC 1.5T TR HIC 18Q3TH WA (1.5 TR | 3 STAR)

AC 1.0T TR HIC 12Q3TH WA (1.0 TR | 3 STAR)

AC 1.0T TR HIC 12Y3TH WA (1.0 TR. | 3 STAR)

3 Star ★★★☆☆

Our 3-star Inverter Split ACs are powerful, energy-efficient and eco-friendly. With a 100% copper condenser and 5-year compressor warranty, they promise long-lasting and superior performance.

5 year comprehensive warranty worth ₹ 7,990/- free

- **No Hidden Costs***
- No Gas Refill Charges
- No Remote Replacement Charges
- No Technician Charges

AI Technology	Smart IOT#	App-enabled#	Voice-enabled (Alexa & Google Home)#
Smart diagnosis	i-Sense technology	52°C Heavy-duty cooling	5 IN 1 Convertible technology
4-way swing technology#	Inverter technology	Pure air filter	BLUE FIN Anti-corrosive coating
R32 Eco-friendly refrigerant	Anti-freeze technology	10 Year Compressor warranty	5 Year PCB warranty
3 Star energy rating			

#Features may vary by model. *TnC apply: http://bit.ly/GATnC_

Specifications

MODEL NO.	AC 3.0T TR HIC 36B3TH WA 4	AC 3.0T TR HIC 36B3TH GA IOT4	AC 2.0T TR HIC 24J3TS WA
Performance parameters			
Rated Voltage / Frequency / Phase	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph
Tonnage classification	2.27 TR.	2.27 TR.	2.0 TR.
Max Cooling Capacity (rated cooling capacity)	8800 (8000)	8800 (8000)	6450 (6100)
Power Input in watts	2550	2550	1810
ISEER (star rating)	4.31 (3 Star)	4.31 (3 Star)	4.39 (3 Star)
Electricity Consumption (1600 hours) units per year	1437.51	1437.51	1076.57
Rated Current (AMP)	11.6	11.6	8.3
Air Flow Volume (Dry CFM / Dry CMH)	912 / 1550	912 / 1550	736 / 1250
Noise Level Indoor (high / medium / low) in dB(A)	46 / 42 / 40	46 / 42 / 40	46 / 42 / 40
Features			
Modes	Dry / Cool / Auto / Fan / Turbo	Dry / Cool / Auto / Fan / Turbo	Dry / Cool / Auto / Fan / Turbo
Timer On / Off	Yes	Yes	Timer Off only
Vertical Swing (up & down swing movement)	Auto	Auto	Auto
Horizontal Swing (left & right swing movement)	Auto	Auto	Manual
Auto Restart with memory function	Yes	Yes	Yes
Hygiene+ / Blow Self Clean	Yes	Yes	Yes
Anti Freeze	Yes	Yes	Yes
Self Diagnosis Error Codes	Yes	Yes	Yes
Display in IDU	Hidden Display	Hidden Display	Hidden Display
5 in 1 Convertible	Yes	Yes	Yes
Lock	Yes	Yes	No
Clock	Yes	Yes	No
i-Sense	Yes	Yes	Yes
Filter Configuration	Anti Dust + Active Carbon + Anti Viral Nano Coated	Anti Dust + Active Carbon + Anti Viral Nano Coated	Anti Dust + Active Carbon + Anti Viral Nano Coated
Evaporator Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Condenser Fins	Regular Fins	Regular Fins	Regular Fins
Expansion Device in ODU	EEV	EEV	Cappilary
Dimensions, weight & input power supply			
Front Panel Colour (strip)	White	White	White
Net IDU dimension (W x H x D) cm	126.0 x 36.2 x 28.2	126.0 x 36.2 x 28.2	100.0 x 29.5 x 23.0
Gross IDU dimension (W x H x D) cm	132.5 x 43.5 x 35.5	132.5 x 43.5 x 35.5	110.0 x 35.2 x 28.7
Input Power Supply	Outdoor Unit	Outdoor Unit	Indoor unit
Net Weight IDU (kg)	19.5	19.5	11.0
Gross Weight IDU (kg)	24.7	24.7	14.0
Net ODU dimension (W x H x D) cm	78.0 x 54.0 x 31.0	78.0 x 54.0 x 31.0	78.1 x 55.7 x 28.1
Gross ODU dimension (W x H x D) cm	88.5 x 61.5 x 41.7	88.5 x 61.5 x 41.7	90.5 x 59.0 x 37.5
Noise Level Outdoor in dB(A)	56.0	56.0	60.0
Net Weight ODU (kg)	28.7	28.7	26.5
Gross Weight ODU (kg)	33.0	33.0	30.5
Compressor			
Compressor Type	Dual Rotary Inverter	Dual Rotary Inverter	Rotary Inverter
Compressor Warranty	10 Year	10 Year	10 Year
Acoustic Jacket on compressor	Yes	Yes	Yes
Refrigerant & ambient operations			
Refrigerant	R32	R32	R32
Max Ambient Temperature (cooling)°C	52	52	52

Specifications

MODEL NO.	AC 2.0T TR HIC 24Q3TH WA	AC 1.5T TR HIC 18Z3TG WA	AC 1.5T TR HIC 18Z3TG WA IOT4
Performance parameters			
Rated Voltage / Frequency / Phase	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph
Tonnage classification	2.0 TR.	1.5 TR.	1.5 TR.
Max Cooling Capacity (rated cooling capacity)	6650 (6100)	5250 (5000)	5250 (5000)
Power Input in watts	1765	1478	1478
ISEER (star rating)	4.40 (3 Star)	4.31 (3 Star)	4.31 (3 Star)
Electricity Consumption (1600 hours) units per year	1074.11	899.05	899.05
Rated Current (AMP)	8.1	6.76	6.76
Air Flow Volume (Dry CFM / Dry CMH)	736 / 1250	647 / 1100	647 / 1100
Noise Level Indoor (high / medium / low) in dB(A)	46 / 44 / 38	46 / 40 / 38	46 / 40 / 38
Features			
Modes	Dry / Cool / Auto / Fan / Turbo	Dry / Cool / Auto / Fan / Sleep / Turbo	Dry / Cool / Auto / Fan / Sleep / Turbo
Timer On / Off	Timer Off only	No / Yes	Yes
Vertical Swing (up & down swing movement)	Auto	Auto	Auto
Horizontal Swing (left & right swing movement)	Manual	Manual	Auto
Auto Restart with memory function	Yes	Yes	Yes
Hygiene+ / Blow Self Clean	Yes	Blow	Yes
Anti Freeze	Yes	Yes	Yes
Self Diagnosis Error Codes	Yes	Yes	Yes
Display in IDU	Hidden Display	Hidden Display	Hidden Display
5 in 1 Convertible	Yes	Yes	Yes
Lock	No	No	Yes
Clock	No	No	Yes
i-Sense	Yes	Yes	Yes
Filter Configuration	Anti Dust Filter + Active Carbon + Anti Viral Nano Coated	Pure Air Filter	Pure Air Filter
Evaporator Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Condenser Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Expansion Device in ODU	Capillary	Capillary	Capillary
Dimensions, weight & input power supply			
Front Panel Colour (strip)	White	White	White
Net IDU dimension (W x H x D) cm	104.0 x 31.5 x 23.5	98.2 x 30.0 x 24.1	98.2 x 30.0 x 24.1
Gross IDU dimension (W x H x D) cm	110.4 x 38.0 x 31.0	105.4 x 37.2 x 30.1	105.4 x 37.2 x 30.1
Input Power Supply	Indoor unit	Indoor unit	Indoor unit
Net Weight IDU (kg)	13.0	11.8	11.8
Gross Weight IDU (kg)	16.1	13.3	13.3
Net ODU dimension (W x H x D) cm	78.0 x 56.0 x 30.0	77.8 x 54.0 x 28.0	77.8 x 54.0 x 28.0
Gross ODU dimension (W x H x D) cm	91.8 x 60.0 x 40.5	90.5 x 58.0 x 37.5	90.5 x 58.0 x 37.5
Noise Level Outdoor in dB(A)	56.0	57.0	57.0
Net Weight ODU (kg)	26.6	23.0	23.0
Gross Weight ODU (kg)	30.6	27.5	27.5
Compressor			
Compressor Type	Rotary Inverter	Rotary Inverter	Rotary Inverter
Compressor Warranty	10 Year	10 Year	10 Year
Acoustic Jacket on compressor	Yes	Yes	Yes
Refrigerant & ambient operations			
Refrigerant	R32	R32	R32
Max Ambient Temperature (cooling)°C	52	52	52

Specifications

MODEL NO.	AC 1.5T TR HIC 18Z3TG SA	AC 1.5T TR HIC 18Y3TG WA	AC 1.5T TR HIC 18Y3TG SA
Performance parameters			
Rated Voltage / Frequency / Phase	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph
Tonnage classification	1.5 TR.	1.5 TR.	1.5 TR.
Max Cooling Capacity (rated cooling capacity)	5250 (5000)	5250 (5000)	5250 (5000)
Power Input in watts	1478	1478	1478
ISEER (star rating)	4.31 (3 Star)	4.31 (3 Star)	4.31 (3 Star)
Electricity Consumption (1600 hours) units per year	899.05	899.05	899.05
Rated Current (AMP)	6.76	6.76	6.76
Air Flow Volume (Dry CFM / Dry CMH)	647 / 1100	647 / 1100	647 / 1100
Noise Level Indoor (high / medium / low) in dB(A)	46 / 40 / 38	46 / 40 / 38	46 / 40 / 38
Features			
Modes	Dry / Cool / Auto / Fan / Sleep / Turbo	Dry / Cool / Auto / Fan / Sleep / Turbo	Dry / Cool / Auto / Fan / Sleep / Turbo
Timer On / Off	No / Yes	No / Yes	No / Yes
Vertical Swing (up & down swing movement)	Auto	Auto	Auto
Horizontal Swing (left & right swing movement)	Manual	Manual	Manual
Auto Restart with memory function	Yes	Yes	Yes
Hygiene+ / Blow Self Clean	Blow	Blow	Blow
Anti Freeze	Yes	Yes	Yes
Self Diagnosis Error Codes	Yes	Yes	Yes
Display in IDU	Hidden Display	Hidden Display	Hidden Display
5 in 1 Convertible	Yes	Yes	Yes
Lock	No	No	No
Clock	No	No	No
i-Sense	Yes	Yes	Yes
Filter Configuration	Pure Air Filter	Pure Air Filter	Pure Air Filter
Evaporator Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Condenser Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Expansion Device in ODU	Capillary	Capillary	Capillary
Dimensions, weight & input power supply			
Front Panel Colour (strip)	White (Shiny Blue)	White (Chrome)	White (Shiny Blue)
Net IDU dimension (W x H x D) cm	98.2 x 30.0 x 24.1	97.0 x 30.0 x 23.5	97.0 x 30.0 x 23.5
Gross IDU dimension (W x H x D) cm	105.4 x 37.2 x 30.1	103.8 x 37.2 x 30.1	103.8 x 37.2 x 30.1
Input Power Supply	Indoor unit	Indoor unit	Indoor unit
Net Weight IDU (kg)	11.8	11.3	11.3
Gross Weight IDU (kg)	13.3	12.8	12.8
Net ODU dimension (W x H x D) cm	77.8 x 54.0 x 28.0	77.8 x 54.0 x 28.0	77.8 x 54.0 x 28.0
Gross ODU dimension (W x H x D) cm	90.5 x 58.0 x 37.5	90.5 x 58.0 x 37.5	90.5 x 58.0 x 37.5
Noise Level Outdoor in dB(A)	57.0	57.0	57.0
Net Weight ODU (kg)	23.0	23.0	23.0
Gross Weight ODU (kg)	27.5	27.5	27.5
Compressor			
Compressor Type	Rotary Inverter	Rotary Inverter	Rotary Inverter
Compressor Warranty	10 Year	10 Year	10 Year
Acoustic Jacket on compressor	Yes	Yes	Yes
Refrigerant & ambient operations			
Refrigerant	R32	R32	R32
Max Ambient Temp (cooling)°C	52	52	52

Specifications

MODEL NO.	AC 1.5T TR HIC 18Q3TH WA	AC 1.0T TR HIC 12Q3TH WA	AC 1.0T TR HIC 12Z3TH WA
Performance parameters			
Rated Voltage / Frequency / Phase	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph
Tonnage classification	1.5 TR.	1.0 TR.	1.0 TR.
Max Cooling Capacity (rated cooling capacity)	5250 (4800)	3815 (3450)	3600 (3380)
Power Input in watts	1380	990	1034
ISEER (star rating)	4.39 (3 Star)	4.35 (3 Star)	4.31 (3 Star)
Electricity Consumption (1600 hours) units per year	846.37	613.59	607.63
Rated Current (AMP)	6.3	4.5	4.73
Air Flow Volume (Dry CFM / Dry CMH)	618 / 1050	412 / 700	435 / 740
Noise Level Indoor (high / medium / low) in dB(A)	44 / 42 / 36	42 / 36 / 33	43 / 37 / 35
Features			
Modes	Dry / Cool / Auto / Fan / Turbo	Dry / Cool / Auto / Fan / Turbo	Dry / Cool / Auto / Fan / Sleep / Turbo
Timer On / Off	Timer Off only	Timer Off only	No / Yes
Vertical Swing (up & down swing movement)	Auto	Auto	Auto
Horizontal Swing (left & right swing movement)	Manual	Manual	Manual
Auto Restart with memory function	Yes	Yes	Yes
Hygiene+ / Blow Self Clean	Yes	Yes	Blow
Anti Freeze	Yes	Yes	Yes
Self Diagnosis Error Codes	Yes	Yes	Yes
Display in IDU	Hidden Display	Hidden Display	Hidden Display
5 in 1 Convertible	Yes	Yes	Yes
Lock	No	No	No
Clock	No	No	No
i-Sense	Yes	Yes	Yes
Filter Configuration	Pure Air Filter	Pure Air Filter	Pure Air Filter
Evaporator Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Condenser Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Expansion Device in ODU	Capillary	Capillary	Capillary
Dimensions, weight & input power supply			
Front Panel Colour (strip)	White	White	White
Net IDU dimension (W x H x D) cm	92.0 x 32.0 x 24.0	81.0 x 26.8 x 21.8	86.5 x 28.9 x 23.0
Gross IDU dimension (W x H x D) cm	98.0 x 39.0 x 32.0	91.2 x 33.0 x 28.2	92.8 x 34.6 x 27.6
Input Power Supply	Indoor unit	Indoor unit	Indoor unit
Net Weight IDU (kg)	11.2	08.8	10.4
Gross Weight IDU (kg)	13.6	11.0	12.9
Net ODU dimension (W x H x D) cm	71.5 x 49.0 x 24.0	71.5 x 49.0 x 24.0	71.7 x 49.5 x 24.0
Gross ODU dimension (W x H x D) cm	85.0 x 55.9 x 35.5	85.0 x 55.9 x 35.5	81.8 x 56.5 x 33.3
Noise Level Outdoor in dB(A)	52.0	52.0	57.0
Net Weight ODU (kg)	21.0	19.9	20.0
Gross Weight ODU (kg)	24.7	23.2	23.5
Compressor			
Compressor Type	Rotary Inverter	Rotary Inverter	Rotary Inverter
Compressor Warranty	10 Year	10 Year	10 Year
Acoustic Jacket on compressor	Yes	Yes	Yes
Refrigerant & ambient operations			
Refrigerant	R32	R32	R32
Max Ambient Temperature (cooling)°C	52	52	52

1.5 Tr 5-Star Window Inverter Air Conditioners

Scan to know more

5 Star ★★★★★

Our 5 star rated inverter Window ACs are powerful, energy efficient, and eco-friendly. With a 100% copper condenser and 5 year and 10 year compressor warranty, they promise long-lasting and superior performance.

5 year comprehensive warranty worth ₹ 7,990/- free

No Hidden Costs*
- No Gas Refill Charges
- No Remote Replacement Charges
- No Technician Charges

AI Technology	Smart diagnosis	i-Sense technology	5 IN 1 Convertible technology
Inverter technology	Sleep mode	Turbo mode#	Pure air filter
100% Cu Copper condenser & connecting pipe#	R32 Eco-friendly refrigerant	Anti-freeze technology	10 Year Compressor warranty
5 star energy rating			

*Features may vary by model. **TnC apply: http://bit.ly/GATnC_

Specifications

MODEL NO.	AC 1.5T TR WIC 18F5TG WA
Performance parameters	
Rated Voltage / Frequency / Phase	230 V / 50 Hz / 1 ph
Tonnage classification	1.45 TR.
Max Cooling Capacity (rated cooling capacity)	5550 (5100W)
Power Input in watts	1575
ISEER (star rating)	3.75 (5 Star)
Electricity Consumption (1600 hours) units per year	1052.32
Rated Current (AMP)	7.2
Air Flow Volume (Dry CFM / Dry CMH)	471 / 800
Noise Level Indoor (high / medium / low) in dB(A)	52 / 50 / 48
Features	
Modes	Dry / Cool / Auto / Fan / Turbo
Timer On / Off	Yes
Vertical Swing (up & down swing movement)	Manual
Horizontal Swing (left & right swing movement)	Auto
Auto Restart with memory function	Yes
Hygiene+ / Blow Self Clean	Yes
Anti Freeze	Yes
Self Diagnosis Error Codes	Yes
Display in IDU	Hidden display
5 in 1 Convertible	Yes
Lock	Yes
Clock	Yes
i-Sense	Yes
Filter Configuration	Pure Air Filter
Evaporator Fins	Hydrophilic Blue Fins
Condenser Fins	Regular Fins
Expansion Device in ODU	Capillary
Dimensions, weight & input power supply	
Front Panel Colour (strip)	White
Net IDU dimension (W x H x D) cm	-
Gross IDU dimension (W x H x D) cm	-
Input Power Supply	Indoor unit
Net Weight IDU (kg)	-
Gross Weight IDU (kg)	-
Net ODU dimension (W x H x D) cm	66.0 x 43.0 x 73.3
Gross ODU dimension (W x H x D) cm	75.5 x 57.0 x 82.0
Noise Level Outdoor in dB(A)	60.0
Net Weight ODU (kg)	45.0
Gross Weight ODU (kg)	51.0
Compressor	
Compressor Type	Rotary inverter
Compressor Warranty	10 Year
Acoustic Jacket on compressor	Yes
Refrigerant & ambient operations	
Refrigerant	R32
Max Ambient Temperature (cooling)°C	48

One Way Cassette AC

Scan to know more

AC 2T CIC 24GTC3 1ZP (2 TR. | 3 STAR)

AC 1.8T CIC 21GTC3 1ZP (1.8 TR. | 3 STAR)

AC 1.5T CIC 18GTC3 1ZP (1.5 TR. | 3 STAR)

3 Star ★★★☆☆

Our Cassette ACs are designed to meet the needs of unique commercial spaces, combining 360° airflow, energy efficiency, and discreet installation to ensure comfort without compromising on design.

AI Technology	i-Sense technology	52°C Heavy-duty cooling	5 IN 1 Convertible technology	4-way swing technology
Inverter technology	Auto restart	Pure air filter	EEV Electronic expansion valve#	Twin rotary compressor
R32 Eco-friendly refrigerant	Self-clean	Anti-freeze technology	5 Year Compressor warranty	3 Star energy rating

#Features may vary by model. *TnC apply: http://bit.ly/GATnC_

Specifications

MODEL NO.	AC 2T CIC 24GTC3 1ZP	AC 1.8T CIC 21GTC3 1ZP	AC 1.5T CIC 18GTC3 1ZP
Performance parameters			
Rated Voltage / Frequency / Phase	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph	230 V / 50 Hz / 1 ph
Tonnage classification	2.0 TR.	1.8 TR.	1.5 TR.
Max Cooling Capacity (rated cooling capacity)	7140 (6800)	6510 (6200)	5510 (5250)
Power Input in watts	2060	1880	1535
ISEER (star rating)	4.39 (3 Star)	4.37 (3 Star)	4.39 (3 Star)
Electricity Consumption (1600 hours) units per year	1198.31	1099.42	925.79
Rated Current (AMP)	9.4	8.6	7.0
Air Flow Volume (Dry CFM / Dry CMH)	547 / 930	930 / 1580	530 / 900
Noise Level Indoor (high/ medium / low) in dB(A)	48 / 45 / 44	46 / 44 / 42	45 / 43 / 41
Features			
Modes	Dry / Cool / Auto / Fan / Turbo	Dry / Cool / Auto / Fan / Turbo	Dry / Cool / Auto / Fan / Turbo
Timer On / Off	Yes	Yes	Yes
Vertical Swing (up & down swing movement)	Auto	Auto	Auto
Horizontal Swing (left & right swing movement)	Auto	Auto	Auto
Auto Restart with memory function	Yes	Yes	Yes
Hygiene+ / Blow Self Clean	Yes	Yes	Yes
Anti Freeze	Yes	Yes	Yes
Self Diagnosis Error Codes	No	No	No
Display in IDU	No	No	No
5 in 1 Convertible	Yes	Yes	Yes
Lock	Yes	Yes	Yes
Clock	Yes	Yes	Yes
i-Sense	Yes	Yes	Yes
Filter Configuration	Pure Air Filter	Pure Air Filter	Pure Air Filter
Evaporator Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
Condenser Fins	Regular Fins	Regular Fins	Regular Fins
Expansion Device in ODU	EEV	EEV	Capillary
Dimensions, weight & input power supply			
Front Panel Colour (strip)	White	White	White
Net IDU dimension (W x H x D) cm	118.0 x 17.0 x 44.8	118.0 x 17.0 x 44.8	118.0 x 17.0 x 44.8
Gross IDU dimension (W x H x D) cm	142.0 x 24.0 x 53.0	142.0 x 24.0 x 53.0	142.0 x 24.0 x 53.0
Input Power Supply	Outdoor unit	Outdoor unit	Outdoor unit
Net Weight IDU (kg)	15.8	15.8	15.8
Gross Weight IDU (kg)	20.8	20.8	20.8
Net ODU dimension (W x H x D) cm	91.0 x 67.0 x 32.0	78.0 x 54.0 x 31.0	78.0 x 54.0 x 31.0
Gross ODU dimension (W x H x D) cm	102.5 x 74.5 x 43.3	92.0 x 61.0 x 40.5	92.0 x 61.0 x 40.5
Noise Level Outdoor in dB(A)	56.0	56.0	56.0
Net Weight ODU (kg)	39.1	28.0	27.0
Gross Weight ODU (kg)	44.1	32.0	30.0
Compressor			
Compressor Type	Twin Rotary Inverter	Twin Rotary Inverter	Twin Rotary Inverter
Compressor Warranty	10 Year	10 Year	10 Year
Acoustic Jacket on compressor	Yes	Yes	Yes
Refrigerant & ambient operations			
Refrigerant	R32	R32	R32
Max Ambient Temperature (cooling)°C	52	52	52

Note:

Note:

SERVICE ADVANTAGE

Extended product life with genuine spare parts

24x7 connect centre in 14 regional languages

4500+ app-enabled Godrej Smart Buddy technicians

Over 660 service centres

Service available up to 9 PM, even on weekends*

*Sunday working and up to 9 PM service is available in select cities.

Explore our wide range of home & office solutions: Advanced appliances, stylish furniture, smart security & locking solutions and more.

Air Conditioners

Refrigerators

Deep Freezers

Washing Machines

Dishwashers

Microwave Ovens

Insulicool

Air Coolers

Personal Food & Beverage Cooler

Bedroom

Living Room

Home storage

Kitchen

Mattress

Locks

Door Handles

Digital Locks

Rim Locks

Pad Locks

Architecture fittings and systems

Cabinet Hinges

Door Closers

Door Hinges

Patch Fittings (Glass Hardware)

Kitchen fittings and systems

Slim Ergo Drawers

Kitchen Baskets

SKIDO Organiser

Home Lockers

Home Cameras

Video Door Phones


Home Alarm Systems

Appliances

www.godrejenterprises.com/home-appliances

Interio

www.godrejenterprises.com/furniture

Locks & architectural fittings and systems

www.godrejenterprises.com/locks-and-security

Security solutions

www.godrejenterprises.com/locks-and-security

Godrej and Boyce Manufacturing Company Ltd. (a part of Godrej Enterprises Group)
Plant 11, Pirojshanagar, Vikhroli (W), Mumbai 400 079.

In view of Godrej policy of continuous development, features, specifications and colours are to change without prior notice.
Images are representative only. Colours depicted in this catalogue are as close to actual as modern printing process allows. All products are ROHS compliant.

Dealer's Stamp

125 years+ of brighter living

GBAD/GMR_CAT26/324/

Visit us at www.godrejenterprises.com/home-appliances godrejappliances godrejappliance godrejappliance