Richco

CLEANING GUIDE

CLEANING GUIDE

RICHCO BONDED STONE

To maintain an optimal performance of Richco Bonded Stone System, establishing an appropriate cleaning regime is crucial. Richco recommends a daily cleaning in these high trafficked areas.

REGULAR CLEANING

1. Sweep or vacuum the floor regularly to remove loose debris, dirt, and gravel as this can cause wear and tear on your rubber flooring over time.
2. Hose down the surface to remove any build-up of dirt or grime. Be sure to let it dry completely after hosing to prevent slips.
3. A mild cleaning agent such as a PH neutral detergent or alternatively use a basic cleaning soultion of mild dish washing liquid or half and half of white vinegar mixed with water.
4. Once solution has been poured onto the surface it can be scrubbed with a soft broom in circular motion to agitate and clean the surface. (do not use a hard broom for cleaning as it may cause damage to rubber surface).
5. Remove dirty water with a wet vacuum or squeegee if cleaning by hand.

Disclaimer: Richco will not be held responsible for the incorrect cleaning procedures resulting in damage to the Bonded Stone System & the non-slip performance of the surface.

info@richcogroup.com 1-888-848-4157

SPOT CLEANING/ SPILLAGES

It is important that spillages are immediately cleaned from the surface as follows:

1. Wipe up spillage with towels or paper towels and dispose of properly. It is important to not allow spillages to sit on the floor surface for too long.
2. Vacuum or Sweep any large pieces of debris from the area.
3. Do not use any harsh chemicals on your bonded stone system to remove sticky stuff, this could cause damage. Instead use a PH Neutral detergent (as per manufacturer's instructions) or a basic cleaning solution of dish washing liquid, half and half of white vinegar mixed with water.

CHEWING GUM REMOVAL

(THIS SHOULD BE BANNED FROM THE PARKS)

It is important that chewing gum is removed from the Bonded Stone System immediately (whilst it is still in its soft / pliable state) or during the nightly clean. Use a chewing gum removal product (typically a citrus based product) which is spray applied onto the chewing gum and cleaning cloth. Leave the cloth (saturated with the chewing gum removal product) on top of the chewing gum to soak. Use a soft plastic scraper (DO NOT USE A METAL SCRAPER ON THE SURFACE) to remove the chewing gum. Use a clean cloth to remove any remaining residue of the gum and cleaning product. After removal of the chewing gum – use water with a PH neutral cleaner and clean the surface as normal.

DO NOT use a zero-point power washing to remove chewing gum – this will result in damages to our flooring systems

CLEANING CHEMICALS

Richco recommends the use of a PH neutral (diluted as per manufacturer's instructions) or a basic cleaning solution of dishwashing liquid, half and half of white vinegar mixing with water. Harsh detergents and bleach are not recommended as it will cause damage to the synthetic grass.Never use solvents on the Rubber Top / Rubber Mulch System.

PRESSURE WASHING

INDOOR

Pressure washing is not recommended and should not be required if a daily cleaning routine is established (as above). If pressure washing is to take place, please use the following precautions:

1. Use low pressure of between 200-400 psi only – which is enough pressure to dislodge any debris and clean the surface, but not too much to chip or damage the System.
2. Direct water at an angle of 25° (with correct nozzle). 0° from a high-pressure water jet will damage the top and underlying surface.
3. It is important to keep the nozzle of the water jet 12" from the surface to avoid damage.

OUTDOOR

After cleaning the surface with the cleaning agent, the surface can also be pressure washed to clean the surface. Please use the following precaution during pressure washing:

1. Use low pressure of between 400 – 800 psi only – which is enough pressure to dislodge any debris and clean the surface, but not too much to chip or damage the system.
2. Direct water at an angle of 25° (with correct nozzle). 0° from a high-pressure water jet will damage the top and underlying surface.
3. It is important to keep the nozzle of the water jet 12" from the surface to avoid damage.

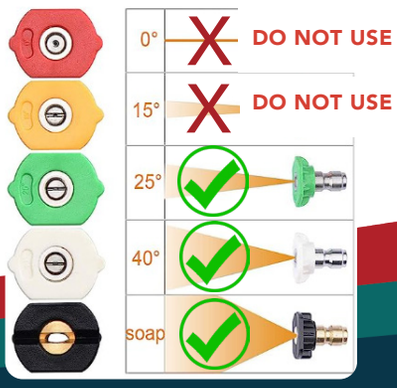

CORRECT NOZZLES & ANGLES

CORRECT DISTANCE

Richco
INTERNATIONAL

www.richcogroup.com
info@richcogroup.com
+1 888 848 4157