Richco

CLEANING GUIDE

CLEANING GUIDE

RICHCO DECORATIVE CONCRETE MOSAIC SYSTEM

To maintain an optimal performance of Richco Decorative Concrete Mosaic System, establishing an appropriate cleaning regime is crucial. Richco recommends a daily cleaning in these high trafficked areas.

SCRUBBER / DRYER MACHINE METHOD OF CLEANING

The use of a Scrubber / Dryer Machine is Richco's preferred method of cleaning large internal spaces on our Richco Decorative Concrete Mosaic System. This method of cleaning is easier, quicker, and more hygienic than manual floor cleaning and provides the best result on our flooring systems.

Prior to using the scrubber / dryer machine, sweep or vacuum the floor to remove loose debris or dirt.

It is important that the Scrubber / Dryer Machine is filled with water and the correct diluted cleaning fluids are used as per the manufacturer's instructions. We recommend the use of a PH neutral cleaner (on matte finishes) or a diluted citrus based cleaning agent, detergent, deodorizer, degreaser, or emulsifier (diluted into water as per the manufactures instructions).

MANUAL METHOD OF CLEANING

1. Sweep or vacuum the floor to remove loose debris or dirt.
2. We would recommend the use of a PH neutral cleaner (on matte finishes) or a citrus based cleaning agent, detergent, deodorizer, degreaser, or emulsifier diluted into water as per manufacturer's instructions.
3. Place the solution onto floor surface and agitate by hand using a stiff brush (by scrubbing motion).
4. Flood the surface with clean water and scrub.
5. Remove dirty water with squeegee (or with wet vacuum).
6. Dispose of contaminated water whilst paying special attention to the by-law regulations which prohibit the introduction of certain chemicals into surface water drains or sewer systems.

For floors with a matte finish only use a PH Neutral Cleaner!

Disclaimer: Richco will not be held responsible for the incorrect cleaning procedures resulting in damage to the Richco Decorative Concrete Mosaic Flooring System.

SPOT CLEANING/ SPILLAGES

It is important that spillages are immediately cleaned from the surface as follows:

1. Wipe up spillage with towels or paper towels and dispose of properly. It is important to not allow spillages to sit on the floor surface for too long.
2. Vacuum / Wet Vacuum or Sweep the small area of floor that has the spillage or needs spot cleaning.
3. For stubborn stains clean with a PH Neutral cleaner (diluted as per the manufacturer's instructions).
4. Clean the small area with a mop and clean warm water to spot clean or remove the residue from the spillage.

CHEWING GUM REMOVAL

(THIS SHOULD BE BANNED FROM THE PARKS)

If chewing gum is found on the floor surface - this should be removed immediately (whilst it is still in its soft / pliable state) or during the nightly clean. Use a chewing gum removal product (typically a citrus based product) which is spray applied onto the chewing gum and cleaning cloth. Leave the cloth (saturated with the chewing gum removal product) on top of the chewing gum to soak. Use a soft plastic scraper (DO NOT USE A METAL SCRAPER ON THE SURFACE) to remove the chewing gum. Use a clean cloth to remove any remaining residue of the gum and cleaning product. After removal of the chewing gum – use water with a PH neutral cleaner and clean the surface as normal.

DO NOT use a zero-point power washing to remove chewing gum – this will result in damages to our flooring systems

CLEANING CHEMICALS

Richco recommends the use of a citrus based cleaner for routine cleaning.
Important: Dilute chemicals as per manufacturer guidelines. If used in wrong concentrations, could cause an adverse effect on the floor.
Harsh detergents and bleach are not recommended, as it will cause the color to fade after a period of prolonged use.

PRESSURE WASHING

INDOOR

Pressure washing is not recommended for internal use and should not be required if a daily cleaning routine is established (as above). If pressure washing is to take place, please use the following precautions:

1. Use low pressure of between 400 – 600 psi only – which is enough pressure to dislodge any debris and clean the surface, but not too much to chip or damage the system.
2. Direct water at an angle of 25° (with correct nozzle). 0° from a high-pressure water jet will damage the top and underlying surface.
3. It is important to keep the nozzle of the water jet 12" from the surface to avoid damage.

OUTDOOR

After cleaning the surface with the cleaning agent, the surface can also be pressure washed to clean the surface. Please use the following precaution during pressure washing:

1. Use low pressure of between 400 – 600 psi only – which is enough pressure to dislodge any debris and clean the surface, but not too much to chip or damage the system.
2. Direct water at an angle of 25° (with correct nozzle). 0° from a high-pressure water jet will damage the top and underlying surface.
3. It is important to keep the nozzle of the water jet 12" from the surface to avoid damage.



CORRECT NOZZLES & ANGLES

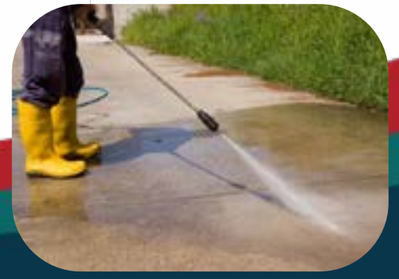

CORRECT DISTANCE

Richco
INTERNATIONAL

www.richcogroup.com
info@richcogroup.com
+1 888 848 4157