FB Basic type for blind bores

We recommend version PG for BMD type FB (see 84)

FB6 Ø 7,0 - 16,0 mm


Nominal diameter range: above 7.0 - 16.0 mm

Nom. diameter Ø 7.0 - 16.0
Ø Z = Nom. diameter - 0.02 / - 0.04

Sample order:

Bore	Order Code
9 K8	BMD-FB6-CR-8.984

Contact points only available in MHM or MCR

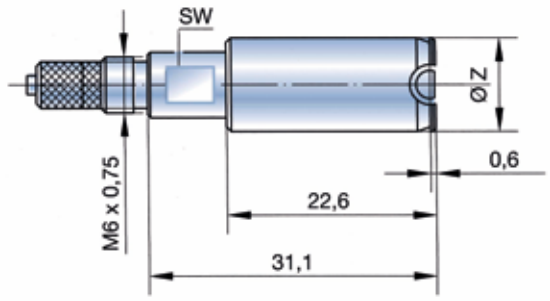

FB10 Ø 15,0 - 44,0 mm

Nominal diameter range: above 15.0 - 44.0 mm


Nom. diameter Ø 15.0 - 32.0
Ø Z = Nom. diameter - 0.02 / - 0.05

Nom. diameter Ø > 32 - 44.0
Ø Z = Nom. diameter - 0.03 / - 0.06

Sample order:

Bore	Order Code
42 K8	BMD-FB10-CR-41.973

Contact points only available in MHM or MCR

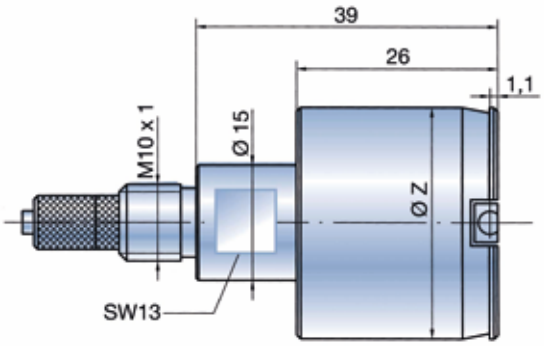

FB10 > Ø 44,0 - 70,0 mm


Nominal diameter range: above 44.0 - 70.0 mm

Ø Z = Nom. diameter - 0.03 / - 0.06

Sample order:

Bore	Order Code
60 JS8	BMD-FB10-CR-59.977

Contact points only available in MHM or MCR

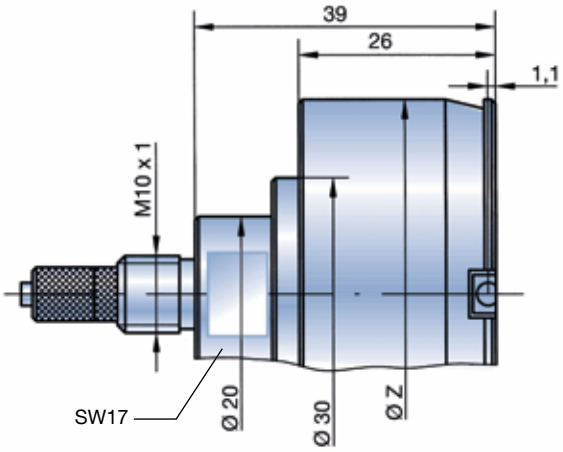

FB10 > Ø 70,0 - 150,0 mm

Nominal diameter range: above 70,0 - 150,0 mm


Ø Z = Nom. diameter - 0.04 / - 0.07

Sample order:

Bore	Order Code
100 H7	BMD-FB10-CR-100.00

Contact points only available in MHM or MCR

Nominal diameters over Ø 150 mm on request

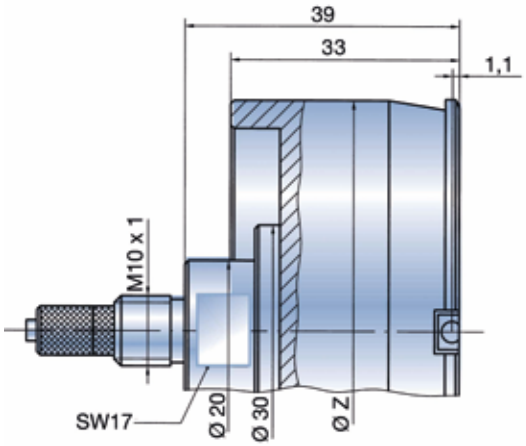

Special-purpose plug gauges are designed to meet specific customer needs. These include either customized products (indicated by “on request”) or modifications of basic cylinder types (indicated by “extra charge”).

All special types must be specifically requested. Your request should include a precise description of the measurement problem and a reliable drawing illustrating the measurement problem. A sample workpiece may be necessary in some cases.

S-FB

BMD for blind bores (extra charge)

In order to measure closer to the bottom of the bore, the guide cylinder of type S or FB is shortened.

L1-dimensions that lie between the minimum length L1 and the standard must be indicated in the order.

Type S
Nom. diameter range: Ø 4.0 - 270.0 mm

Advantages of type S-FB
The large gauging radii of type S are used. This facilitates insertion of the plug gauge into the bore and helps to reduce wear.

Ø Z = nom. diameter same as for type S. L2 same as for type S

BMD gauge type	Min. length L1
Series 4	0.6 mm (Ø 4.0 and above*)
Series 6	1.6 mm
Series 10	2.4 mm

*) for Ø < 4,0 type T-BMD-FB can be realized
Series 10 – 3P: L1=3.0
Series 6 – 3P: L1=2.0


FB-S-FB
Nom. diameter range: 15.0 – 150.0 mm

Ø Z = nom. diameter as in type FB.
Minimum length L1 = 0.5 mm.
At L1 = 0.5 mm, the gauging contact has a sharp edge, which results in heavier wear. If the workpiece is also sharp-edged, Option PG should be used (84). Available only in type BMD-FB10.

Order suffix: S-FB

Sample order:

Bore	Order Code
28 H7 requested L1 = 3.0	BMD-S10-CR-28.0- S-FB-L1 = 3.0

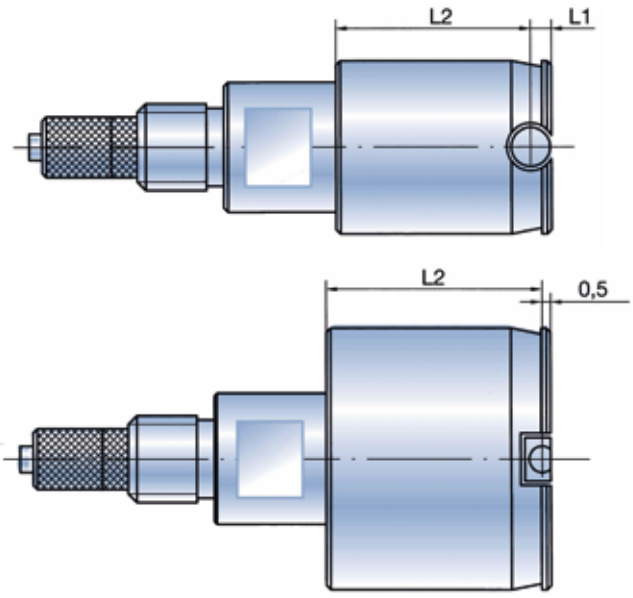

OR

BMD without entry groove
(no extra charge)


When used in very short bores, the entry groove cancels out most or all of the guide function.

Order suffix: OR

Sample order:

Bore	Order Code
30 H6	BMD-S10-CR-30.0- OR-chamfer 0.5 x 45°

In this case, use of an entry groove is not recommended.
The cylinder should be bevelled in order to prevent jamming.
Basic types: S, D, FB, S-FB, L

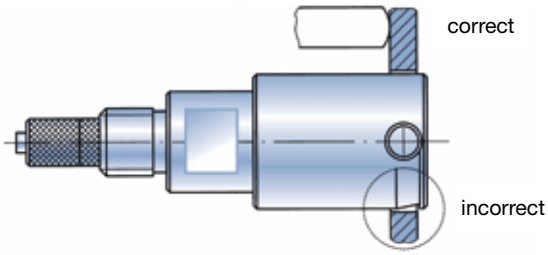

UM

BMD with reduced entry diameter
(extra charge)

Nom. diameter range: 7.9 – 270 mm
The BMD can be inserted to the end of the front cylinder before the finished dimension is reached, thus making it possible to gauge the machine stop point. The entire BMD can be inserted into the bore beyond the finished dimension.

Basic types: S, D Order suffix: UM

Sample order:

Bore	Order Code
30 H7	BMD-S10-CR-30.0-UM

