
PART NO.
TGM-61-247A-xx△2

△5 REV.

$\sqrt{Rt=12}$ (~)

△2 ITEM	øD	△4 △5 Mat'l ☑ Tickby User	CHECK
-01	ø4.5 $^{\pm0.05}$	☐ SUS304 ☐ SUS303	
-02	ø4 $^{\pm0.05}$	☐ SUS304 ☐ SUS303	
-03	ø4.78 $^{\pm0.05}$	☐ SUS304 ☐ SUS303	
-04	ø4 ±0.05	☐ SUS304 ☐ SUS303	
-05	ø2.53 $^{0}_{-0.03}$	☐ SUS304 ☐ SUS303	RQ: 502/18

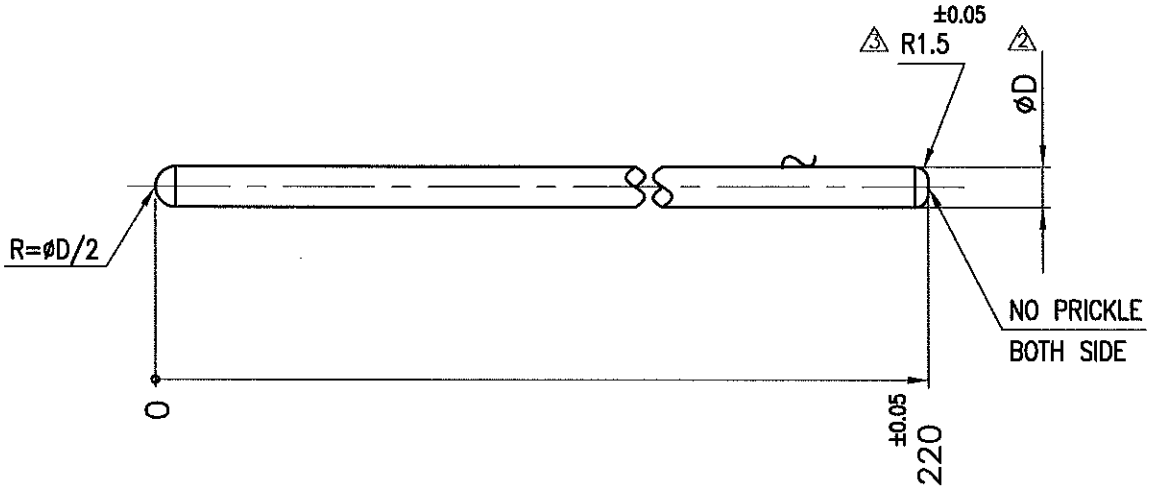

NOTE: 1. BREAK ALL CORNER NO SHARP EDGE.
2. GENERAL TOLERANCE ±0.1

USE WHIT BRG. TRAY NO. TGM-52-076L

MinebeaMitsumi Inc.
Copy issued Uncontrolled
1/7/2568
Engineering Design center
G/M.1 & M/A. Div.

REV.	ECN NO.	DATE	NAME	DESCRIPTION
1	------	------	---	ENGINEERING RELEASE
2	------	12 NOV'08		CH : ø4.5 => øD
3	------	18 JUN'09		CH : R=øD/2 => R1.5
4	------	17 DEC'09		CH : SUS304 => SEE TABLE
5	------	14 SEP'18		CH : Mat'l => Mat'l ☑ RQ:502/18

UNLESS SPECIFIED C0.1 OR R0.1 GENERAL TOLERANCE JISB0405 MACHINING WORKING	
LESS THAN 0.5	±0.05
0.5 ~ 6	±0.1
6 ~ 30	±0.2
30 ~ 120	±0.3
120 ~ 400	±0.4
400 ~ 1000	±0.8
ANGLE	±1°

0.8S 6.3S 25S 100S ~ UNCUT

M/C: — Q'ty —
MATERIAL: SEE TABLE △4
FINISH: —
HEAT TREATMENT: —

LIST REQUEST NO. —
3 RD ANGLE
SCALE — SHEET / UNIT (mm)

DETAILED	DESIGNED	CHECKED	APPROVED
CHONKNOK			

DATE : 6 MAY'98

NMB MinebeaMitsumi Inc.
General Machining Parts Div. 1

TITLE: STICK PART FOR BEARING TRAY

PART NO. TGM-61-247A-xx△2 △5 REV.