

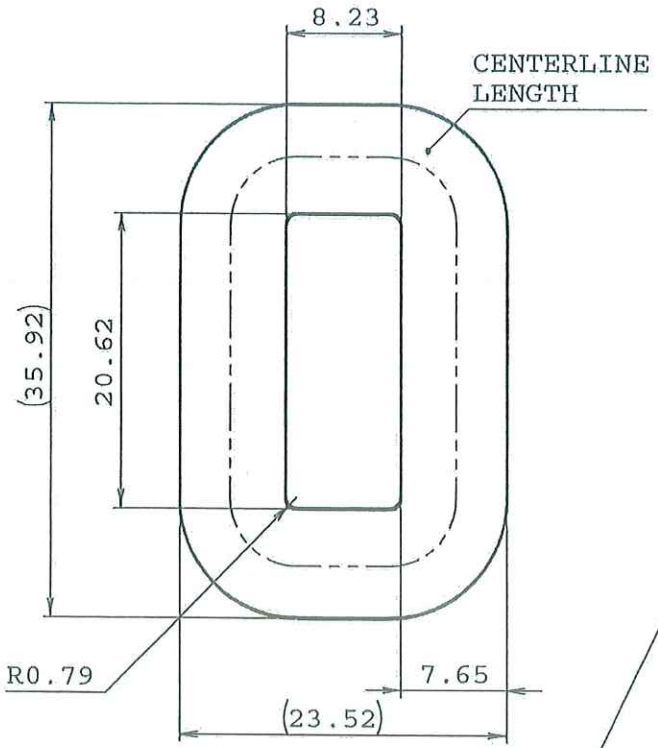


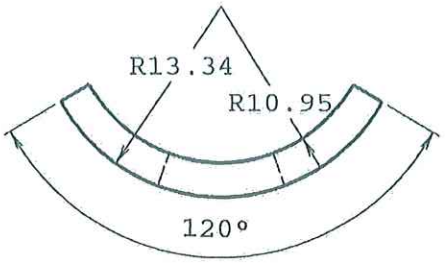

START AND END LEADS
EXIT THIS REGION
LEAVE 3" EXTRA LENGTH
tin applied to 1/4"on ends

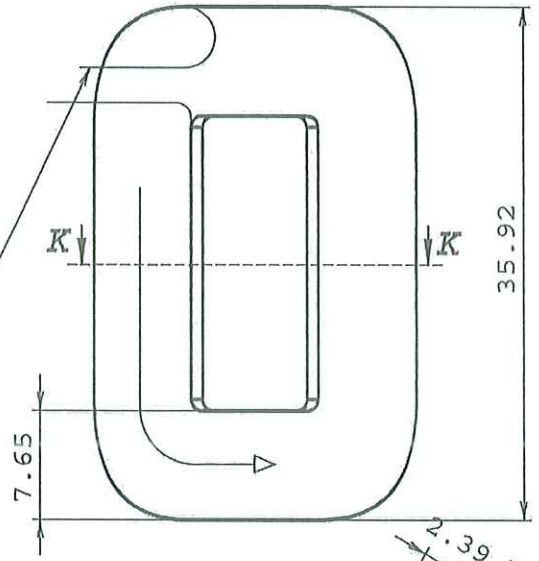

START/END LEADS
TO OUTSIDE OF BEND

SECTION K-K

COIL AFTER FORMING


Minebea
Copy
12 JUN 2...
Issued
G/M and M/A Div.
Uncontrolled

NOTES:

MATERIAL: POLYURETHANE BONDABLE 180° C OR GREATER
INSULATED COPPER WIRE (#31.5 AWG)
BONDCOAT KANTHAL XTC

PHYSICAL PROPERTIES:
NUMBER OF TURNS 270 +/- 1
WINDING DIRECTION AS SHOWN
RESISTANCE: 11 OHM AT 23°C
MASS 7.5 GRAMS

LENGTH = CENTERLINE LENGTH x NUMBER OF TURNS
= 3.16" x 270 = 854.4" = 71.2 feet



REV.	ECN.NO.	DATE	NAME

UNLESS SPECIFIED	
C0.2 Max OR R0.2 Max (NO DENT & NO BURR)	
GENERAL TOLERANCE	
JISB0405 MACHINING WORKING	
LESS THAN 6	±0.1
6 ~ 30	±0.2
30 ~ 120	±0.3
120 ~ 400	±0.5
400 ~ 1000	±0.8

0.8 / 6.3 / 25 / 100 / ▽ / Angle ±1°

M/C.	OTHER	Qty.	40
MATERIAL	SEE NOTE		
FINISH	-		
HEAT TREATMENT.	-		

Minebea
Mechanical Ass'y DIV.

UNIT (mm.)	3RD ANGLE	SCALE : FREE

DETAILED	DESIGNED	CHECKED	APPROVED
Pinij	Pinij		

DATE 18-02-2016 | UP DATE

TITLE: BEARING TESTER COIL 3.5

DWG.NO: TMA-10-S1978

REV.: NR

SHEET: 1 OF 1