

3.2 (1.6 0.4 G)



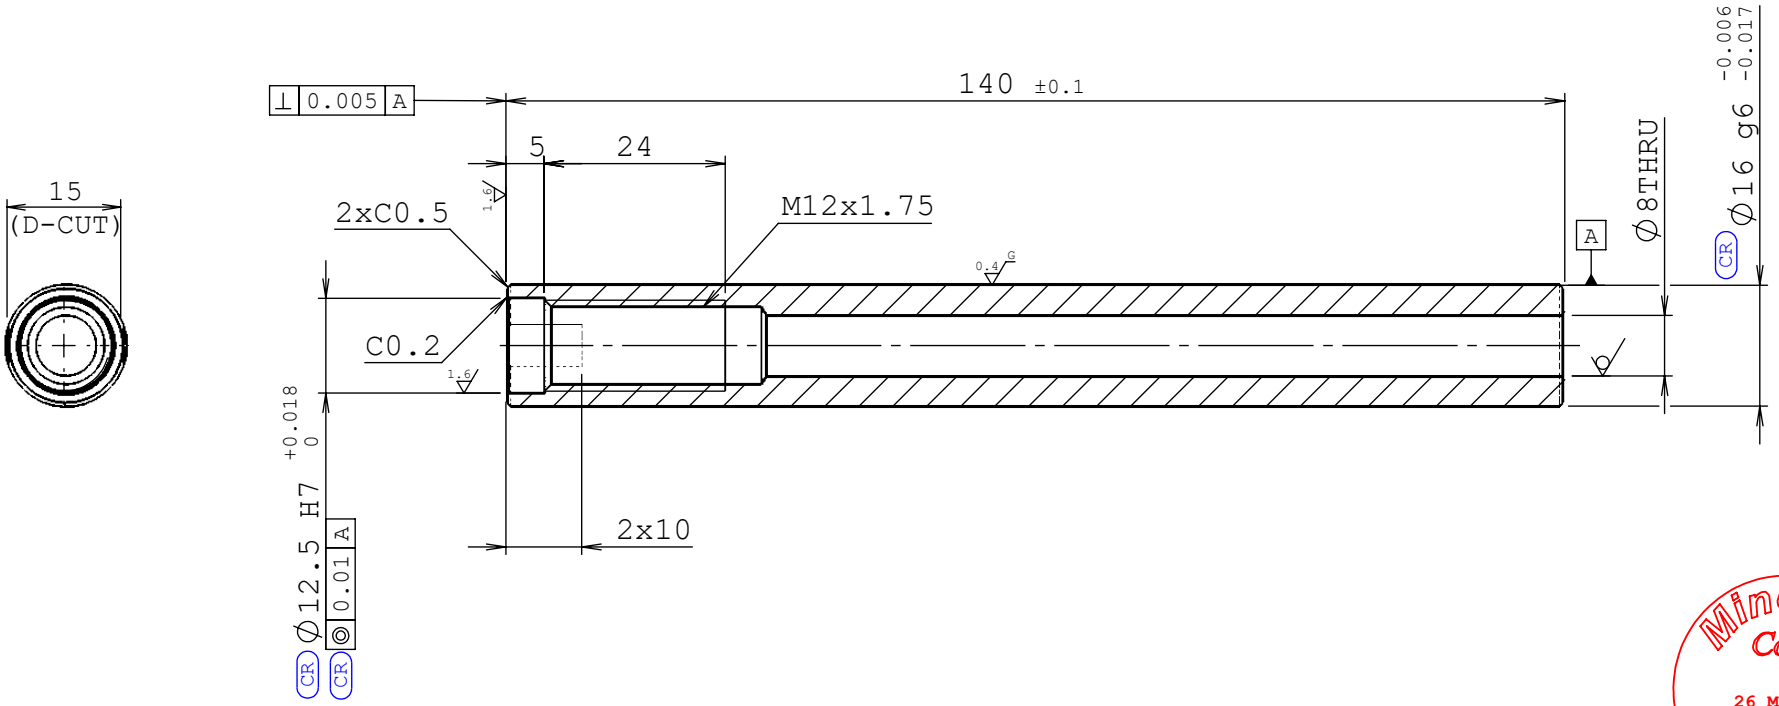

Minebea Copy
26 MAR 2026
Issued G/M and M/A Div.
Uncontrolled

Note : No Origano-silicone can be use in manufacturing process and tooling.
if The use of these material is unvoidabel , prior written approval from NMB is requied.
Hard Chrome Plating in ID & OD Shaft

CR :Critical parameter

UNLESS SPECIFIED C0.2 Max OR R0.2 Max (NO DENT & NO BURR)		M/C. HCP-A,BK	Qty. -	NMB MinebeaMitsumi Inc. Mechanical Ass'y DIV.			TITLE Shaft A
GENERAL TOLERANCE JISB0405 MACHINING WORKING		MATERIAL SUJ2		UNIT (mm.)	3RD ANGLE	SCALE : FREE	
LESS THAN 6	±0.1	FINISH Hard Chrome Plating		DETAILED THONGCHAI	DESIGNED THONGCHAI	CHECKED ARTIT	APPROVED ARTIT
6 ~ 30	±0.2	HEAT TREATMENT. Quenching HRC58~		DATE 17 Aug 2025	UP DATE	DWG.NO TMA-20-0149A	REV. NR
30 ~ 120	±0.3					SHEET: 1 OF 1	
120 ~ 400	±0.5						
400 ~ 1000	±0.8						

DETAIL NAME DATE ECN.NO. REV.