~

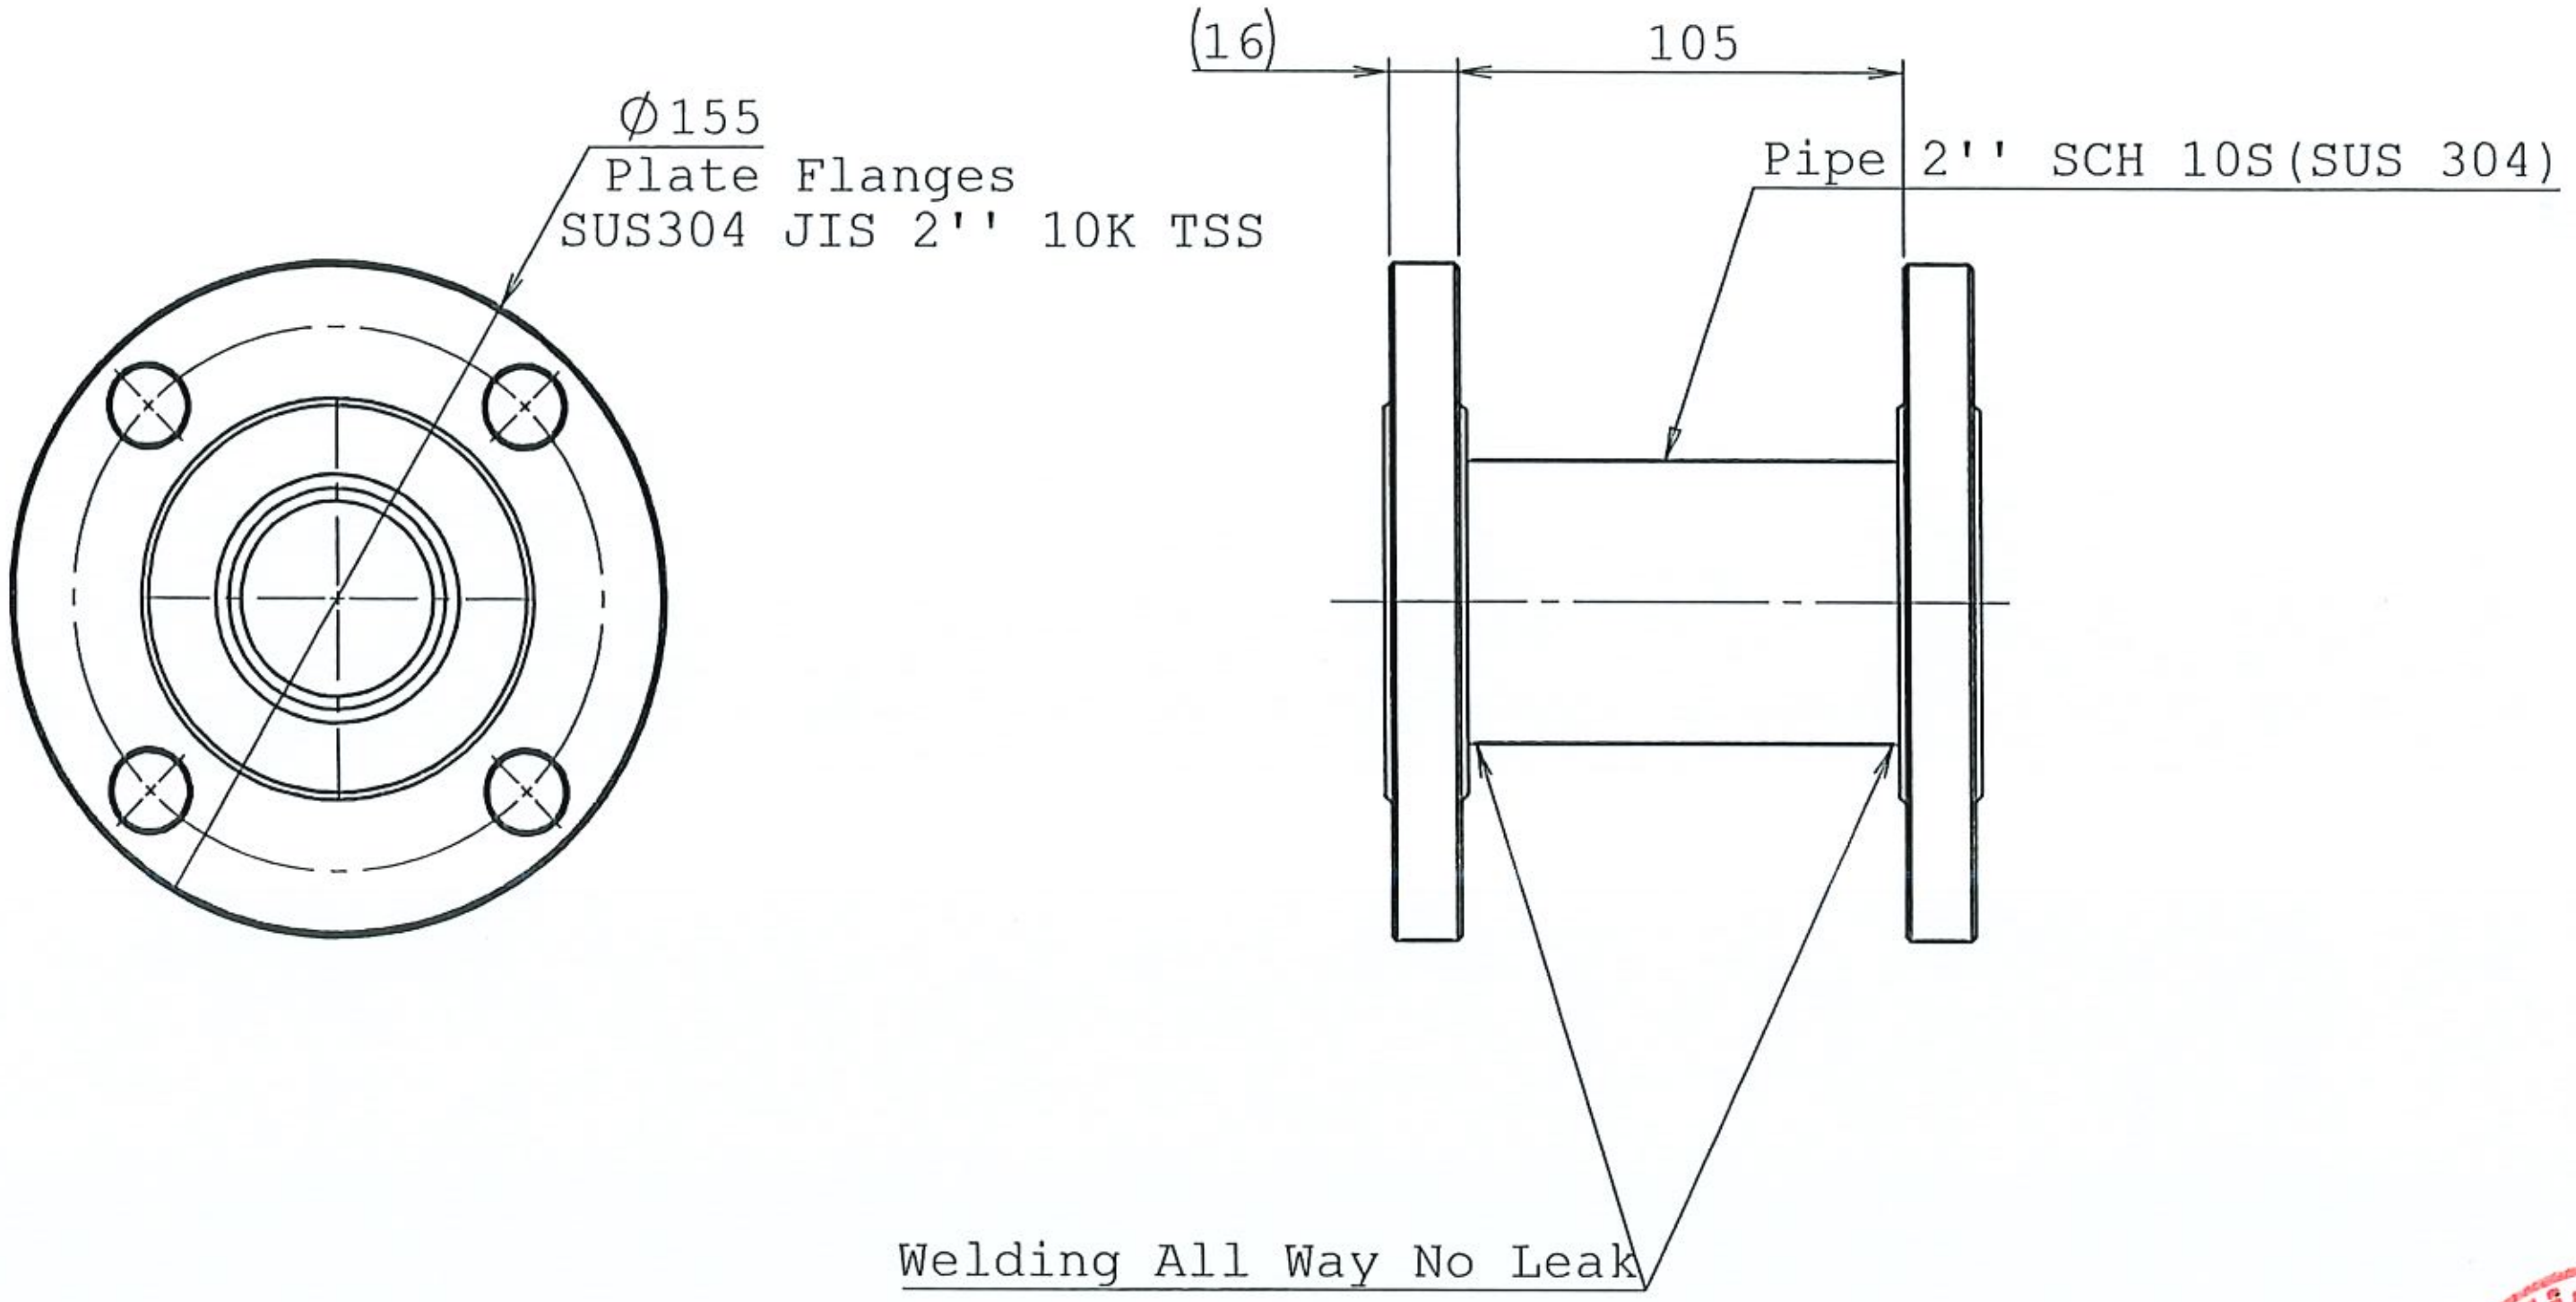

Minebea
Copy
11 APR 2025
Issued
G/M and M/A Div.
Uncontrolled

Note : No Origano-silicone can be use in manufacturing process and tooling.
if The use of these material is unvoidabel , prior written approval from NMB is requied.

DETAIL
NAME
DATE
ECN.NO.
REV

UNLESS SPECIFIED C0.2 Max OR R0.2 Max (NO DENT & NO BURR)		0.8	**M/C.** OTHER	**Qty.** –
GENERAL TOLERANCE		6.3	**MATERIAL** –	
JISB0405 MACHINING WORKING		25		
LESS THAN 6	±0.1	100	**FINISH** –	
6 ~ 30	±0.2			
30 ~ 120	±0.3		**HEAT TREATMENT.**	
120 ~ 400	±0.5	Angle ± 1°		
400 ~ 1000	±0.8			

NMB MinebeaMitsumi Inc.
Mechanical Ass'y DIV.

UNIT (mm.)	3RD ANGLE	SCALE : FREE	**TITLE** Pipe&Flanges		
DETAILED THONGCHAI	**DESIGNED** THONGCHAI	**CHECKED** ARTIT	**APPROVED** ARTIT	**DWG.NO** TMA-80-0074	**REV.** NR
DATE 2-04-2025		**UP DATE**		SHEET: 1 OF 1	

KITZ

KELMO® EX Series

Electric Actuators for Ball and Butterfly Valves

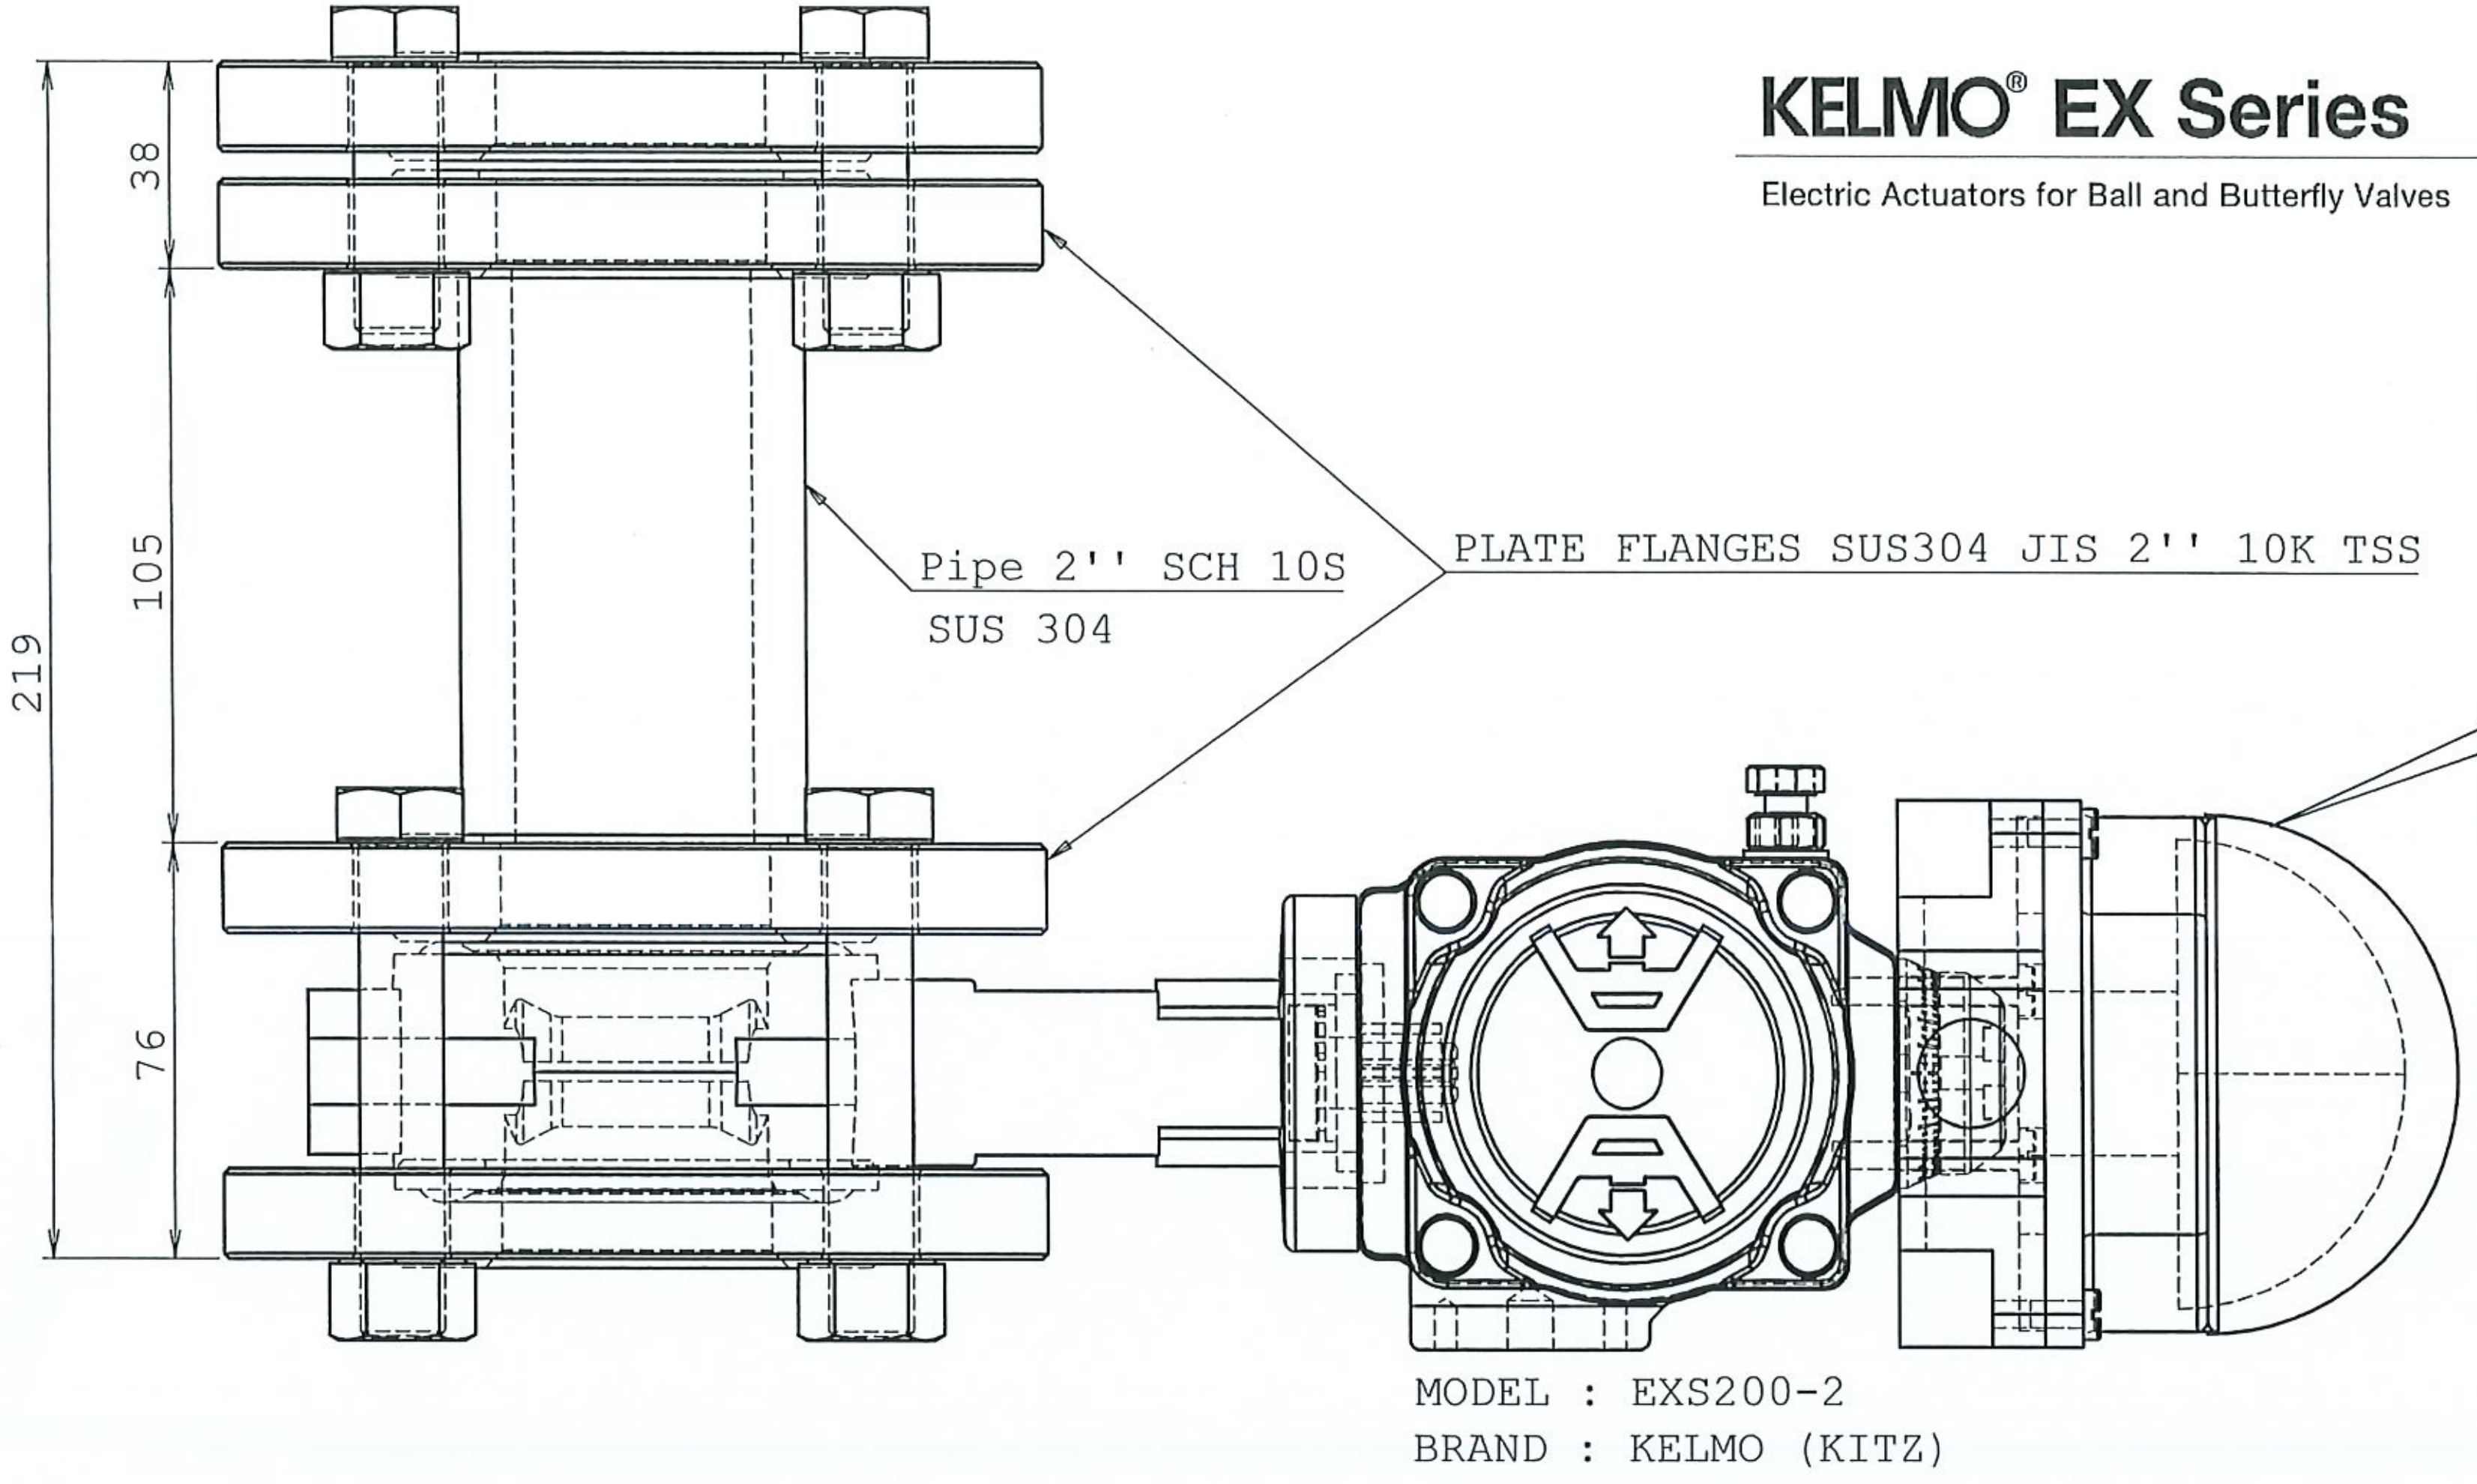

MODEL : EXS200-2
BRAND : KELMO (KITZ)

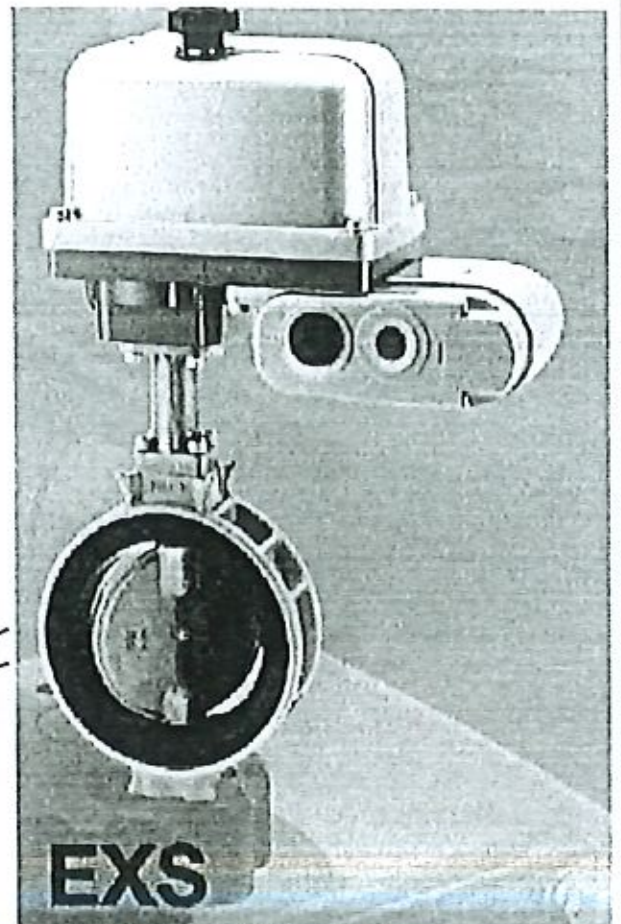

EXS

Low-speed Actuator for Butterfly Valves
Suitable for valve opening/closing operations which requires high output torque at low speed. Actuator is equipped with self-locking device on the output shaft. Special type for ball valve is available.

Minebea
Copy
1 1 APR 2025
Issued
C/M and MA Div.
Uncontrolled

Note : No Origano-silicone can be use in manufacturing process and tooling.
if The use of these material is unvoidabel , prior written approval from NMB is requied.

UNLESS SPECIFIED C0.2 Max OR R0.2 Max (NO DENT & NO BURR)		0.8∇	M/C. OTHER | Qty. –
GENERAL TOLERANCE		6.3∇	
JISB0405 MACHINING WORKING		25∇	MATERIAL –
LESS THAN 6	±0.1	100∇	FINISH –
6 ~ 30	±0.2		
30 ~ 120	±0.3		HEAT TREATMENT.
120 ~ 400	±0.5	Angle ± 1°	
400 ~ 1000	±0.8		

NMB MinebeaMitsumi Inc.
Mechanical Ass'y DIV.

UNIT (mm.)	3RD ANGLE	SCALE : FREE	**TITLE** Batterfly valve detail pipe	
DETAILED THONGCHAI	**DESIGNED** THONGCHAI	**CHECKED** ARTIT	**APPROVED** ARTIT	**DWG.NO** TMA-80-0074-XX
DATE 2-04-2025		**UP DATE**		SHEET: 1 OF 1
				REV. NR

DATE	NAME	DETAIL

REV	ECN.NO.