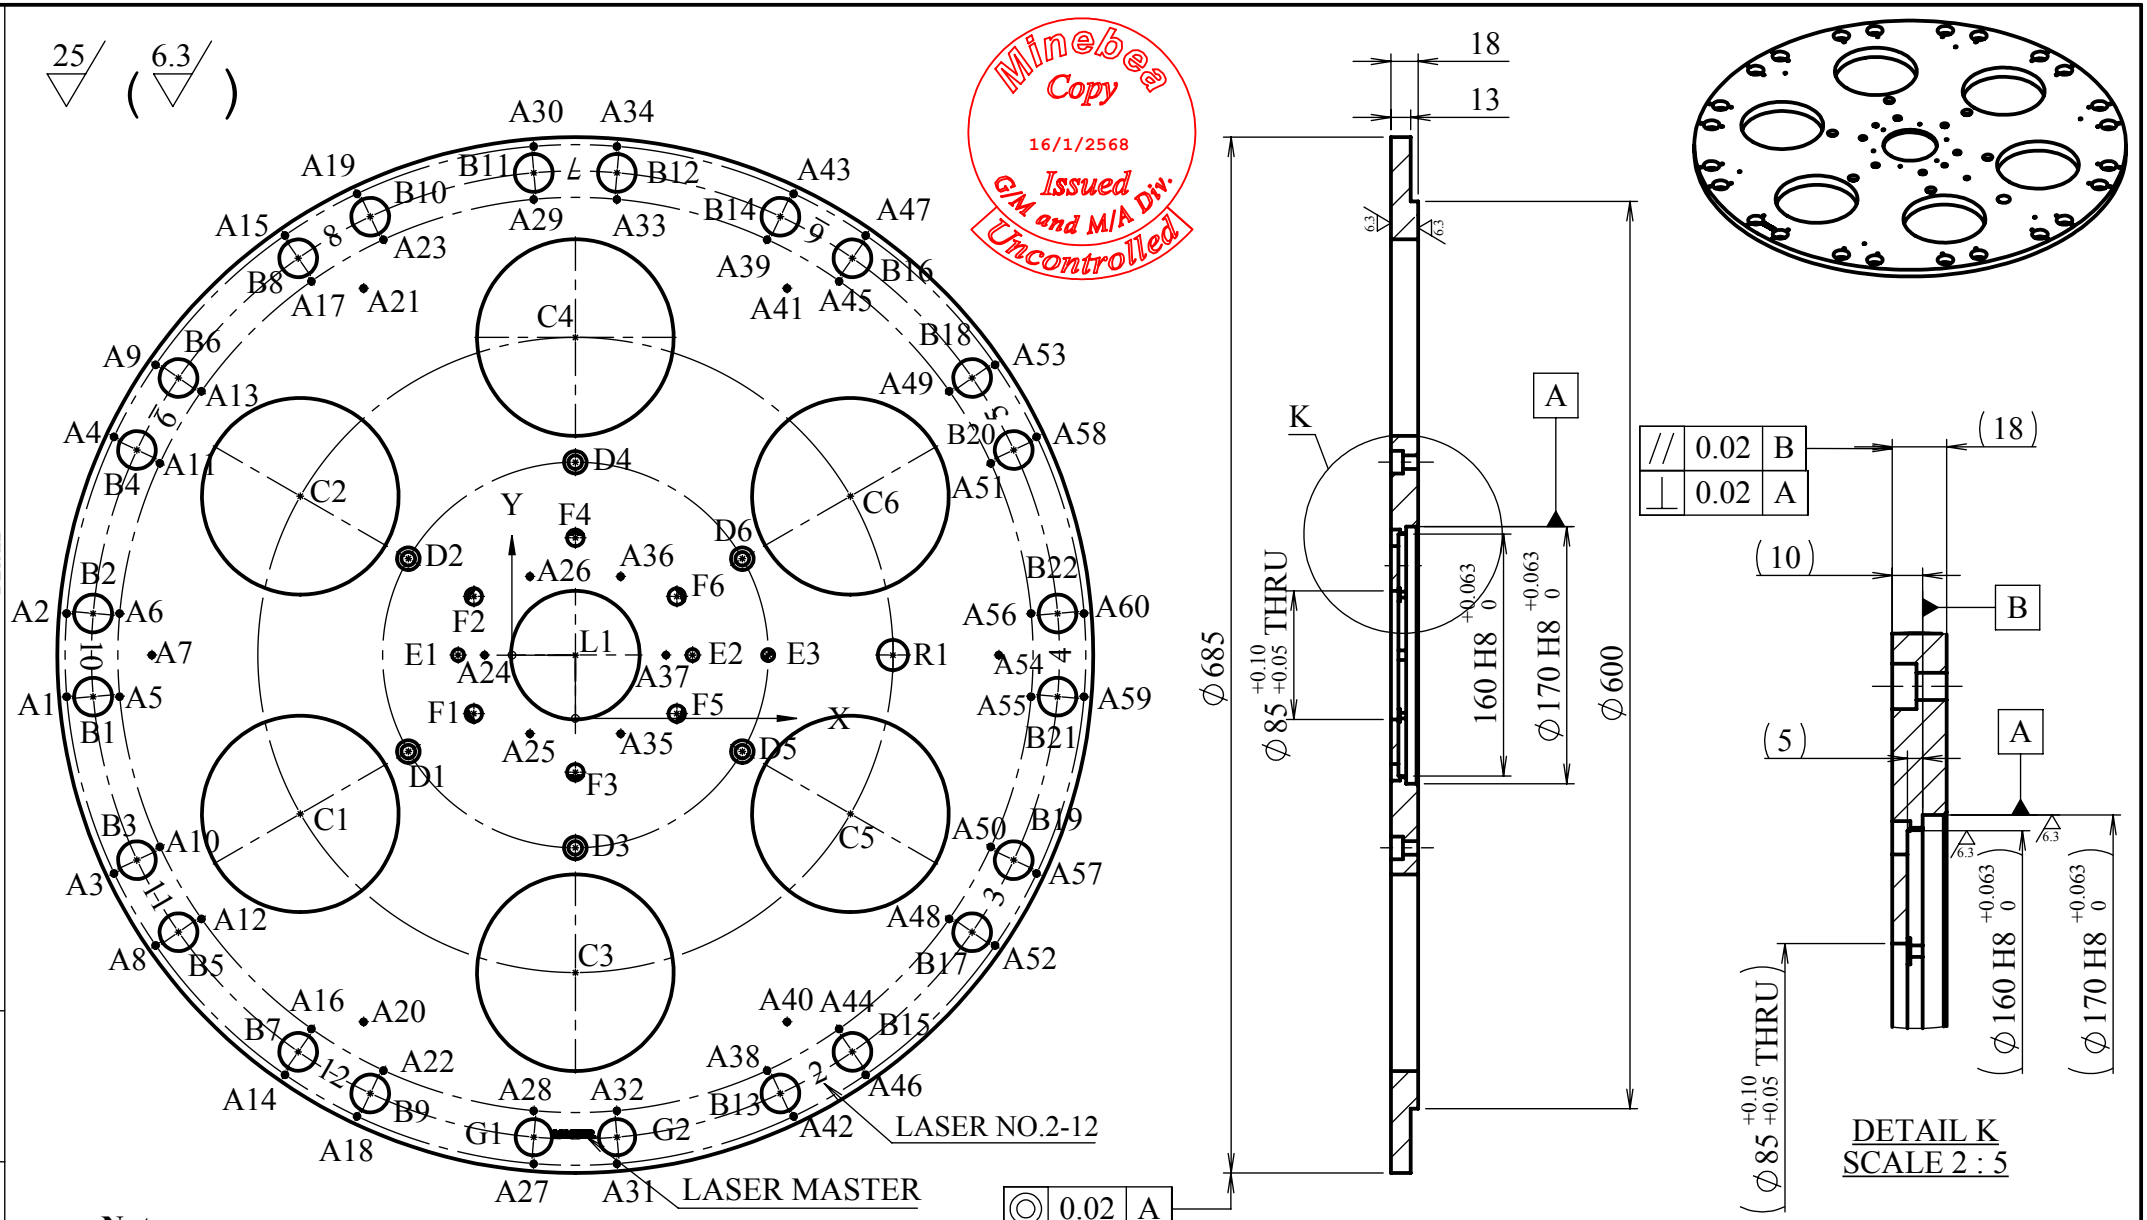


Note : **No Organo-silicone can be use in manufacturing process and tooling. if The use of these material is unvoidabel , prior written approval from NMB is required.**

UNLESS SPECIFIED C0.2 Max OR R0.2 Max (NO DENT & NO BURR)		0.8	M/C. ATVH2	Qty. -	NMB MinebeaMitsumi Inc. Machanical Ass'y DIV.	TITLE BASE INDEX (A)
GENERAL TOLERANCE JISB0405 MACHINING WORKING		6.3	MATERIAL A6063		UNIT (mm.) 3RD ANGLE SCALE : FREE	
LESS THAN 6	±0.1	25	FINISH CLEAR ANODIZE		DETAILED THONGCHAI / DESIGNED THONGCHAI / CHECKED ARTIT / APPROVED ARTIT	DWG.NO TMA-95-0036-01A
6 ~ 30	±0.2	100			DATE 5-01-2024 / UP DATE	SHEET: 1 OF 3
30 ~ 120	±0.3		HEAT TREATMENT. -			REV. NR
120 ~ 400	±0.5	Angle ± 1°				
400 ~ 1000	±0.8					

DETAIL / NAME / DATE / ECN.NO. / REV.

TAG	X LOC	Y LOC	SIZE
A1	-336.32	-27.50	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A2	-336.32	27.50	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A3	-305.01	-144.34	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A4	-305.01	144.34	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A5	-301.32	-27.50	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A6	-301.32	27.50	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A7	-280	0	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A8	-277.51	-191.97	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A9	-277.51	191.97	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A10	-274.70	-126.84	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A11	-274.70	126.84	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A12	-247.20	-174.47	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A13	-247.20	174.47	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A14	-191.97	-277.51	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A15	-191.97	277.51	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A16	-174.47	-247.20	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A17	-174.47	247.20	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A18	-144.34	-305.01	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A19	-144.34	305.01	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A20	-140	-242.49	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A21	-140	242.49	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A22	-126.84	-274.70	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A23	-126.84	274.70	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A24	-60	0	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A25	-30	-51.96	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A26	-30	51.96	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A27	-27.50	-336.32	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A28	-27.50	-301.32	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A29	-27.50	301.32	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A30	-27.50	336.32	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A31	-27.50	-336.32	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A32	-27.50	-301.32	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A33	-27.50	301.32	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A34	-27.50	336.32	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A35	-30	-51.96	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A36	-30	51.96	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A37	-60	0	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A38	126.84	-274.70	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A39	126.84	274.70	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A40	140	-242.49	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A41	140	242.49	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A42	144.34	-305.01	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A43	144.34	305.01	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A44	174.47	-247.20	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A45	174.47	247.20	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A46	191.97	-277.51	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A47	191.97	277.51	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A48	247.20	-174.47	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A49	247.20	174.47	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A50	274.70	-126.84	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A51	274.70	126.84	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL

Note : **No Organo-silicone can be use in manufacturing process and tooling.**
if The use of these material is unvoidabel , prior written approval from NMB is required.

Minebea Copy
16/1/2568
Issued G/M and M/A Div.
Uncontrolled

DETAIL | NAME | DATE | ECN.NO. | REV.

UNLESS SPECIFIED	
C0.2 Max OR R0.2 Max (NO DENT & NO BURR)	
GENERAL TOLERANCE	
JISB0405 MACHINING WORKING	
LESS THAN 6	±0.1
6 ~ 30	±0.2
30 ~ 120	±0.3
120 ~ 400	±0.5
400 ~ 1000	±0.8

0.8 / 6.3 / 25 / 100 / ▽ / Angle ± 1°

M/C. ATVH2 | Qty. -

MATERIAL A6063

FINISH CLEAR ANODIZE

HEAT TREATMENT. -

NMB MinebeaMitsumi Inc.
Machanical Ass'y DIV.

UNIT (mm.) | 3RD ANGLE | SCALE : FREE

TITLE: BASE INDEX (A)

DETAILED	DESIGNED	CHECKED	APPROVED
THONGCHAI	THONGCHAI	ARTIT	ARTIT

DATE 5-01-2024 | UP DATE

DWG.NO TMA-95-0036-01A

REV. NR

SHEET: 2 OF 3

TAG	X LOC	Y LOC	SIZE
A52	192.49	-191.97	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A53	192.49	191.97	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A54	194.99	0	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A55	216.30	-27.50	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A56	216.30	27.50	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A57	219.99	-144.34	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A58	219.99	144.34	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A59	251.30	-27.50	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
A60	251.30	27.50	Ø 3.3 THRU ALL M4x0.7 - 6H THRU ALL
B1	-403.83	-27.50	Ø25
B2	-403.83	27.50	Ø25
B3	-374.87	-135.59	Ø25
B4	-374.87	135.59	Ø25
B5	-347.37	-183.22	Ø25
B6	-347.37	183.22	Ø25
B7	-268.24	-262.35	Ø25
B8	-268.24	262.35	Ø25
B9	-220.61	-289.85	Ø25
B10	-220.61	289.85	Ø25
B11	-112.51	318.82	Ø25
B12	-57.51	318.82	Ø25
B13	50.58	-289.85	Ø25
B14	50.58	289.85	Ø25
B15	98.21	-262.35	Ø25
B16	98.21	262.35	Ø25
B17	177.34	-183.22	Ø25
B18	177.34	183.22	Ø25
B19	204.84	-135.59	Ø25
B20	204.84	135.59	Ø25
B21	233.80	-27.50	Ø25
B22	233.80	27.50	Ø25
C1	-266.88	-105	Ø130
C2	-266.88	105	Ø130
C3	-85.01	-210	Ø130
C4	-85.01	210	Ø130
C5	96.85	-105	Ø130
C6	96.85	105	Ø130
D1	-195.43	-63.75	Ø 9 THRU ALL ⌴ Ø 15 ↧ 8
D2	-195.43	63.75	Ø 9 THRU ALL ⌴ Ø 15 ↧ 8
D3	-85.01	-127.50	Ø 9 THRU ALL ⌴ Ø 15 ↧ 8
D4	-85.01	127.50	Ø 9 THRU ALL ⌴ Ø 15 ↧ 8
D5	25.40	-63.75	Ø 9 THRU ALL ⌴ Ø 15 ↧ 8
D6	25.40	63.75	Ø 9 THRU ALL ⌴ Ø 15 ↧ 8
E1	-162.51	0	Ø 8 H7 +0.015 0 THRU ALL
E2	-7.51	0	Ø 8 H7 +0.015 0 THRU ALL
E3	42.49	0	Ø 8 H7 +0.015 0 THRU ALL
F1	-152.13	-38.75	Ø 6.6 THRU ALL ⌴ Ø 11 ↧ 6
F2	-152.13	38.75	Ø 6.6 THRU ALL ⌴ Ø 11 ↧ 6
F3	-85.01	-77.50	Ø 6.6 THRU ALL ⌴ Ø 11 ↧ 6
F4	-85.01	77.50	Ø 6.6 THRU ALL ⌴ Ø 11 ↧ 6
F5	-17.89	-38.75	Ø 6.6 THRU ALL ⌴ Ø 11 ↧ 6
F6	-17.89	38.75	Ø 6.6 THRU ALL ⌴ Ø 11 ↧ 6
G1	-112.51	-318.82	Ø 24 H7 +0.021 0 THRU
G2	-57.51	-318.82	Ø 24 H7 +0.021 0 THRU
L1	-85.01	0	Ø85
R1	124.99	0	Ø 20 H7 +0.021 0 THRU ALL

Note : **No Organo-silicone can be use in manufacturing process and tooling.**
if The use of these material is unvoidabel , prior written approval from NMB is required.

Minebea Copy
16/1/2568
Issued G/M and M/A Div.
Uncontrolled

DETAIL | NAME | DATE | ECN.NO. | REV.

UNLESS SPECIFIED	
C0.2 Max OR R0.2 Max (NO DENT & NO BURR)	
GENERAL TOLERANCE	
JISB0405 MACHINING WORKING	
LESS THAN 6	±0.1
6 ~ 30	±0.2
30 ~ 120	±0.3
120 ~ 400	±0.5
400 ~ 1000	±0.8

0.8 / 6.3 / 25 / 100 / ▽ / Angle ± 1°

M/C. ATVH2 **Qty.** -

MATERIAL A6063

FINISH CLEAR ANODIZE

HEAT TREATMENT. -

NMB MinebeaMitsumi Inc.
Machanical Ass'y DIV.

UNIT (mm.) | 3RD ANGLE | SCALE : FREE

TITLE BASE INDEX (A)

DETAILED	DESIGNED	CHECKED	APPROVED
THONGCHAI	THONGCHAI	ARTIT	ARTIT

DATE 5-01-2024 | UP DATE

DWG.NO TMA-95-0036-01A

SHEET: 3 OF 3

REV. NR