


Rmax=25S (G Rmax=6S)

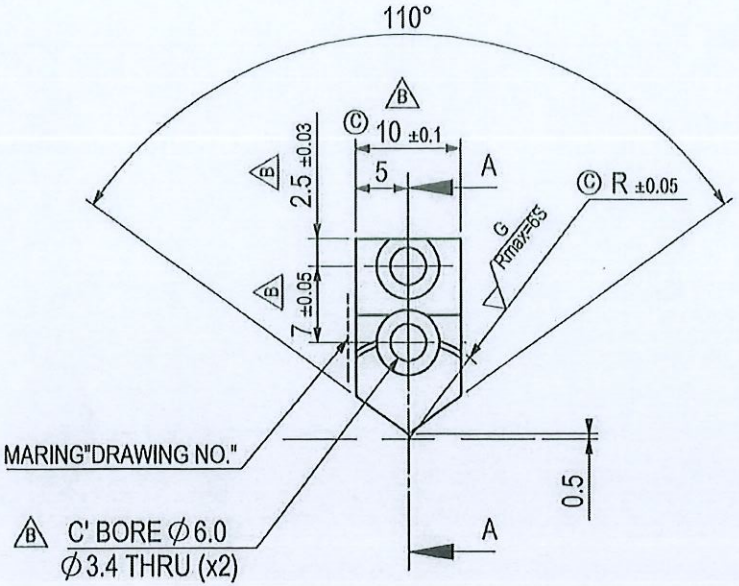

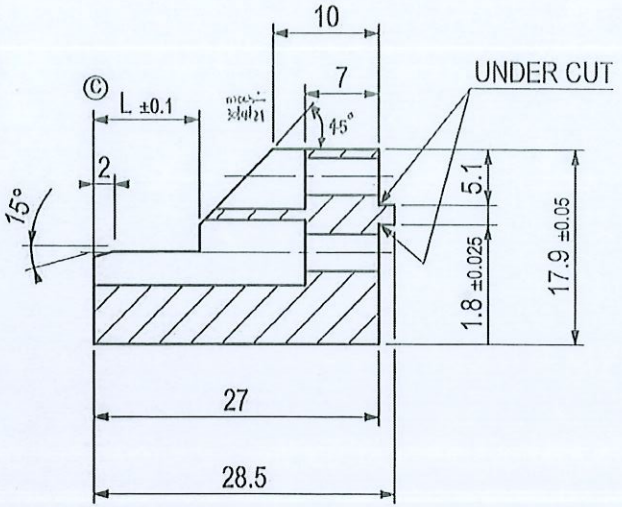

SECTION A-A



UNCONTROLLED
14 NOV 2025
Engineering Department
Precision Mechanical Component Div.

PMA ENGINEERING
Registration date
17 Aug 23
NMB MinebeaMitsumi Inc.
Precision Mechanical Assembly Division

1 SET = 3PCS

-10			
-09			
-08			
-07			
-06			
-05			
-04			
-03	10	10.5	OT- 7018-1
-02	10	9.5	OT-7018-1
-01	8	8.5	AS-6429-1A
-XX	L	R	FOR PART

NOTE : 1. © VALUE WILL BE ATTATCH IN INSPECTION DATA FROM SUPPLIER.
2. NO BURR,NO SHARP EDGE.

REV.	ECN. NO.	DATE	DESCRIPTION	NAME
A	S00222	28-DEC-16	CHANGE:120° to 110° ADD:ITEM	PREECHA
B	S00231	31-JAN-17	ADD:C' BORE ⌀6.0 ⌀3.4 THRU(x2)	PREECHA

BLANK/INSERT TIP No. : -
MAKER: -

UNLESS SPECIFIED C0.2 or R0.2
FREE BURR & DENT

GENERAL TOLERANCE		Surface
Up to 0.5	±0.05	0.8S
Over0.5 up to 6	±0.1	6S
Over 6 up to 30	±0.2	25S
Over 30 up to 120	±0.3	100S
Over 120	±0.5	UNCUT
ANGLE	±1°	

FOR MACHINE : -
MATERIAL : S45C
SURFACE TREATMENT : -
SURFACE COATING : -

DESIGN FOR PART No. : -
REFER. DRAWING No. : TGM-41-186-xx
SCALE: - | SHEET: - | UNIT : mm.

DETAILED	CHECKED	APPROVED
PREECHA	Mashri	DSato

DATE 13 AUG '2010

3rd. ANGLE

Minebea

TITLE. CHUCK JAW

DRAWING NO. TPMA-21-018-XX

REV. B