


Rt=12 (Rt=6)







DETAIL U

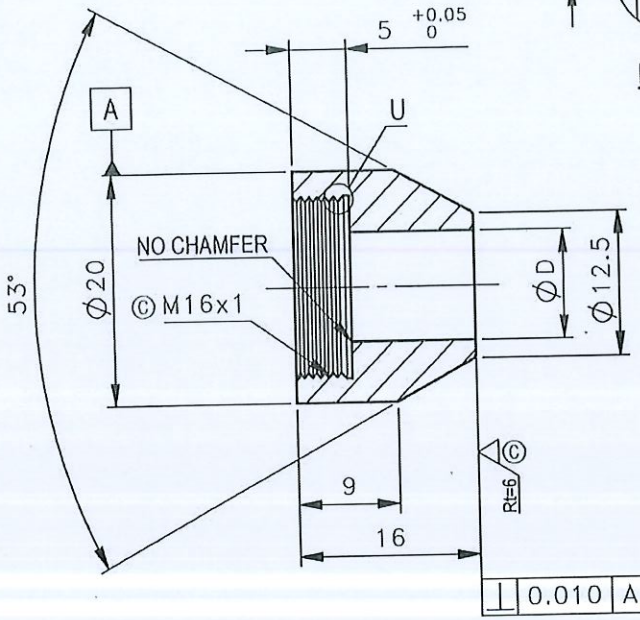

SECTION A-A

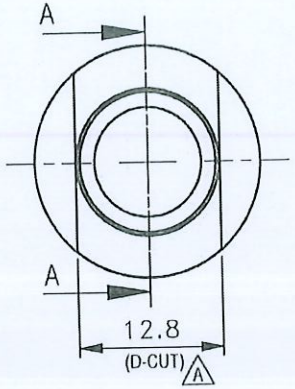

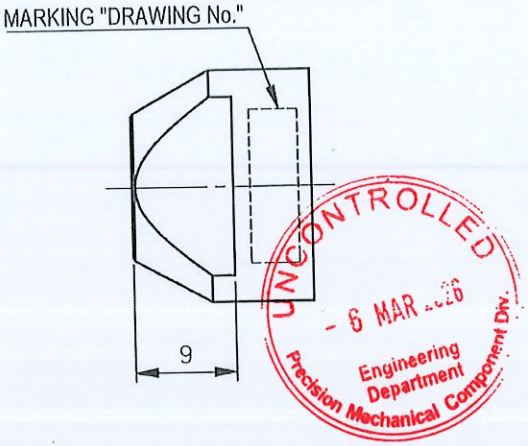

PMA ENGINEERING
Registration date
13 Nov' 24
NMB MinebeaMitsumi Inc.
Precision Mechanical Component Division

NOTE : 1. GENERAL TOLERANCE ±0.1
2. BRACK ALL CORNERS APPROX BY C0.2.
3. Ⓒ VALUE WILL BE ATTACHED IN INSPECTION DATA FROM SUPPLIER.

-05			
-04			
-03			
A -02	ϕ3	-	-
-01	ϕ9.47	-	-
-XX	ϕD	PART No.	REMARK

REV.	ECN. NO.	DATE	DESCRIPTION	NAME
NR	-	3-DEC-15	-	WORAWUT
A	P241103	8-NOV-24	ADD.: TABLE ROW No.2	WORAWUT

BLANK/INSERT TIP No. | MAKER.

UNLESS SPECIFIED C0.2 or R0.2
FREE BURR & DENT

GENERAL TOLERANCE		Surface
LESS THAN 0.5	±0.05	0.8S
0.5 - 6	±0.1	6S
OVER 6 - 30	±0.2	25S
OVER 30 - 120	±0.3	100S
OVER 120	±0.5	UNCUT
ANGLE	±1°	

FOR MACHINE: RL-20
MATERIAL: SUS304
HEAT TREATMENT: -
SURFACE COATING: -

DESIGN FOR PART No.: -
REFER DRAWING No.: TGM-41-628A-2-XX Rev.2
SCALE: 2:1 | SHEET: 1/1 | UNIT : mm.
PREPARED: WORAWUT | CHECKED | APPROVED
DATE 8 NOV '2024

3rd. ANGLE

NMB MinebeaMitsumi Inc.
Precision Mechanical Component Division

DRAWING NAME: COVER STOPPER
DRAWING NO.: TPMA-21-139-02-XX
REV.: A
SIZE A4