


Rmax=12S (Rmax=0.8)

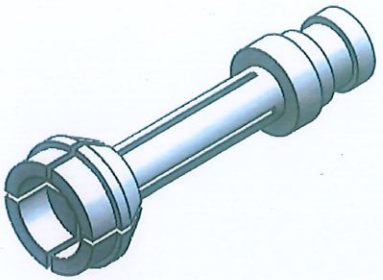

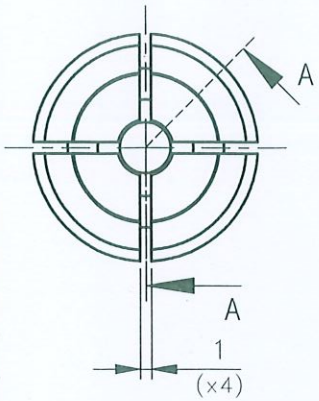

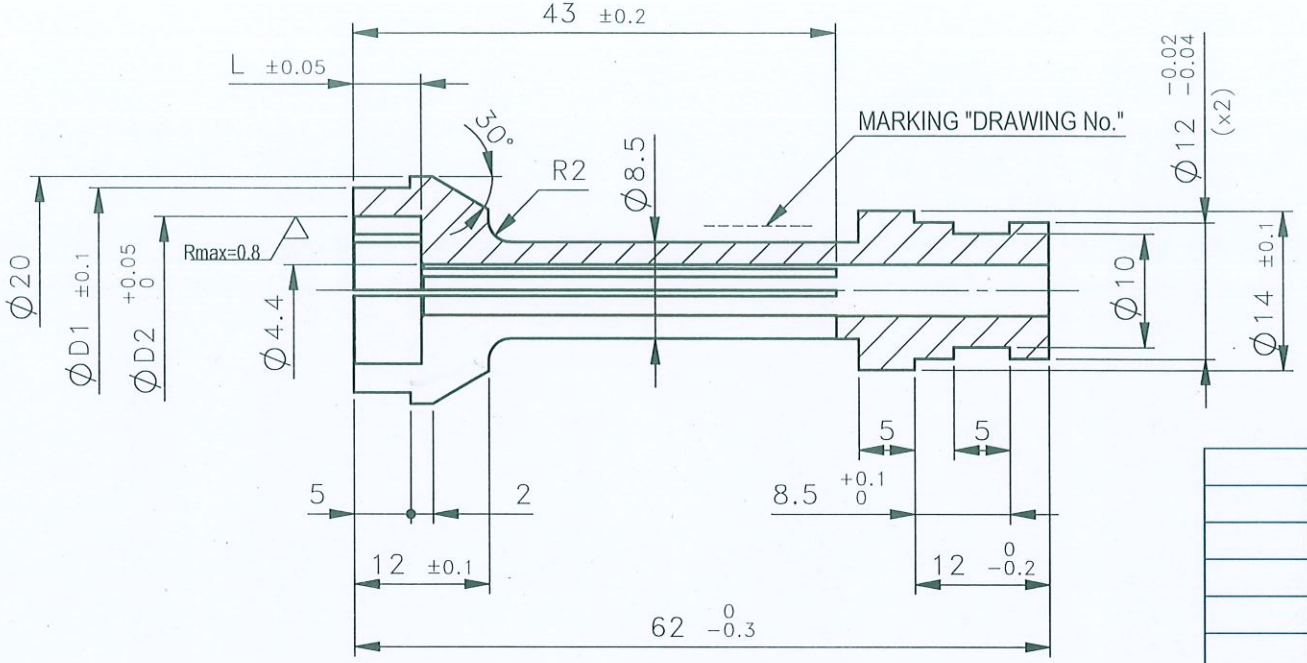

SECTION A-A

10	4.5		ϕ3.5~ϕ4
10	4	4	ϕ3~ϕ3.5
ϕD1	ϕD2	L	FOR OD PART

PMC ENGINEERING
Registration date
18 Mar '26
NMB MinebeaMitsumi Inc.
Precision Mechanical Component Division

NOTE: 1. NO BURR , NO SHARP EDGE
2. ID. ϕD2 "HEAT TREATMENT SPRING BACK 0.5"

BLANK/INSERT TIP No.	MAKER.

REV.	ECN. NO.	DATE	DESCRIPTION	NAME

UNLESS SPECIFIED C0.2 or R0.2
FREE BURR & DENT

GENERAL TOLERANCE		Surface
LESS THAN 0.5	±0.05	0.8S
0.5 - 6	±0.1	6S
OVER 6 - 30	±0.2	25S
OVER 30 - 120	±0.3	100S
OVER 120	±0.5	UNCUT
ANGLE	±1°	

FOR MACHINE: MURAKOSHI INFEED
MATERIAL: SUJ2
HEAT TREATMENT: HRC 40~45
SURFACE COATING: BLACK OXIDE

DESIGN FOR PART No.: -
REFER DRAWING No.: -
SCALE: 1:1 | SHEET: 1 / 1 | UNIT : mm.
PREPARED: WORAWUT | CHECKED | APPROVED
DATE: 17 MAR '2026

3rd. ANGLE

NMB MinebeaMitsumi Inc.
Precision Mechanical Component Division

DRAWING NAME: COLLET CHUCK
DRAWING NO.: TPMA-31CL-006A-D2-L
REV.: NR

SIZE A4