

Ra=6.3 (G Ra=0.8 , G Ra=0.4)



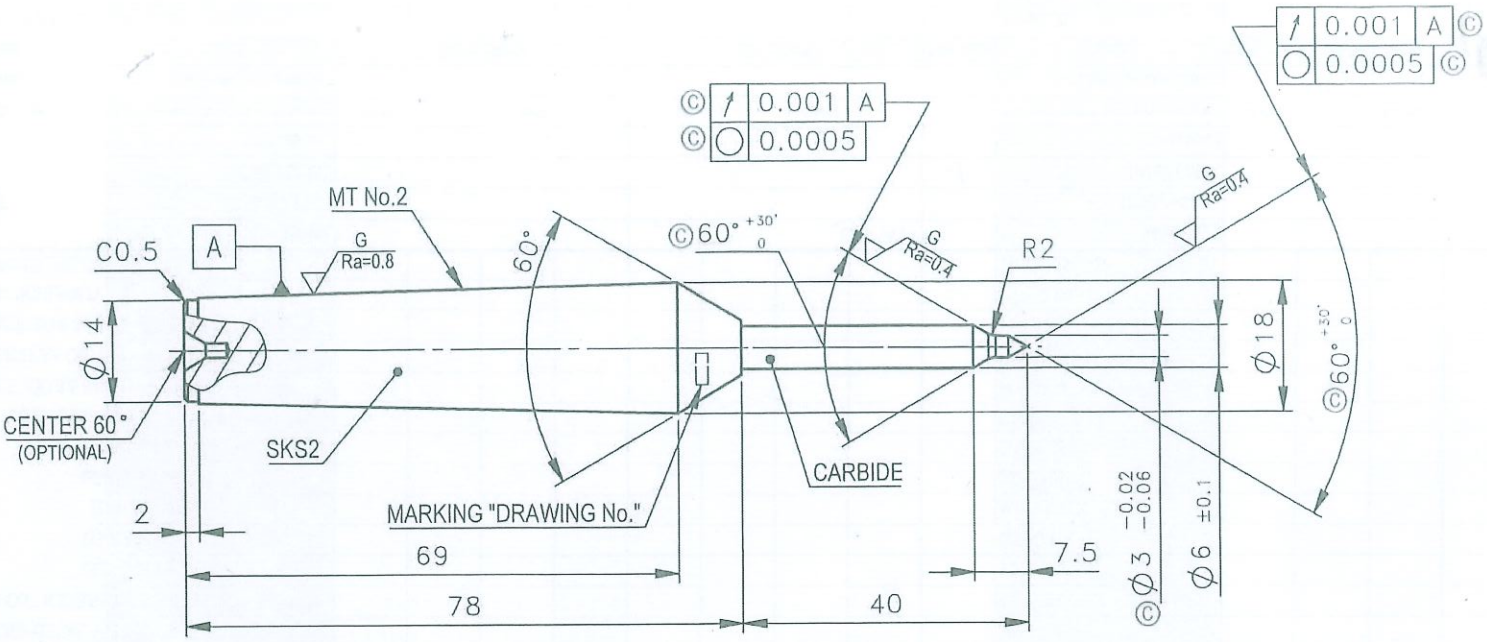

NOTE : 1. Ⓒ VALUE WILL BE ATTACHED IN INSPECTION DATA FROM SUPPLIER.
2. NO BURR , NO SHARP EDGE.

PMA ENGINEERING
Registration date
11 Dec' 24
NMB MinebeaMitsumi Inc.
Precision Mechanical Component Division

REV.	ECN. NO.	DATE	DESCRIPTION	NAME

BLANK/INSERT TIP No. | MAKER.

UNLESS SPECIFIED C0.2 or R0.2
FREE BURR & DENT

GENERAL TOLERANCE		Surface
LESS THAN 0.5	±0.05	0.8S
0.5 - 6	±0.1	6S
OVER 6 - 30	±0.2	25S
OVER 30 - 120	±0.3	100S
OVER 120	±0.5	
ANGLE	±1°	UNCUT

FOR MACHINE: G18
MATERIAL: SKS2/CARBIDE
HEAT TREATMENT: -
SURFACE COATING: -

DESIGN FOR PART No.: OT-9551,OT-9552
REFER DRAWING No.: -
SCALE: 1:1 | SHEET: 1 / 1 | UNIT : mm.
PREPARED: WORAWUT | CHECKED: Jirapat | APPROVED: Attapo
DATE: 10 DEC '2024

3rd. ANGLE

NMB MinebeaMitsumi Inc.
Precision Mechanical Component Division

DRAWING NAME: CENTER JIG
DRAWING NO.: TPMA-41-485
REV.: NR

SIZE A4